October 1963
50¢

CQ

UNIVERSITY OF ILLINOIS
LIBRARY
OCT 7 1963
CHICAGO

A Table-Top 2 Kw Linear

See page 30

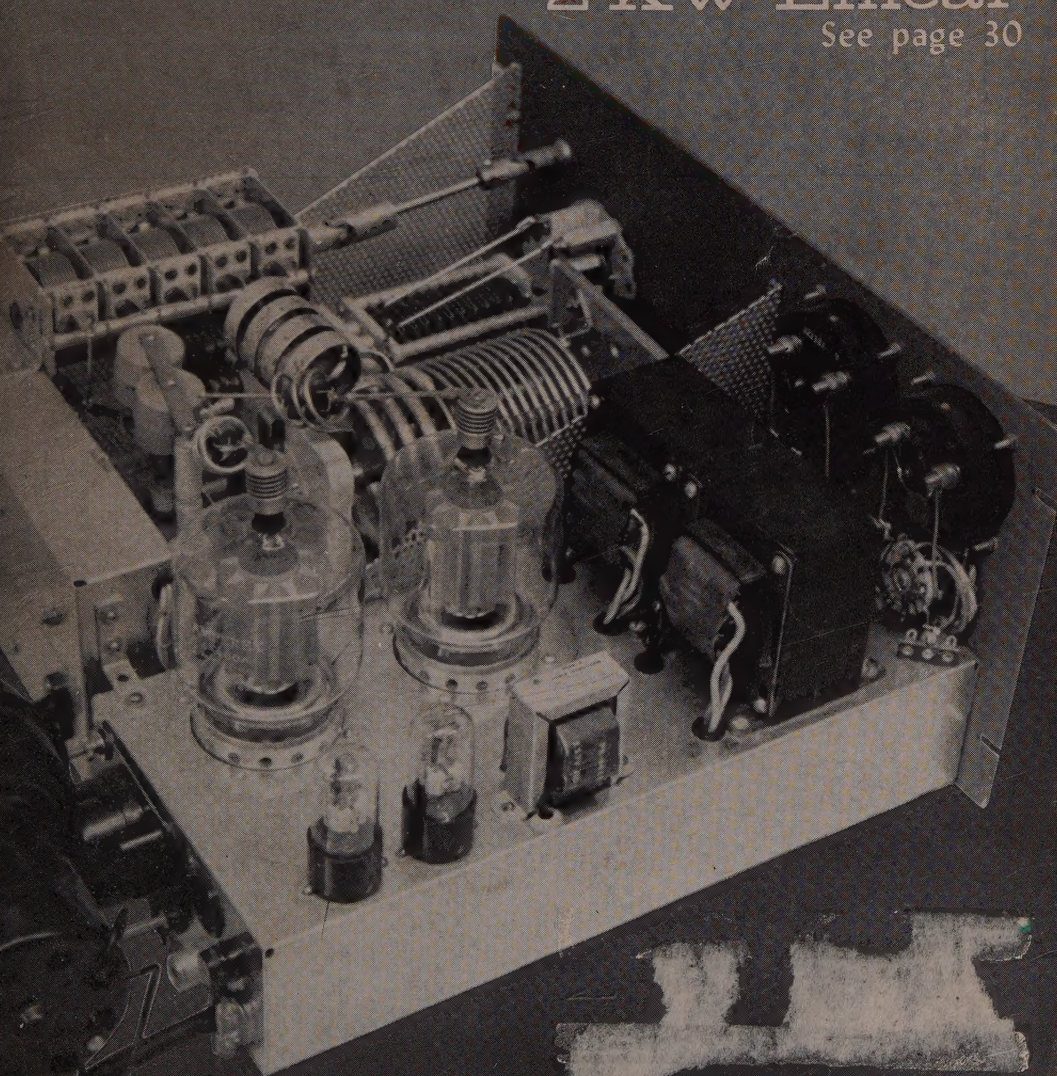

The Radio Amateur's Journal

talk about

TALK POWER

No other comparable equipment gives you more talk power than the compact, portable 30L-1 Linear with exclusive automatic load control. The 30L-1 provides a conservatively 1,000 watts PEP input on SSB (500 watts average dc) and 1,000 watts average on CW designed to be driven by the KWM-1, KWM-2, 32S-3 or most other 70-100 watt CW exciters. When used with the KWM-2, you can have a kilowatt station in two suitcase more talk power is just one of the 30L-1 features. You'll also find solid state rectifiers which reduce heat. There's a self-contained power supply with safety interlocks. An automatic antenna transfer, a high/low power capability, and an RF inverse feedback. Get the facts on more talk power and all the other features offered you in the Collins 30L-1 Linear. For free copy of Collins amateur catalog, see your distributor today. ☐



COLLINS

For further information, check number 59, on page 110

SUREST WAY TO T9X

PR CRYSTALS give you the finest frequency control that money can buy! PRs are built to PERFORM...under good conditions and bad. They have that extra measure of stability and dependability BUILT-IN . . . that *plus* of rugged precision that means years of unfailing service.

With PRs in your rig, you KNOW your signals are going out clear and strong and right on the frequency. You get longer distance, clearer reception, less drift. Yes, PRs are the SURE ROAD TO T9X. Get them from your radio parts jobber. EVERY PR CRYSTAL IS UNCONDITIONALLY GUARANTEED.

PR CRYSTALS

AMATEUR TYPES

Fundamental, PR Type Z-2

Frequency Ranges in Kcs.: 3,500 to 4,000 (80M); 7,000 to 7,425 (40M); 8,000 to 8,222 (2M); 8,334 to 9,000 (6M).

Rugged. Low drift, fundamental oscillators. High activity and power output. Stands up under maximum crystal currents. Stable, long-lasting; ± 500 cycles . . . . . **$2.95** Net (All Z-2 Crystals calibrated with a load of 32 mmfd.)

AMATEUR TYPES



Third Overtone, PR Type Z-9A

Hermetically sealed; calibrated 24,000 to 24,666 and 25,000 to 27,000 Kc., ± 3 Kc.; .050" pins. . **$3.95** Net

6 Meters, PR Type Z-9A

Fifth overtone; for operating directly in 6-meter band; hermetically sealed; calibrated 50 to 54 Mc., ± 15 Kc.; .050" pins.

. . . . . **$4.95** Net

CITIZENS BAND CLASS "D"

Type Z-9R, Transmitter

FCC assigned frequencies in megacycles: 26.965, 26.975, 26.985, 27.005, 27.015, 27.025, 27.035, 27.055, 27.065, 27.075, 27.085, 27.105, 27.115, 27.125, 27.135, 27.155, 27.165, 27.175, 27.185, 27.205, 27.215, 27.225, 27.255, calibrated to .005%. (Be sure to specify manufacturer and model number of equipment) . . . . . **$2.95** Net



Type Z-9R, Receiver

Calibrated to .005%. (Be sure to specify manufacturer and model number of equipment . . . . . **$2.95** Net

Type Z-9R, Radio Control

FCC assigned frequencies in megacycles: 26.995, 27.045, 27.095, 27.145, 27.195, 27.255; calibrated to .005% (Be sure to specify manufacturer and model number of equipment.)

. . . . . **$2.95** Net

Type Z-1, MARS and CAP

Official assigned frequencies in the range. Calibrated to .005%. 1600 to 10000 Kc. . . **$3.45** Net

Type 2XP

Suitable for converters, experimental etc. Same holder dimensions as Type Z-2. 1600 to 12000 Kc., (Fund.) ± 5 Kc. **$3.45** Net

12001 to 25000 Kc. (3rd Overtone) ± 10 Kc. . . . . **$4.45** Net

Type Z-6A, Frequency Standard

To determine band edge. To keep the VFO and receiver properly calibrated. .050" pins. 100 Kc. . . . . **$6.95** Net

PR Crystals

Since 1934

USE PR AND KNOW WHERE YOU ARE

PETERSEN RADIO COMPANY, INC.
COUNCIL BLUFFS, U.S.A.

COMMERCIAL CRYSTALS AVAILABLE FROM 100 KC. TO 70 MC. PRICES ON REQUEST.

For further information, check number 1, on page 110

one good thing leads to another...

A single word, rather than any single feature, accounts for the enthusiastic acceptance we've experienced with the SX-117. The word is *"Versatility."*

No other receiver in its class lets you work so much territory so well —wherever your present or future interests may lie.

For instance: You get all important coverage from 3.0 Mc. through 30 Mc. (five crystals provided) plus four positions from 85 kc.—3 Mc. for use with HA-10 low freq. tuner.

You get *three-step variable selectivity*, including a transmitter-type V.F.O. that can be *locked on frequency* . . . less than *1 μv* sensitivity . . . extreme electrical and mechanical *stability* . . . up to *50 db.* attenuation to unwanted heterodyne in the pass band.

Looking ahead, you'll find interesting the oscillator output jacks for transceive operation with Hallicrafters' HT-44 matching transmitter.

The SX-117 costs $379.95. The HA-10 adds just $24.95 (less low freq. crystals).

SX-117 triple-conversion receiver by hallicrafters

5th & Kostner Aves., Chicago 24, Ill.

Export: Hallicrafters, International Dept., Commercial Div. **Canada:** Gould Sales Co., Montreal,

CQ

The Radio Amateur's Journal

Vol. 19, No. 10 October 1963

Editorial Staff

EDITOR
A. S. TROSSMAN, W2DTJ
MANAGING EDITOR
RICHARD A. ROSS, K2MGA
TECHNICAL EDITOR
IRVING TEPPER
TECHNICAL DIRECTOR
W. M. SCHERER, W2AEF

CONTRIBUTING EDITORS
CONTEST CALENDAR
FRANK ANZALONE, W1WY
USA-CA CUSTODIAN
CLIF EVANS, K6BX
PROPAGATION
SPACE COMMUNICATIONS
GEORGE JACOBS, W3ASK
RTTY
BYRON KRETZMAN, W2JTP
DX
TURB LE JEUNE, W2DEC
YL
LOUISA B. SANDO, W5RZJ
HAM CLINIC
J. SCHAUERS, W4VZO/HB9
SIDEBAND
DOT STRAUBER, K2MGE
IRVING STRAUBER, K2HEA

BUSINESS STAFF
PUBLISHER
S. R. COWAN
ADVERTISING REPRESENTATIVES
JACK SCHNEIDER, WA2FPE
DICK COWAN, WA2LRO
CIRCULATION MANAGER
HAL WEISNER, WA2OBR
PRODUCTION MANAGER
CARY L. COWAN
ART DIRECTOR
MICHAEL A. DOMINGUEZ

OFFICES
300 West 43rd Street
New York 36, N. Y.
Telephone, 201 JUdson 2-4460

...—(Title registered U. S. Post Office) is published monthly by ...wan Publishing Corp. Second ...ss postage paid at New York, ... Y. and at Garden City, New ...rk. Subscription Rates: U.S.A. ...d Possessions, APO, FPO, Can... and Mexico: one year $5.00; ... years $9.00; three years ...00. Pan-American and foreign, ... year $6.00; two years $11.00; ...ee years $16.00. Printed in the ...S.A. Entire contents copyright ...3 by Cowan Publishing Corp. ... does not assume responsibility ... unsolicited manuscripts. Post...ster: send Form 3579 to *CQ* ... W. 43rd St., N.Y., N.Y., 10036.

Table of Contents

A 2 KW PEP Linear Amplifier..*M. D. Smith, WA4DXP* 30

Twoer and Sixer Modifications....*Tom Beckett, W5IUU* 34

Project Interference, Part I.....*John H. Grady, K4TUA* 36

New Amateur Products: Amplidyne VHF Equipment.... 38

A Cascode Pre-Amp for 14 and 21 Mc.....*E. H. Marriner, W6BLZ* 39

How About That?.....*Muriel Gorman* 40

Modifying The Millen 90800 Exciter.....*David T. Geiser, WA2ANU* 41

The RSGB Golden Jubilee..... 43

Reviewing the Radio Classics: Extra Wide-Band Antennas.....*David T. Geiser, WA2ANU* 45

Results of The 7th Annual *CQ* S.S.B. DX Contest....*Irv & Dorothy Strauber, K2HEA/K2MGE* 47

CQ Reviews: The B&W 6100 Transmitter..... 49

The V.H.F. Amateur..... 69

Santo Domingo on Six.....*Harold Lund, VP7CX* 73

Easy Way to 220.....*Michael W. McKay, W2GRS* 74

The "Phaser" for Two Meters.....*John A. Fredricks, K7GGJ* 76

Departments

Announcements 18
Contest Calendar 63
DX 52
Ham Clinic 65
Ham Shop 107
Letters 14
Novice 58
Propagation 55
QSL Contest 22
RTTY 66
Space Communications 59
USA-CA 61
YL 68
Zero Bias 5

C-P COMMUNICATION ANTENNA SYSTEMS

—mean CERTIFIED PERFORMANCE!

BASE STATION STORM CHAMPION† UNITY-GAIN ANTENNA (Heavy-Duty, Precipitation-Static Resistant)



Electrical Specifications:

Nominal input impedance.....50 ohms
Maximum power input.....500 watts
Internal feedline RG-8A/U
Flexible terminal extension.....18" of RG-8A/U
Termination .....Type N male with Neoprene housing
VSWR 1.5:1
Bandwidth .....±1%
Lightning protection .....Direct ground

Mechanical Specifications:

Radiating element.....2" dia. red brass tube
Radiating element housing 3" dia. fiberglass tube
Support pipe .....4" dia. hot-galvanized steel, 24" length available for mounting
Rated wind velocity.....100 MPH with ½" of ice
Lateral thrust at rated wind and ice load.....150 lbs. at 30 Mc
Bending moment 6" below top of support tube at rated wind and ice load.....1400 ft. lbs. at 30 Mc
Weight.....80 lbs. at 30 Mc

Cat. No. 175-509 Frequency Range 30-50 MC*

Cat. No. 175-509 STORM CHAMPION Antenna is designed for service in areas where maximum physical strength and/or resistance to precipitation static is required. The antenna consists of a galvanized steel element support tube running from the grounded antenna base through the entire structure to a lightning arresting device at the extreme top. The shunt-fed coaxial radiating element is mounted on this element support tube and the entire structure inserted into a fiberglass tube which is permanently sealed. This design results in a reduction of precipitation static interference in the order of 20 db. This noise reduction will permit a communication system to render effective service when nearby installations with exposed radiators are completely inoperative.

*Exact frequency must be specified †Formerly STORM/MASTER

SINCE 1933

COMMUNICATION ANTENNA SYSTEMS FOR AMERICAN BUSINESS

Communication Products Company
DIVISION OF
PHELPS DODGE ELECTRONIC PRODUCTS CORPORATION

MARLBORO, NEW JERSEY — Telephone HOpkins 2-1880 (Area Code 201)
LOS ANGELES 65, CALIF. — Telephone CHapman 5-1143 (Area Code 213)

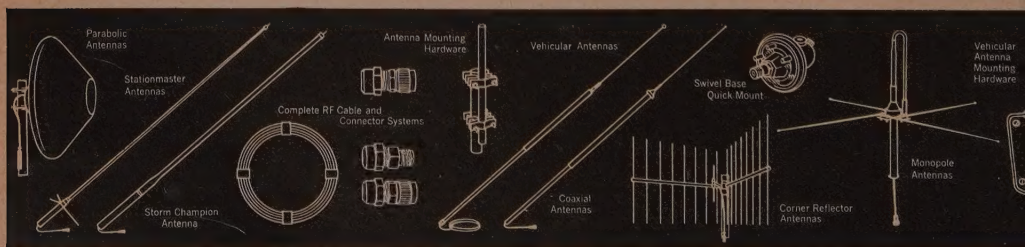

ZERO BIAS

Are newly licensed amateurs totally unprepared to meet today's challenge of operating a radio station? Are they completely unprepared to apply practical operating technique to a situation requiring both academic as well as practical skills?

Just what is it that makes one operator appear better than another? When given a dozen or so amateurs, all licensed an equal number of years and all having similar code speeds, why will one or two always outshine the others? Why has more anxiety recently been voiced on the operating characteristics found on the bands?

We think it has a great deal to do with the improper pre-training period prior to the amateur receiving his license as well as a complete lack of self-training following the General exam.

It is a known fact that a great many amateurs buy and/or build *nothing* until they are sure that their ticket hangs securely on the wall. Many prospective hams therefore never have the ability or desire to "listen in" before exam time. Some General class licensees, embarrassed to make the effort through the Novice ranks are completely flabbergasted by the QRM. "My code records were never like this!" cries the unbelieving brass-pounder.

Whether your choice of mode be phone or c.w. there's certainly more to operating than knowing the Q-code or memorizing a page or two from the operating section of a handbook.

The trouble probably lies with the well meaning club, which as an effort to stimulate membership and attendance, offers code practice classes, with little or no thought to practical on-the-air operation. Few clubs go beyond the code-oscillator/hand-key type lesson. Clubs lucky enough to meet at a place having a working station invariably use the rig for a local ragchew after the meeting adjourns rather than for practical instruction for the beginner.

The old timer too, has lost much of this status as one who takes newcomers under his wing. Years ago it was almost unwritten law that an experienced amateur be required to "show the ropes" to an s.w.l. Today, it has become "Let George do it."

Many times a prospective amateur will accidentally fall into the clutches of one who is as inexperienced as himself. Naturally, the results are disheartening and indeed time consuming, considering the relearning period involved.

Many newly licensed amateurs and some old ones too are quick to mistakenly evaluate the "Roger-Roger-Over-and-Out" operator as one to emulate. If his operations seem professional and it goes uncorrected, what's a poor fellow to think?

The true DX operator and the traffic handler seem to be the overall standouts in operating technique. In the DXers case the infamous "Black List" (which should probably be used more often) keeps the operator aware that any misconduct on the air will not be tolerated. Is it only logical, when a DX station calls "CQ W4 ONLY" he's not besieged by all ten call areas?

Although the traffic handler is not confronted with a "Black List," his skill remains high in the knowledge that traffic must pass quickly and accurately. Long drawn out messages and queries from other net members only lead to embarrassing repeats and delays. You've probably heard: "This message goes to Mrs. Helen Jones—that's a married lady—M-Mary R-Roger S-Sugar. . . ." It happens, but we're happy to say, infrequently.

We're not naive enough to think that every amateur can be a contest winner or a top traffic handler. We feel, however, that there has been too much emphasis placed on passing the code and written examination, with little emphasis on what happens after.

Unlike years past, when amateurs were almost always connected with the electronics industry, today's amateurs come from all walks of life. Whether the ham be a tinkerer, who hasn't made a contact in months, or a fellow who is on the air nightly, amateurs owe it to themselves, and to those aspiring to become amateurs, to practice self discipline, consider the other fellow, give advice freely to those who ask for it and above all not be reluctant to tell a fellow when he's making an obvious mistake.

THIS COULD BE YOUR LUCKY DAY-ENTER...GIAN

"I WISH..

Just complete this statement in 25 words or l

Over $35,000 in prize

Easy to enter, easy to win!

1 Nothing to buy! Just visit your Hallicrafters distributor listed below and secure an entry blank. (We won't mind if you look over his featured Hallicrafters display while you're there!)

2 Fill in entry blank, and complete sentence, "I WISH . . . everyone would use VHF for short range contacts because . . ." **DO NOT** MAIL ENTRY TO HALLICRAFTERS. Turn in or mail to distributor. He will select local winner on basis of originality and sincerity of statement, and award HA-2 or HA-6 local prize.

3 Local winners become eligible for GRAND NATIONAL PRIZE. Hallicrafters will select winner. All decisions final. Entries become Hallicrafters property; winners' names and statements may be published.

one of OVER 60 HA-2 or HA-6
TRANSVERTERS WITH POWER SUPP
...OR THIS FABULOUS, DELUXE
HALLICRAFTERS **SSB**/AM/CW STATIC

CALIFORNIA
Anaheim: Henry Radio, Inc.
Los Angeles: Henry Radio, Inc.
North Hollywood: Arrow Electronics Distributors
San Jose: Quement Industrial Electronics
San Francisco:
Amrad Supply, Inc.
Zack Electronics

COLORADO
Denver:
Burstein Applebee Co.
Radio Products Sales Co.

CONNECTICUT
Hartford: Hatry of Hartford
New Haven: Radio Shack Corp.
West Hartford: Radio Shack Corp.

FLORIDA
Jacksonville:
Kinkade Radio Supply, Inc.
Miami: Amateur Radio Center, Inc.
Orlando: Amateur Electronic Supply

GEORGIA
Atlanta: Specialty Distri

ILLINOIS
Chicago:
Allied Radio Corp.
Amateur Electronic S
Genoa: Crawford Electro
Lincoln: Hursh Radio &

INDIANA
Indianapolis: Van Sickl

IOWA
Council Bluffs: World R
Laboratories, Inc.
Des Moines: Radio Trad
Co.

MARYLAND
Wheaton: Electronic D

ALLICRAFTERS VHF WEEPSTAKES!

ISH...everyone would use VHF for short range contacts because..."

our opinion may win-

GRAND PRIZE

HT-44 transmitter (slaves with SX-117 for transceive operation) . . . HT-45 "Loudenboomer" amplifier . . . SX-117 triple conversion receiver . . . R-47 speaker . . . HA-10 low freq. converter . . . HA-1 "T.O." keyer . . . HA-8 Splatter Guard . . . P-150 AC and P-45 AC power supplies.

USETTS

bro Radio Supply Co.
te Radio
Shack Corp.
: Radio Shack Corp.
DeMambro Radio Supply Co.
afayette Radio
Graham Radio, Inc.
Radio Shack Corp.

I

teno Radio
pids: Radio Parts, Inc.

I

enry Radio
Walter Ashe Radio Company

MPSHIRE

Evans Radio Co.
er: DeMambro Radio Supply Co.

SEY

NEW YORK

Farmingdale L.I.: Arrow Electronics, Inc.
Jamaica, L.I.: Harrison Radio Corp.
New York:
Arrow Electronics, Inc.
Harrison Radio Corp.
Harvey Radio Co.
Terminal-Hudson Electronics, Inc.

OHIO

Cleveland: Bernie's Ham Shack
Toledo: Selectronic Supplies, Inc.
Youngstown: Armie's Electronics

PENNSYLVANIA

Blairsville: Holiday Electronics
Pittsburgh: Tydings Co.
Wyncote: Ham Buerger

RHODE ISLAND

SOUTH DAKOTA

Aberdeen: Burghardt Radio Supply, Inc.
Rapid City: Burghardt Radio Supply, Inc.
Sioux Falls: Burghardt Radio Supply, Inc.
Watertown: Burghardt Radio Supply, Inc.

TEXAS

Abilene: Howard Radio
Amarillo: Capitol Electronics
Dallas: Amateur Electronics
Houston:
Busacker Electronics
Lafayette Radio Electronics
Pasadena: Lafayette Radio Electronics
San Antonio: Modern Electronics Co.

VIRGINIA

Norfolk: Priest Electronics

WISCONSIN

Milwaukee:
Allied Radio Corp.
Amateur Electronic Supply

WASHINGTON, D.C.

Everything's GO on VHF!

with hy-gain's all new complete line o BASE STATION AND MOBILE ANTENNA

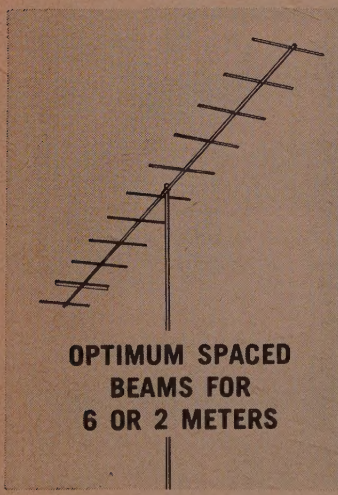

OPTIMUM SPACED BEAMS FOR 6 OR 2 METERS

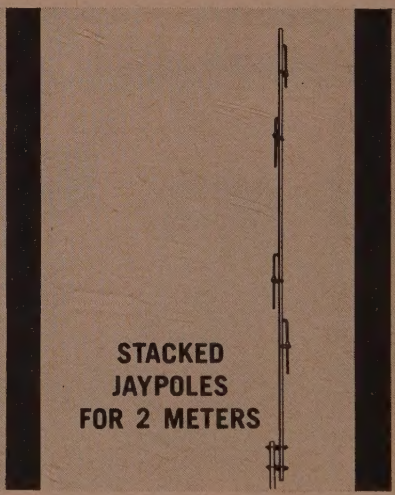

STACKED JAYPOLES FOR 2 METERS

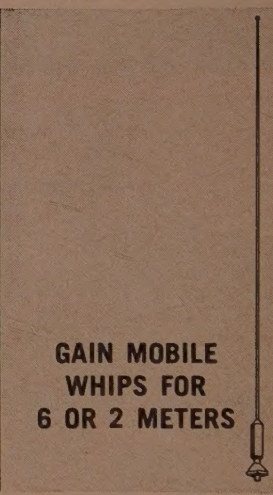

GAIN MOBILE WHIPS FOR 6 OR 2 METERS

AND THAT AIN'T ALL...there are OVER 40 MODELS including LOG PERIODICS for 6 and 2 meter 3-ELEMENT OPTIMUM SPACED BEAMS that will deliver more gain than 5-element medium or sh spaced beams...GAIN STACKED HALOS for 6 or 2 meters featuring a new peak in mechanical superio with new center mount which delivers unparalleled impedance control and true omni-directional perfo ance...Extremely compact omni-directional GAIN GROUND PLANES...Duoband 6 and 2 meter UNI GAIN GROUND PLANES...Single band and Duoband MOBILE WHIPS AND HALOS...EVERY SIGNI CANT ANTENNA CONFIGURATION KNOWN TO THE ART...All of superior mechanical and electr quality. They're all illustrated and fully described in Hy-Gain's new VHF catalog. A top performa antenna for every possible application...a price to fit every pocketbook. Prices range from as low as **$3.9**

Send for your FREE copy of Hy-Gain's full line catalog on VHF antennas TODAY...you absolutely ca afford to buy an antenna until you've looked at Hy-Gain!



I want a FREE complete line catalog on Hy-Gain's all new VHF antenna line

NAME_____

STREET_____

CITY_____ STATE_____

hy-gain ANTENNA PRODUCTS CORPORATIO
8425 NE Highway 6 Lincoln, Nebraska

For further information, check number 8, on page 110

DX on 40 METERS?

It's YOURS with hy-gain's MODEL 402B MONOBANDER

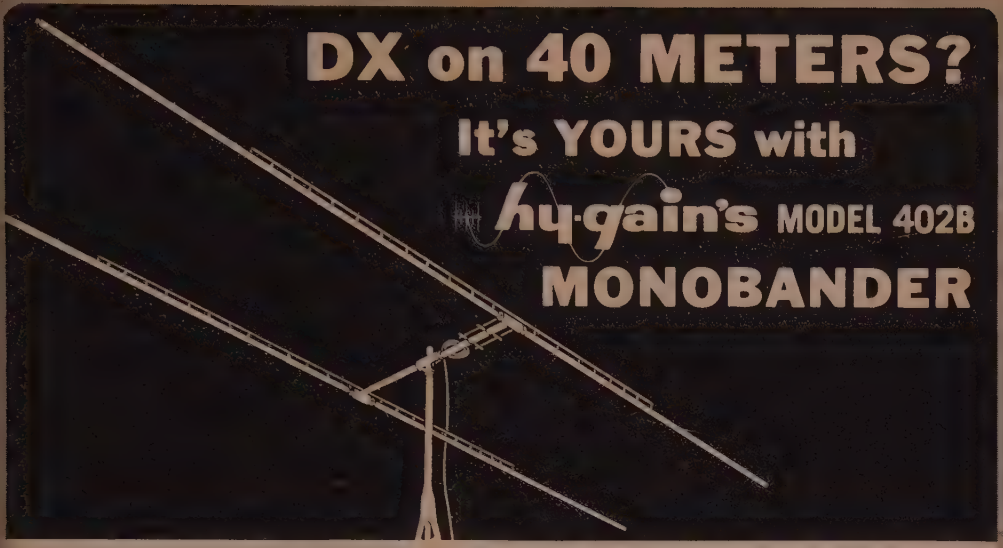

It's true... with Hy-Gain's Model 402B, you can work signals on 40 meters that you never knew existed. And, you can work 'em 24 hours a day – 365 days of the year.

Hy-Gain's 402B gives maximum obtainable forward gain and attenuation of unwanted signals off the sides and back for an antenna of this type.

How can the 402B deliver such amazing performance? Well, there are several reasons but probably the most important surrounds Hy-Gain's perfected linear loading which extends parallel along the elements and delivers maximum possible performance from a shortened antenna. Linear loading, another Hy-Gain innovation, eliminates the need for lossey center loading coils.

The 402B feeds with 52 ohm coax. Elements are 43 ft. long. The 2-inch boom is 16 ft. long. The 402B is constructed of seamless, taper-swaged aluminum tubing offering very low wind resistance. Insulators are of high impact, fiberglas impregnated plastic. All steel parts iridite treated to MIL specs. Since it weighs only 37 lbs., the 402B can easily be stacked with any tri-bander or 20 meter beam with a scant 10 ft. separation required. A sensational buy at only **$99.75** Ham Net.

New Maximum Performance on 20 and 40 Meters

hy-gain's Model DB-24 DUOBANDER

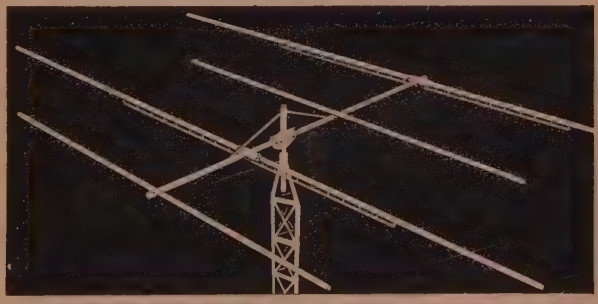

Here's an antenna that will give you the unparalleled performance of Hy-Gain's 402B on 40 meters *PLUS* full-sized 3-element performance on 20 meters – Hy-Gain's DB-24. Unique linear stub decoupling reduces the overall length of the DB-24 to ⅔ full size for 40 meters and makes possible 2-band operation without traps. Three full-sized elements on 20 meters deliver 8.1db forward gain; 20 to 30db gain in F/B ratio. Two 40-meter elements same as on Model 402B. Fed with 52 ohm coax, the DB-24 easily handles maximum legal power. Insulators are of high impact, fiberglas impregnated plastic and all steel parts are iridite treated to MIL specs. Longest element is 43 ft.; shipping weight, 64 lbs. The DB-24 is the ultimate in 20 and 40 meter antennas. Priced at **$169.50.**

See them today at your favorite Hy-Gain Distributors or write for the name of the Hy-Gain Distributor nearest you.

Hy-Gain Antenna Products Corporation 8426 N.E. Highway 6, Lincoln, Nebr.

For further information, check number 10, on page 110

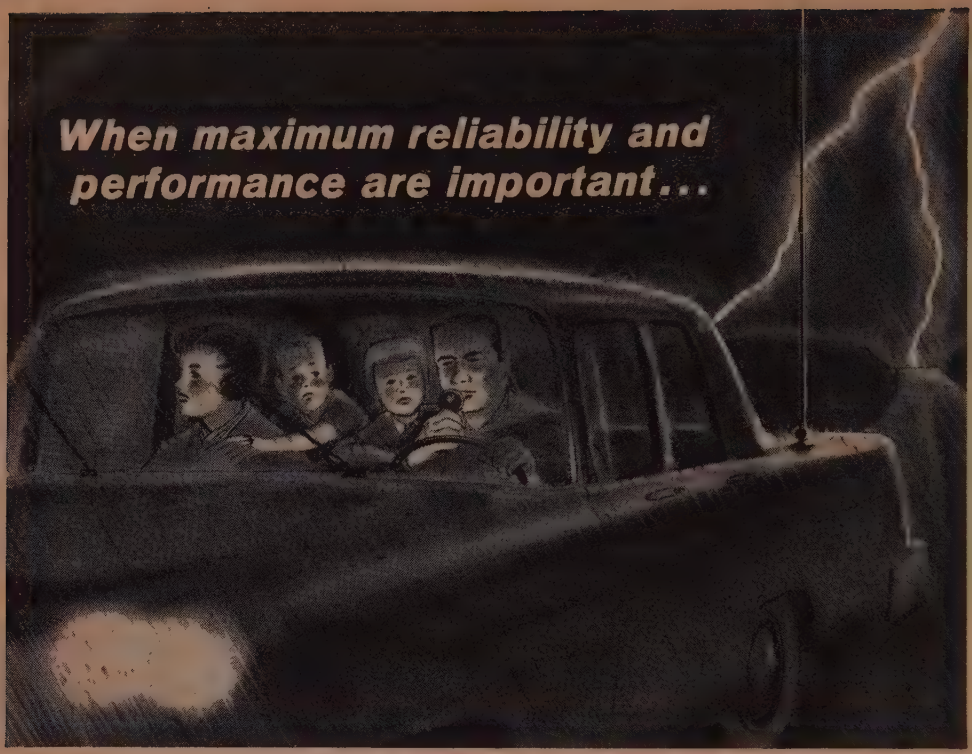

Choose the NEW MOBILE TOPPERS by hy-gain

featuring...

■ TOP LOADED DESIGN – Delivers superior performance* ■ PRECISION ADJUSTMENT TO EXACT FREQUENCY – Easily made on telescoping tip of Topper Capsule ■ NOISELESS QUICK-DISCONNECT – For changing bands in seconds... convenient for low garaging (No tools required) ■ POWER HANDLING OF 100 Watts AM; 300 Watts PEP ■ SLEEK, SLIM PROFILE – Reduces wind resistance at high speeds for greater frequency stabilization ■ WEATHERABILITY – Loading coil is totally encapsulated in durable Fiberglas Topper Capsule ■ VERSATILITY – 5 ft. Topper Capsules for 10, 15, 20, 40 and 75 meters... all equipped with male "Quick-Disconnect" ■ RUGGED 36" POLISHED STEEL MAST – Fits any standard body or bumper mount... equipped with female "Quick-Disconnect"



POPULARLY PRICED

TL-10 Topper Capsule for 10 Meters.....	$ 5.95
TL-15 Topper Capsule for 15 Meters.....	$ 6.95
TL-20 Topper Capsule for 20 Meters.....	$ 7.95
TL-40 Topper Capsule for 40 Meters.....	$ 9.95
TL-75 Topper Capsule for 75 Meters.....	$11.95
Universal TM-36 Mast Section (Use with Topper Capsule ONLY).....	$ 7.95

*It is acknowledged that to attain maximum efficiency from installing a loading coil in an antenna, the loading coil must be installed at or near the top of the antenna. By loading the top of the antenna, the efficient current section of the antenna may then be left at natural length. Top loading also raises the feed point impedance from which a superior transfer of energy results, because of the small diameter of the loading coil, top loaded antennas offer the additional advantage of superior mechanical reliability.

See the New Hy-Gain Mobile Toppers at your Favorite Hy-Gain Distributors or Write for Complete Engineering Report to:

HY-GAIN ANTENNA PRODUCTS CORPORATION

8427 N.E. Highway 6 Lincoln, Nebraska

For further information, check number 9, on page 110

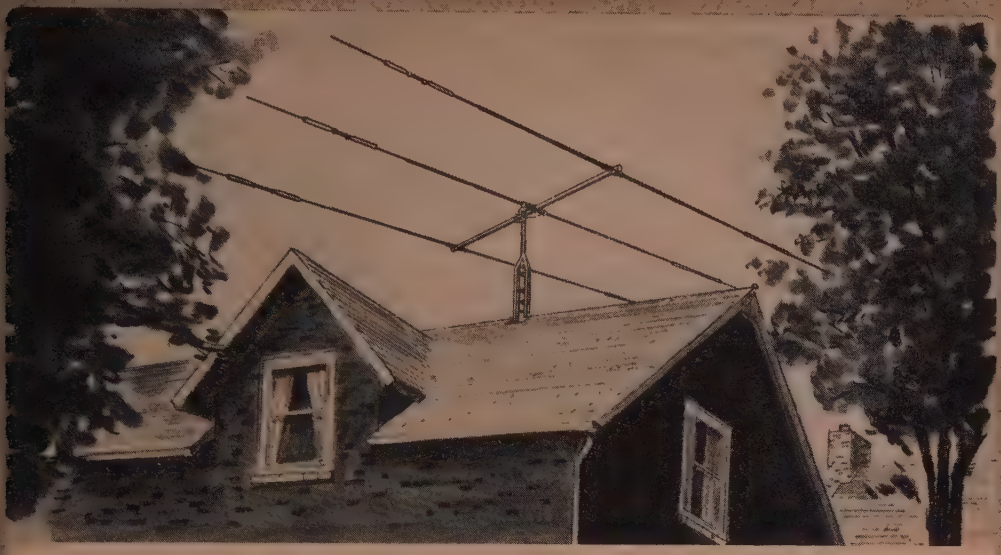

Announcing **hy-gain's new 3-element**

THUNDERBIRD JUNIOR

for maximum performance in limited space

- Up to 8db Forward Gain
- 25db Front-to-Back Ratio
- Takes up to 300 Watts AM; 600 Watts P.E.P.
- SWR Less than 1.5:1 at Resonance

Now...a famous Hy-Gain Thunderbird Tribander for the Ham with severe space limitations who wants top performance on 10, 15 and 20 meters... Hy-Gain's all new Model TH-3Jr.

Constructed of durable, lightweight taper-swaged aluminum tubing, the TH-3Jr offers very low wind resistance and can be easily rotated with a heavy duty TV rotator. Weighing only 28 pounds, it's ideal for rooftop or lightweight tower installations. Features include famous Hy-Gain Slim Line Junior Traps; hardware that is iridite treated to MIL specs; and, molded high-impact cycolac plastic insulators.

The TH-3Jr has a 12-foot boom with the longest element being 26 feet. It has a turning radius of 14'9". Easily installed, the TH-3Jr can also be quickly disassembled making it ideal for high performance portable use.

It's a real buy at **$69.50** Ham Net.



Injection molded plastic sleeve effectively insulates elements under high power conditions and transfers all mechanical stress to die-formed heavy aluminum bracket.

Unique new lightweight high reliability trap utilizes high impact styron coil form for frequency stability... is completely enclosed in die-formed aluminum for mechanical strength and lifetime weatherability.



Rugged die-formed, all aluminum boom to mast bracket clamps securely to any mast diameter of 1¼ to 1⅝ inches O.D. Facilitates easy one-man installation.

Get yours today from your favorite Hy-Gain Distributor or write for the name of the distributor nearest you.

HY-GAIN ANTENNA PRODUCTS CORPORATION
8428 N.E. Highway 6, Lincoln, Nebraska

For further information, check number 11, on page 110

NOW ARRIVING ON TRACK SIX!

Clegg's VENUS 6 TRANSCEIVER

A COMPLETE SSB STATION FOR 6 METERS

Yes, the long awaited VENUS 6 SSB TRANSCEIVER is now being delivered to your distri tors. We take this opportunity to thank the hundreds of hams who have waited so long and patie for their orders to be filled.

As the result of the acquisition of Clegg Laboratories by Squires-Sanders, Inc. (see page the design and production of more and better new Clegg products will move forward rapidly. cellent financing and a completely ham oriented program have resulted in vastly improved t quality control and manufacturing facilities and, as the VENUS 6, the first in this new line products makes its bow, its superior design and construction features will be readily apparent.

The VENUS 6, a high quality compact attractively styled SSB RECEIVER and TRANSM TER, puts you on 50 Mc single sideband without all the fuss, bother and expense associa with adapting low frequency SSB exciters, relays and linear amplifiers, Its 20 tubes and 4 se conductors provide performance equivalent to 35 tubes.

The VENUS employs all the latest circuit techniques including crystal lattice filter, anced beam tube modulator, low noise NUVISTOR front end and the newly conceived RECEI OFFSET tuning.

Packaging is sturdy, attractive and, most important . . . designed for maximum opera convenience. The same dial assembly that has drawn thousands of raves from ZEUS and INT CEPTOR owners has been further refined for use in the VENUS. Accurate 1 KC per division formance, so desirable for SSB, is further supplemented with a precision electrical vernier. effective IF noise limiter with adjustable threshold provides excellent rejection of impulse n on SSB, AM or CW.

See your Distributor or write for information.

Clegg LABORATORIES
Division of Squires-Sanders, Inc.

RT. 53, MT. TABOR, N.
TELEPHONE 627-6800

For further information, check number 12, on page 110

Clegg Laboratories, well known for high-performance VHF equipment — the Zeus transmitter, Interceptor receiver, Thor 6 and 99'er 6 meter transceivers — has recently become a division of Squires-Sanders, Inc. Amateurs interested in VHF will find that this means a vastly better Clegg — as the result of excellent technical support and financial backing, plus association with a company whose entire interests center upon superior amateur communications equipment.

Squires-Sanders recent technical innovations, which have resulted in a truly remarkable line of HF amateur equipment, give this announcement even greater significance to the amateur fraternity. The combined product lines will thus include equipment of the highest quality for *both VHF and HF* — produced by a company whose principals have both a strong professional and technical background and a deep interest in amateur radio.

D. F. SANDERS, President

A founder and president of Stavid Engineering, Inc. and subsequently president of Lockheed Electronics Company. Squires-Sanders Directors include ALDEN R. LOOSLI, General Manager, Fibres Division, American Cyanamid; RANDOLPH B. MARSTON, Associate of Laurance S. Rockefeller; and JAMES W. WALKER, Vice President of Brady Security and Realty Corp.

WILLIAM K. SQUIRES, W2PUL, Vice President

Former Chief Scientist for Lockheed Electronics Company and previously with the Rand Corporation, president of Telemeter Magnetics (now a division of Ampex), and supervisor of advanced development for the Radio and Television Division of Sylvania Electric Products.

EDWARD T. CLEGG, W2LOY, Clegg Laboratories Division

A founder and president of Clegg Laboratories since 1951. Formerly vice president of Transistor Devices, Inc., of which Clegg Laboratories was a division. Responsible for many original developments in VHF communications equipment, including all Clegg amateur products. Extensive prior background in military communications and countermeasures.

SS-1-R is the designation for the first *Squires-Sanders* product — a 3.5 to 30 MC, amateur band, AM/SSB/CW receiver having performance characteristics superior to previously available equipment. The SS-1-R will feature unparalleled freedom from overload and cross modulation* plus excellent sensitivity, selectivity and image rejection. Digital read-out of frequency, automatic all-band calibration with WWV and a motor driven tuning mechanism are just some of the unusual refinements. A pre-IF noise silencer accessory that literally eliminates the majority of impulse noise will complement the receiver.

The SS-1-R and the Silencer are already "on the air" in field testing. They will be available at your favorite dealer soon.

*See "A New Approach to Receiver Front End Design", W. K. Squires, QST, September 1963

Squires - Sanders, Inc.

475 WATCHUNG AVENUE, WATCHUNG, N. J.

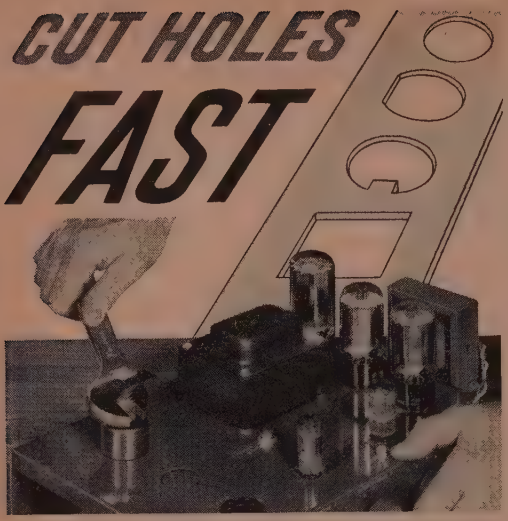

GREENLEE CHASSIS PUNCHES

Make accurate, finished holes in 1½ minutes or less in metal, hard rubber and plastics. No tedious sawing or filing—a few turns of the wrench does the job. All standard sizes . . . round, square, key, or "D" shapes for sockets, switches, meters, etc. At your electronic parts dealer. Literature on request.

GREENLEE TOOL CO. GREENLEE
2028 Columbia Ave., Rockford, Illinois
For further information, check number 4, on page 110

FREE

GIANT NEW CATALOG

100's OF BIG PAGES CRAMMED WITH SAVINGS

BURSTEIN-APPLEBEE CO.
Dept. IE, 1012 McGee St., Kansas City 6, Mo.
☐ Rush me FREE 1964 B-A Catalog.
SEND FOR IT TODAY
Name .....
Address .....
City ..... State .....
FREE

For further information, check number 5, on page 110

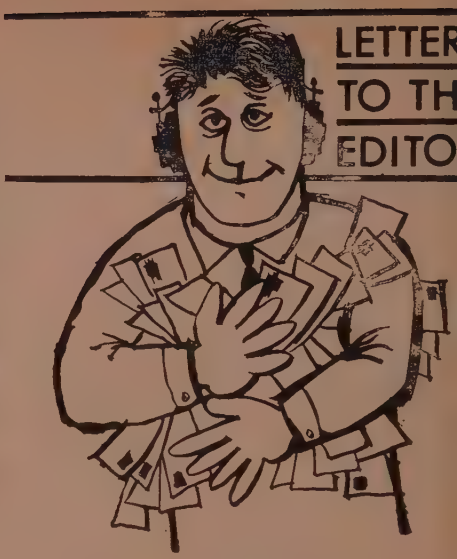

Unity Needed

Editor, *CQ:*

Relative to the content of Zero Bias in the Aug issue, I think you are following a wise and proper cou and one in the best interest of amateur radio, by re ing to be a party to splitting the ranks for the sake coddling a vociferous group, many of whom seemir refuse to attempt to understand the reasons for past present developments.

If I sense the current situation correctly, it behoo us all to remind ourselves that we have been given tain privileges by FCC (in the face of very strong c petition from commercial and other sources) and, v these privileges, certain responsibilities to conduct selves and to develop the art in the public interest; further, that, unless we as a group soon begin to dem strate more convincingly that we are performing a ser —giving as well as receiving—our privileges will further restricted. At this time, few things could ac erate such restrictive action by FCC than a divis in amateur ranks. Remember the old adage, "Div and Conquer." So, let's not dwell on what may poss have been mistakes in the past—let's be sure we do right thing in the future.

Karl G. Krech, W
1012 Wilde Avenu
Drexel Hill, Pa.

Editor, *CQ:*

At the risk of boring you with repetitious comm I cannot refrain from telling you what a wonderful you're doing with your editorials! Your calm, fac approach to what could be a controversial issue sho be a guideline for all editors to follow. You have surely added to the respect accorded you and y magazine. Amateur radio needs unity now as n before. If it is to survive the next International Con ence, it will need to prove again its usefulness and tentialities and to present a unified front to all th other services that need and desire our operating quencies.

Carl C. Drumeller, W5E
5824 N.W. 58th Street
Oklahoma City 22, Okla

FIRST and ONLY.. remotely tuned ROTATABLE DIPOLE!

DESIGNED SPECIALLY FOR 40 AND 75 METERS IN LIMITED ANTENNA SPACE

NEW-TRONICS CLIFF-DWELLER™

Housing for motors and gear trains with mounting yoke

Resonance and band switching control

ELECTRICAL FEATURES

- Antenna resonance finger tip controlled from transmitter location in shack.
- VSWR: 1.1 to 1 or less across entire band
- Feed-point variable to compensate for antenna environment
- No traps . . . no baluns . . . no matching devices of any kind
- Feed direct with any length 52 ohm cable
- Power handling capacity — maximum legal limit

The CLIFF-DWELLER is another New-Tronics first. Here's a tuneable dipole ideal for hams who live in apartments or in homes on small lots. The CLIFF DWELLER will give you unbelievable performance even in limited space.

MECHANICAL FEATURES

- Approx. lengths
  - 28′-6″ — 26′ 7.0-7.3 mc
  - 30′-6″ — 26′ 3.5-4.0 mc
  - 31′-4″ — 26′ Two-Bander
- Self supporting, accepts 1¼″ threaded pipe for mounting in standard rotators
- Maximum turning radius approx. 15′-8″
- Sturdy aluminum die cast housing for motors and gear trains which drive end sections of dipole
- Heat treated aircraft type, 1¼″ heavy wall aluminum tubing
- Completely waterproofed resonators and housings

MODEL NO.	FREQ. MC	WEIGHT	NET PRICE
CD 40	7.0-7.3	Under 20 lbs.	$ 92.50
CD 75	3.5-4.0	Under 20 lbs.	99.50
CD 40-75	Two Bander	Under 20 lbs.	129.50

See the CLIFF-DWELLER and other fine NEW-TRONICS products at your distributor or write us for descriptive literature.

NEW-TRONICS CORPORATION

3455 VEGA AVENUE • CLEVELAND 13, OHIO

For further information, check number 15, on page 110

Designed for

Application

No. 92200

TRANSMATCH

Allows a transmitter to work into the 50 ohm unbalanced load for which it was designed. Converts a multi-band antenna to 50 ohms at all amateur frequencies between 3.5 and 29.7 MC. Matches 10 to 500 ohm unbalanced loads. Handles a KW.

JAMES MILLEN MFG. CO., INC.

MAIN OFFICE AND FACTORY

MALDEN

MASSACHUSETTS

Novice Point of View

Editor, *CQ:*

As a Novice I do not have too much of a say in t ARRL "incentive license movement." But, as a licens amateur I will say that I feel that it would be a gre deterrent to amateur radio, and people starting out ham radio.

If the holders of a higher class of license wanted mo privileges, give them the higher frequencies (144 mc u to them alone. Those higher frequencies are suppos to have great promise, so give them to amateurs w could utilize them to the fullest extent.

Jim Brookman, WN4PXP
612 Ellison Avenue
New Smyrna Beach, Flori

More Swans of Abbotsbury

Editor, *CQ:*

After reading the superbly written article by E. M Wagner in the August *CQ* I wish to say bravo! He beautifully points out what I have been thinking for long time. I have often thought about writing an artic on that very subject myself, but I am not so skilled rhetoric as Mr. Wagner so I probably could have nev come up with such a good job.

I wish there were some way that the article could reprinted in vast quantities and distributed to everyo who has anything to do at all with amateur radio. course it would have little effect on those whose intere in amateur radio is chiefly commercial, since the mo 'plug-in appliance' hams we have, the more money th have in their pockets.

One thing though, I read the article and never cou understand why some of your staff were reluctant see it in print, as you stated in the introductory headi of the article. In fact, after reading this article, h could anyone not agree with it wholeheartedly if he intelligent and really interested in amateur radio? Ever one should realize that amateur radio still possesses t inherent ability to attract newcomers of its own acco

Donald Cheser, K4KY
RFD 1
Woodlawn, Tenn.

Editor, *CQ:*

I wish to congratulate the author, Mr. Wagner, f writing, and you for publishing the above article in *C* I agree with the author that amateur radio is rapi approaching a crisis. Also that active encouragem for people to adopt amateur radio as a hobby should discontinued. However, I seriously question how eff tive this would be in reducing the number of new swa I hope that many more amateurs will express their op ions on this provocative article.

J. J. Dobry, M.D., VE6D
604-608 Bamlett Buildin
Calgary, Alberta, Canad

Editor, *CQ:*

I read the article in August *CQ* entitled "The Swa of Abbotsbury" with very much interest. It is und standable why some of your staff were reluctant to pu lish this article. I do admire your courage because I c see that perhaps some of your advertisers may pre to discourage this sort of thing.

Over a period of twenty years I have seen much pu licity to entice new blood into amateur radio. The tre has been to make the dollar the ticket to the airwa rather than genuine interest and proficiency of the te nical art. Those amateurs that are willing to impro their proficiency and contribute something besides QR are the only ones that are worthy of receiving the be fits of the best hobby in the world. I certainly belie that amateur radio continually needs to have new blo but I am with G3BID—why advertise for QRM? Le be more selective in both our advertising and the quirements for amateur privileges.

R. G. McCuistion, W5L
P. O. Box 4943
Midland, Texas

◀ For further information, check number 16, on page 1

NEW Mosley EL TORO antennas

- **THREE MODELS** - Mosley El Toro antennas are available in three models, TW-3X - NS-3 and TW-3X Jr., designed to give outstanding performance. These versatile antennas were developed for the ham with a limited budget, limited space and the traveler working portable.

- **THREE BAND OPERATION** - Mosley TW-3X and TW-3X Jr. antennas operate on 20, 40 & 75/80 meters. Mosley NS-3 (Novice Special) operates on 15, 40 & 80 meters. All Mosley antennas feature pretuned, compact design & excellent broad band characteristics.

- **TWO POWER RATINGS** - Mosley TW-3X has an AM rating of 1000 watts input to the final amplifier and a CW/SSB rating of 2000 watts P.E.P. Mosley TW-3X Jr. and NS-3 (Novice Special) have ratings of 300 watts on AM & 1000 watts input to the final amplifier on CW and SSB.

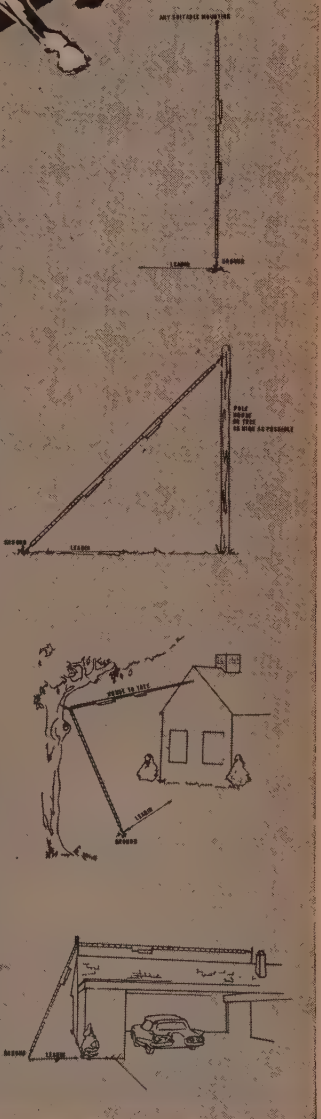

Mosley El Toro antennas are trap type grounded quarter wave antennas using a unique method of tuning and a single 52 ohm coax line. Antenna is 58 ft. long and can be mounted to fit most any location. No radials are needed when mounted at ground level. Antennas come pretuned, in kit form and can be easily adjusted to resonate at any portion of the rated bands.

Mosley Electronics, Inc.

4610 N. LINDBERGH BLVD., BRIDGETON, MISSOURI

63044

For further information, check number 17, on page 110

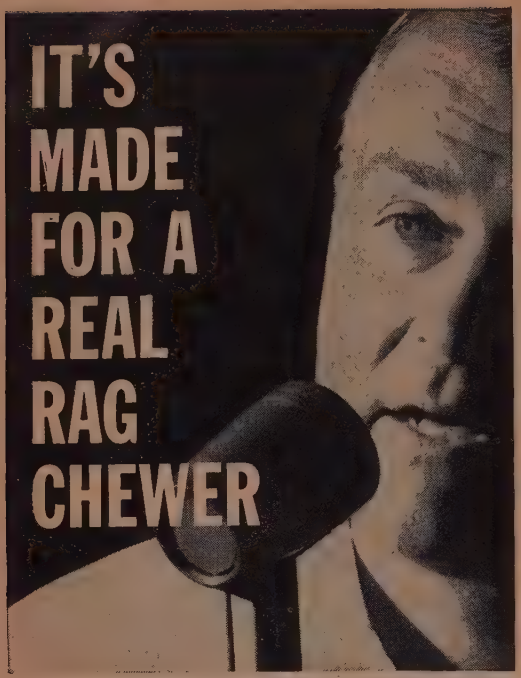

At last! A quality microphone designed *specifically* for the ham. Features galore that hams have asked for. Tops in voice punch, intelligibility. Unique convenience features to minimize operator fatigue. Great for AM & FM, unsurpassed for SSB. • "Shaped" response—cuts off sharply above 3000, below 300 cps with rising characteristic to curve: gets message through with top audio punch! • Push-to-talk bar-switch with optional locking feature to control relay and mike muting circuits. • Separate slide-switch gives choice of press-to-talk or VOX operation. • Exclusive adjustable height stand. • Rugged Shure Controlled Magnetic element (U.S. Patent 2,454,425). • Field replaceable cartridge and cable. • ARMO-DUR case and stand—can't rust, peel, crack, or dent. Write for data sheets!

SHURE BROTHERS, INC.
222 Hartrey Ave., Evanston, Illinois

ADJUSTABLE HEIGHT

ALL NEW
SHURE
444
HAM MICROPHONE
only $25.50 amateur net

For further information, check number 35, on page 110

Don't Forget 160

Editor, *CQ:*

Re: August Zero Bias, you forgot(?) to mention clas B & C privileges on the 1750-2000 kc 160 meter band The omission sadly distorts the content. 160 was "th band" for most class B & C hams on phone. I am i favor of incentive licensing.

S. P. (Ted) Wilds, W4GVI
P. O. Box 323
Aiken, S. C.

Jealousy?

Editor, *CQ:*

Please stop publishing articles about ten year old girl who have General (and Conditional) licenses (July *CQ* p. 71). Each such article sets me back six weeks in m study for my General!

Warren S. Kirkland, WN6BU
523rd A.F. Band
March AFB, Calif.

Inter-Class Friction

Editor, *CQ:*

Re: Letter of K1UZV, page 10, August issue.

Got a kick out of this letter. It is a very good exam ple of what creates friction between the amateurs. Th Tech grade 'lids' are tested by the so-called 'elite' clas amateurs.

It has been my experience that much more courtes and friendliness has been shown on bands where lowe grades are operating. Perhaps this is why there is such rapid growth among their ranks.

If it will be remembered, the biggest difference be tween the Tech. and Class A (General) amateur licens is the code test, theory being approximately the same Some Tech's have lots of electronic experience and hav had more experience with TVI than some of your so called elite Class A amateurs.

Anytime someone calls a class of licensed hams lids it seems to me this is just trying to cause friction. I won der what it takes for an operator to set himself up s high above everyone else?

Herman Entz, K7PA
1314 Second Street
Kirkland, Washington

P.S. I'm a General Class Licensee who doesn't fe 'elite'.

When Hams Were Hams

Editor, *CQ:*

Before I blast off I would like to say that I have bee an amateur radio operator for years and years, eve back in the beginning of ham radio, in the spark ga days, the days of rotary spark gaps, stationary spar gaps, ear-phones, cats whiskers, and finally, the Audio tube and the Neutrodyne receiver. These were cruc receivers but they were the best in those days. It took good operator to tune in a station and usually two o three dials and the adjustment of the regeneration co trol. We had no Will-O-The-Wisp, Extra class. Advance class, General class, Conditionals or Novice class boy We were just plain old amateurs, no one seemed to wa to esteem himself above another fellow amateur. If yo needed help you could always feel free to ask anoth ham for it. Today that all seems different, it is dog e dog.

In my school days, each term we had in our class, smart Alex, a know it all. Today we have the same thi in ham radio. Some of them are just a smidgen bett on code or perhaps on some theory and they get the b head. They never have had to build their own equi ment. They rely wholly upon the manufacturing co panies. Some of them can't even solder a joint! Yet th claim that they are the real amateurs!

Real amateurs are the ones that made ham radio, th dug it out of the wilderness. They had the knowledg the inventive experience, to test and to try, and to e The real amateurs were weeded out from the boys, t book worms. It was build, build, and that is where were made amateurs, because we were not bigots w had to rely on what the real amateurs had alrea discovered.

st Choice Among Nation's Amateurs!

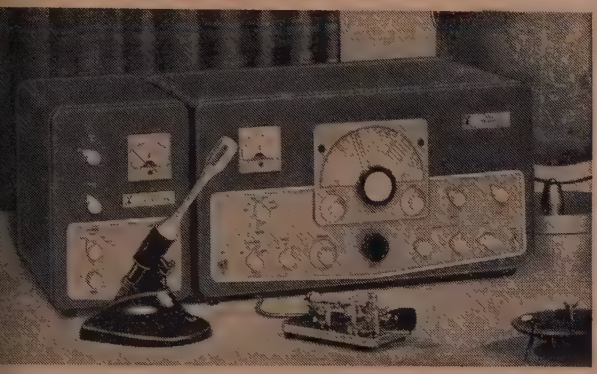

Matched Pair

Outstanding performance on SSB, AM and CW with absolutely no compromise on any mode!

SSB ADAPTER"—The new filter-type SSB generator—th bandswitching 80 through 10 meters . . . more than) db sideband suppression . . . more than 45 db carrier ppression! When used with the Viking "Valiant" or 'aliant II" it places 275 watts P.E.P. at your command. vo compact units and interconnecting cables . . . RF it is only 8" wide—may be placed on your operating esk. Power supply unit may be placed in any convenient cation. Features built-in multiplier requiring VFO input ly—band-pass interstage couplers require no tuning—sign and front panel make operating practically fool-oof. Superb audio fidelity and balanced audio response; cellent sideband, spurious and carrier suppression. her features: positive VOX and anti-trip circuits with ilt-in anti-trip matching transformer and adjustable OX time delay. With remote power supply, tubes and ystal filter, less microphone.

t. No. 240-305-2—Wired, tested.....Net $369.50

VADER—More exclusive features than any other Trans-tter/Exciter on the market today! Specially developed gh frequency, symmetrical, multi-section band-pass ystal filter for more than 60 db sideband suppression—ore than 55 db carrier suppression! Instant bandswitch-g 80 through 10 meters—no extra crystals to buy—no aligning necessary. Delivers a solid 200 watts CW in-t; 200 watts P.E.P. SSB input; 90 watts input on AM! 5-30 watts output—upper sideband and carrier). Built-VFO—exclusive RF controlled audio AGC and ALC miter type) provide greater average speech VOX and ti-trip circuits. Fully TVI suppressed. Self-contained eavy-duty power supply. With tubes and crystals.

t. No. 240-302-2 Wired, tested.....Net $619.50

VADER 2000—Here are all of the fine features of the nvader", plus the added power and flexibility of an tegral linear amplifier and remote controlled power pply. Rated at a solid 2000 watts P.E.P. SSB, 1000 tts CW, and 800 watts AM! (250 to 300 watts output—per sideband and carrier.) Wide range output circuit 0 to 600 ohms adjustable). Final amplifier provides ceptionally uniform "Q". Exclusive "push-pull" cooling stem. Heavy-duty multi-section power supply. With wer supply, tubes and crystals.

t. No. 240-304-2 Wired, tested.....Net $1229.00

GH POWER CONVERSION—Take the features and per-rmance of your "Invader" . . . add the power and xibility of this unique Viking "Hi-Power Conversion" stem . . . and you're "on the air" with the "Invader 000". Wired, tested, includes everything you need—no ldering necessary—complete conversion in one evening.

t. No. 240-303-2.....Net $619.50

"VALIANT II"—Outstanding flexibility and performance—bandswitching 160 through 10 meters—delivers 275 watts input CW or SSB (with auxiliary SSB exciter or Viking SSB adapter) and 200 watts AM! Low level audio clipping—differentially temperature compensated VFO provides stability necessary for SSB operation! High efficiency pi-network tank circuit—final tank coil silver-plated. Other features: TVI suppression; time sequence (grid block) keying; high gain push-to-talk audio built-in low pass audio filter; self-contained power supply; and single control mode switching. As an exciter drives any popular kilowatt level tubes and provides quality speech driver system for high power modulators. Provision for plug-in SSB operation with no internal modification. With tubes, less crystals.

Cat. No. 240-105-1—Kit.....Net $375.00
Cat. No. 240-105-2—Wired, tested.....Net $495.00

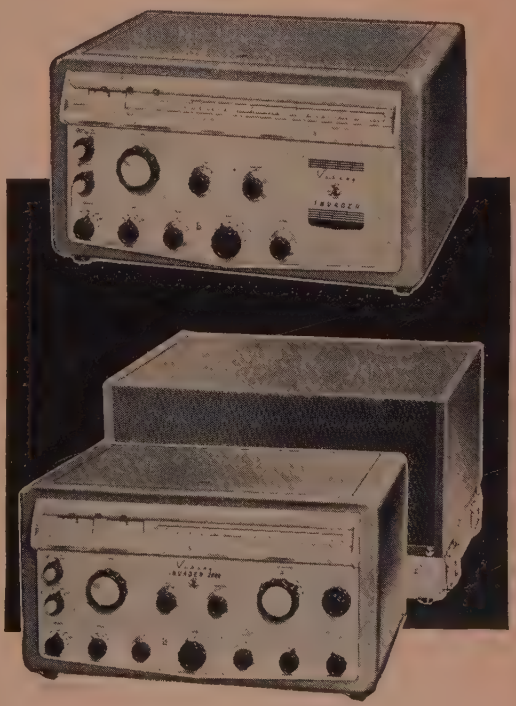

E. F. JOHNSON COMPANY
WASECA, MINNESOTA, U.S.A.

®

For further information, check number 31, on page 110

Communications, mobile radio...

A First Class FCC License

...or Your Money Back!

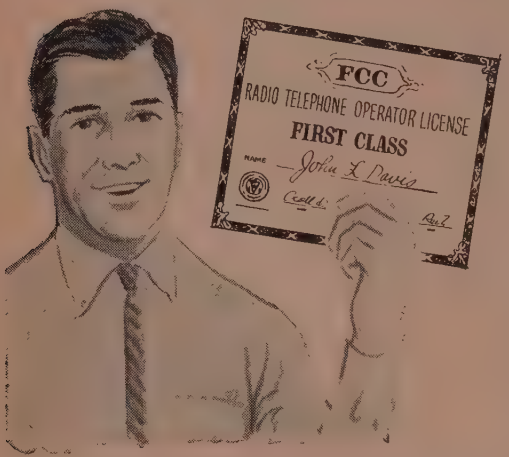

Your key to future success in electronics is a First-Class FCC License. It will permit you to operate and maintain transmitting equipment used in aviation, broadcasting, marine, microwave, mobile communications, or Citizens-Band. Cleveland Institute home study is the ideal way to get your FCC License. Here's why:

Our training programs will *quickly* prepare you for a First-Class Commercial Radio Telephone License with a Radar Endorsement. Should you fail to pass the FCC examination after completing your course, you will get a *full refund* of all tuition payments. You get an FCC License . . . or your money back!

You owe it to yourself, your family, your future to get the complete details on our "proven effective" Cleveland Institute home study. Just send the coupon below TODAY. There's no obligation.

MAIL COUPON TODAY FOR FREE CATALOG

Cleveland Institute of Electronics

1776 E. 17th St., Dept. CQ-6
Cleveland 14, Ohio

Please send FREE Career Information prepared to help me get ahead in Electronics, without further obligation.



CHECK AREA OF MOST INTEREST –

- ☐ Electronics Technology
- ☐ Industrial Electronics
- ☐ Broadcast Engineering
- ☐ First-Class FCC License
- ☐ Electronic Communications
- ☐ _____ other

Your present occupation _____

Name _____ Age ____
(please print)

Address _____

City _____ Zone ____ State _____

Accredited Member National Home Study Council

I am for making all Advanced, Extra, Conditio and Novice class licensees build their own equipm and operate it before he is permitted to have a per nent license that he can renew. Ham radio used to *in*ventive, now it is *pre*ventive. No hams, no amateur all manufactures and Citizen banders, every Tom, D and Harry with a license, working DX and carrying a lot of hogwash.

U. D. Bryant, K4QJJ, ex-3UV, W3F
404 Sycamore Street
Corbin, Kentucky



Amateur Radio on Display at the 196 National Electronics Conference

The Chicago Area Radio Club Council will present a complete operating amateur radio single sideband, and radio teleprinter station at the 1963 National Electronics Conferenc to be held October 28 thru 30 at the Chicago Lakefront Exhibition Hall, McCormick Place. The station will be set up and operated by radio amateu of the Chicago area from the Ladies Amateur Radio Klub, (LARK) and the Illiana Teleprinter Society (ITS). An added feature of the amateur radi display will be the first time showi of a device to transform punched printer tape into embossed Braille material for the blind. This is the invention of Mr. Ray Morrison W9GR an active teleprinter enthusiast. Mr. Morrison has been at work on thi device for several years, and will al give a talk and demonstration of th new machine during the annual "Chi RTTY" meeting on Sunday, October 2 at McCormick Place. This meeting i sponsored by the Chicago Area Tele printer Society (CATS), a group of radio amateurs interested in commu cations via teleprinters.

The display will be under the direct of Eve Cudia, K9EMS of the LARKS and Bill Soich, W9HXW of the ITS.

QCWA Dinner-Meeting

The 16th annual Dinner/Meeting of the Quarter tury Wireless Association will be held Friday, Oct at the Hotel Shelburne in New York City. The Din Meeting will begin at 6 P.M. with cocktails. Mr. Louckes, W3GD of the FCC will be guest speaker. ner reservations may be made by writing QCWA P dent W2FX, 155 Bay View Road, Plandome Ma N. Y.

Correction

"A 10 Meter Mobile Converter," page 23, Aug. should show *one* section of switch S_1 in the opp position. Several readers were kind enough to point out.

start right stay right with HEATHKIT

Here's the low cost, high quality set-up you need to begin your new hobby of Amateur Radio . . .

-10 RECEIVER

overs 80 through 10 meters • Tunes , AM & CW signals • Prebuilt, ligned tuning assembly • RF stage xtra sensitivity • Lattice-type crys- lter for high selectivity

deal novice receiver! Easy to build preassembled, aligned tuning unit, precut, cabled wiring harness! Ver- e controls, large slide-rule dial, -in "S" meter for easy tuning, built- FO for SSB & CW reception and a of other high performance features elight any amateur radio fan! Fea- amateur band coverage only for mum accuracy and stability. Pro- n for plug-in 100 kc crystal calibra- 7-tube superheterodyne circuit. A ct style & performance mate to the 60 Phone & CW Transmitter!

IR-10...20 lbs....$8 mo... **$79.95**

HRA-10-1, Plug-in 100 kc stal calibrator. 1 lb..... **$8.95**

HG-10 VFO

• 80 through 2 meters coverage • Plugs into DX-60 for general class operation • A tremendous savings over crystals for similar coverage

This high quality Heathkit VFO requires only plug-in connection to the DX-60 Transmitter to tune any frequency, any band for complete amateur coverage. Beautifully designed throughout for years of top-notch performance & high stability. 12 lbs.

Kit HG-10 $5 mo.... **$34.95**

DX-60 TRANSMITTER

• 90-watts phone or CW on 80 through 10 meters • Neutralized 6146 final amplifier • Built-in low pass filter • Operates at reduced power for novice operation

An exceptionally fine transmitter for the novice! Provides CW operation at the novice power limit and AM operation later as a general class license holder. Clean, rugged construction, high quality components, and easy to follow instructions make assembly an easy, fun-filled task. Controlled-carrier modulator and power supply are built-in. Single-knob bandswitching and Pi-network (coaxial) output provide for complete operating convenience. Panel meter monitors final grid or plate current for easy tuning. Less crystals.

Kit DX-60...24 lbs.... $8 mo..... **$79.95**

WANT CW ONLY? . . . USE THE HX-11

Specially designed for CW work! Efficient circuitry provides 50-watt plate power input for outstanding amateur communications. Covers 80 through 10 meters. Features built-in low pass filter, neutralized final amplifier, switched antenna relay power, pi-network output coupling and panel meter. Husky built-in power supply. Single knob bandswitching.

Kit HX-11...18 lbs....$5 mo..... **$43.50**

FREE 1964 CATALOG

Fully illustrates over 250 different Heathkits at money-saving do-it-yourself prices. Choose from a complete line of "mobile" or "fixed" station amateur gear and accessories at savings of 50% or more!

HEATHKIT® by Daystrom

HEATH COMPANY, Benton Harbor 12, Mich. 49023

☐ Please send free 1964 Heathkit catalog.

☐ Enclosed is $_____, plus postage send_____.

NAME_____
(please print)

ADDRESS_____

CITY_____ZONE_____STATE_____

For further information, check number 21, on page 110

TURNER
MICROPHONES . . . BEST FOR MOBILE AND BASE

MODEL 350C

GOING . . .

Convenient, top-performing, low-priced Model 350C from Turner. Rugged, dependable mobile mike . . . world's most popular. Why pay more . . . only $16.80 list . . . buy the Turner 350C. Response: 80-7000 cps. Level: —54 db.



MODEL 254X

OR SITTING STILL . . .

A low-cost crystal microphone with on-off push-to-talk and lock switch. A perfect mike for the ham shack. Cable is 7 foot, three conductor (one shielded), wired for relay operation. Response: 80-7000 cps. Level: —48 db. List price $23.50.

SEE YOUR DEALER OR WRITE FOR COMPLETE SPECIFICATIONS

THE TURNER MICROPHONE COMPANY
925 17th Street N.E.,
Cedar Rapids, Iowa

IN CANADA:
Tri-Tel Associates, Ltd.,
81 Sheppard Avenue West,
Willowdale, Ontario

For further information, check number 22, on page 110

QSL contes



WINNER this month is VE3FKL who uses the "cod scheme in a colorful 3½" by 8" card. George us a buff colored card printed in red, green, wh and two shades of blue to produce a striking effe Runners up are headed by an s.w.l., Martin Rusti DL9286 whose card features "Stuttgart at night." OX3J DJ5MX and K4BYN fill out the runners-up departme

Runners Up



"Are you the POLY-COMM 6 TRANSCEIVER too?"

Do you have a dual nuvistor rf amplifier?

Do you have a MINILOAD VFO with an adjustable differential capacitor?

Do you have an ultra sensitive squelch and noise limiter and illuminated S meter?

But I have a microphone and mounting bracket included in my price.

I sell for $329.50 and there is no extra charge for C.D. units.

We make a pretty good team in any ham shack.

See you on the dealer's shelf, you rascal you!

"No I'm the POLY-COMM 2 TRANSCEIVER (that's T-W-O)!"

Of course . . . and I've got the same unparalleled sensitivity as you. (.1 μv at 6 db S/N)

Sure do . . . and it maintains virtually zero drift under any and all adverse conditions.

Yes, and I even have 17 tubes and 10 diodes.

So do I and I have 3 more nuvistors to really take advantage of low noise on two meters.

I sell for $349.50 even though I have more tubes, and no extra charge for C.D. units.

The best ! ! ! and don't forget the D.C. supply is built-in for mobile.

I'll be there and I'm not a rascal.

APPROVED

APPROVED

Write for free descriptive brochure.

POLYTRONICS LABORATORIES, INC.

88 Clinton Road • West Caldwell, New Jersey, 07007

EXPERIMENTER, SWL or RADIO AMATEUR

Select your receiver, transmitter, or VFO from easy-to-build International A O C kits.

Simple step-by-step instructions show you how to assemble factory prewired units. Designed for top performance at a low cost!

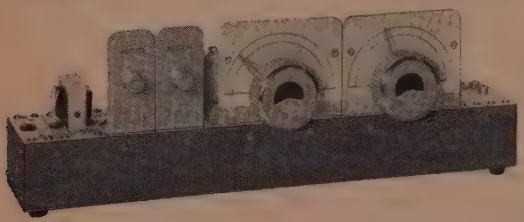

RECEIVER KITS

This new line of International receiver kits cover a wide range of amateur, citizens band and special frequencies. Designed for AM, CW, or SSB reception, this basic receiver using a superheterodyne circuit* with regenerative second detector may be expanded to a more elaborate receiver by the addition of other Add-On-Circuits. Sensitivity usable to below 10 microvolts for voice and 1 microvolt for code. Nuvistor rf amplifier, mixer, oscillator, I.F. transformer, detector/1st audio, and power audio amplifier. Tube lineup: 6DS4 nuvistor, 6BE6, 6U8, 6AQ5. Shipping weight: 15 lbs.



Receiver kit includes 4" speaker and power supply.

Kit	Frequency	Price
AOR-40	Special	$69.00
AOR-41	150 kc — 450 kc	62.50
AOR-42	2 mc — 6 mc	62.50
AOR-43	6 mc — 18 mc	62.50
AOR-44	80 meter/40 meter	62.50
AOR-45	15 meter/10 meter	62.50
AOR-46	6 meter	66.50
AOR-47	2 meter	66.50
AOR-48	Citizens 27 mc	62.50

*AOR-41 uses a tuned rf circuit with 6BA6

TRANSMITTER KIT

A compact package delivering a plate input of 50 watts for CW operation on 80 or 40 meters. 12BY7 crystal oscillator—6DQ6 power amplifier. Pi-network final. When used with AOR-44 receiver, transmitter operates from receiver power supply. Meter and TR switch.

AOT-50 transmitter kit less power supply and key, but with one 40 meter novice band crystal. Shipping weight: 5 lbs. $35.00

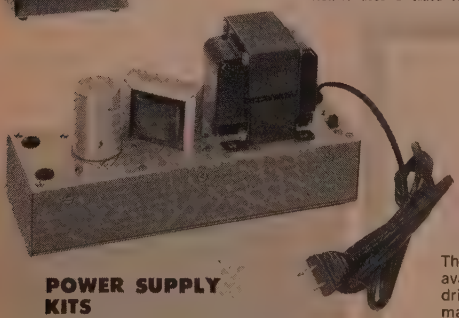

POWER SUPPLY KITS

AOP-100 350 volts, 150 ma intermittent or 100 ma continuous service, 6.3 volts @ 5 amps. Shipping weight: 8 lbs. $18.50

AOP-200 650 volts, 250 ma intermittent or 200 ma continuous service, 6.3 volts @ 10 amps. Shipping weight: 10 lbs. $32.50



VFO KITS

The International AOF series of variable frequency oscillator kits is available in three versions. For example, the AOF-91 kit is a complete driver unit to be used with 6 meter and 2 meter transmitters. Approximately .5 watt of power is available on both bands. Tube lineup: 6BH6 oscillator, OB-2 voltage regulator, 12BY7 buffer-amplifier/multiplier. Shipping weight: 5 lbs.

Kit	Frequency	Price
AOF-89	VFO 8 mc — 9 mc and buffer	$22.00
AOF-90	VFO 8 mc — 9 mc plus buffer multiplier and 6 meter output	29.00
AOF-91	VFO 8 mc — 9 mc plus buffer multiplier, 6 meter/2 meter output	36.00

INTERNATIONAL CRYSTAL MFG. CO., INC.
18 NORTH LEE, OKLAHOMA CITY, OKLAHOMA

Please ship _____

I enclose $_____ Send free catalog _____

Name _____
(print)

Address _____

City _____ Zone _____ State _____

Include sufficient remittance to cover postage. See shipping weight.

For further information, check number 24, on page 110

GUARANTEED!

THE BARKER & WILLIAMSON MODEL 6100 TRANSMITTER IS SO FAR AHEAD OF OUR TIME IN DESIGN, PRINCIPLES AND ENGINEERING, THAT WE CAN OFFER A GUARANTEED LIST OF FEATURES . . .

Barker & Williamson Guarantees that NO other Amateur Transmitter on the Market today offers ALL these features:

• Crystal controlled synthesizer, frequency continuously variable • No free-running oscillators • Direct frequency read-out (no interpolation) • Frequency resetability approaches a frequency meter • Crystal stability on all frequencies of every band • Sideband selection by crystal filter • MARS frequency coverage • Sideband and carrier suppression down 50 DB • Distortion products down 40 DB • 180 watts PEP input • SSB, CW, AM • Pi-network loading control • Dual ALC, and many others

YOU CAN OWN AND OPERATE TOMORROWS TRANSMITTER TODAY! for only $875.00

Barker & Williamson, Inc.

BRISTOL PENNSYLVANIA • Telephone 215-788-5581

OCTOBER 1963

See your local B&W Distributor or write for colorful brochure.

For further information, check number 25, on page 110

ASTATIC HAS THE RIGHT MIKE FOR YOUR NEEDS

the
ASTATIC
CERAMIC OR DYNAMIC
MOBILE
MICROPHONES

DESIGNED FOR THE CITIZEN OR HAM ON THE MOVE

ASTATIC MODEL 511 CERAMIC and 513H DYNAMIC were human engineered to give flexibility of operation. SWITCH MAY BE OPERATED WITH EITHER HAND. When it comes to mounting to equipment or instrument panel, ASTATIC HAS THE ULTIMATE IN MOUNTING BRACKETS. Microphone may be mounted in ANY position. SNAP-IN action even allows mounting in INVERTED positions. These light weight microphones with greater talk power and rising response characteristic also make IDEAL SSB MIKES for IMPROVED CLARITY OF SPEECH.

Ask your distributor for complete literature or write us today.

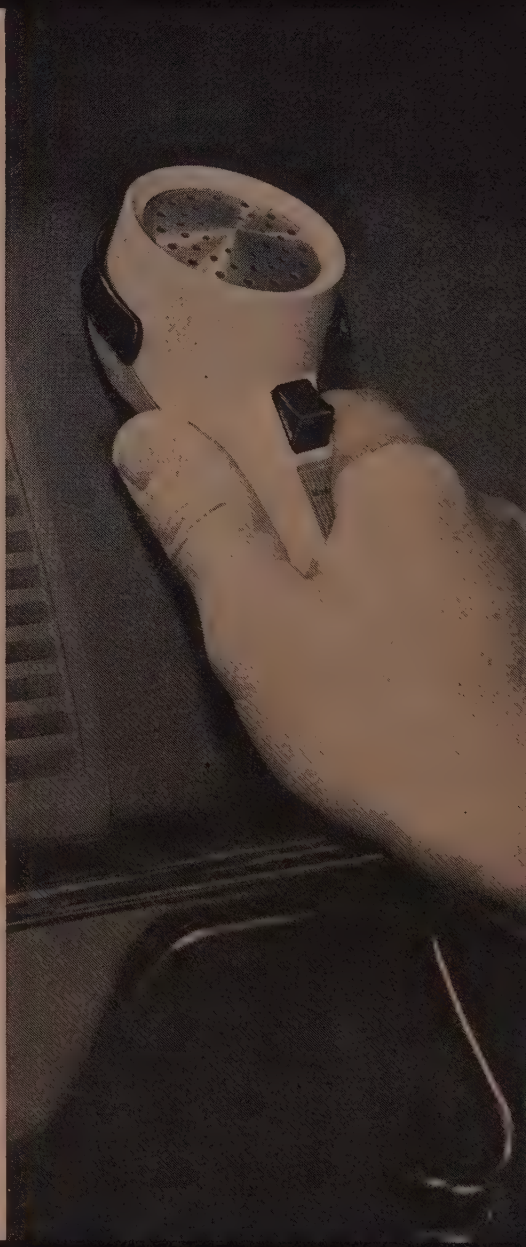

ASTATIC CORPORATION
CONNEAUT, OHIO 44030 • U.S.A.
In Canada: Canadian Astatic Ltd., Toronto, Ontario
Export Sales: Roburn Agencies, Inc., 431 Greenwich Street, New York 13, N.Y., U.S.A.

For further information, check number 26, on page 110

n announcement f significance o all amateur adio operators

The Heath Company takes pleasure in introducing on the following pages, the first of a complete series of fully integrated SSB amateur radio equipment that will set new standards for value, quality, style, and performance. To be designated the Heathkit SB Series, these products represent a major step forward in amateur radio SSB equipment. Now, the best in SSB design features are combined with Heathkit's leadership in electronic kit techniques to bring maximum performance and operating convenience to amateurs at modest prices.

What design features are essential or desirable for the best SSB performance? Some of the more important ones are high mechanical and electrical frequency stability achieved only by employing crystal-controlled heterodyne circuitry with low frequency variable frequency oscillators, optimum receiver selectivity and minimum transmitted signal bandwidth obtainable by means of the excellent shape factors exhibited only by crystal or mechanical filters, linear tuning with 1 kc dial calibration, smooth anti-backlash dial, automatic level control, small size, and light weight. The SB Series has all these plus the several improved and unique features listed below.

To provide even better performance plus maximum ease of assembly, these new Heathkit SSB products also feature linear dials providing 500 kc frequency coverage per bandswitch position while maintaining 1 kc calibration marks spaced approximately ⅛" apart, a high frequency bandpass IF (8.4—8.9 mc) for improved image rejection and suppression of spurious responses, preassembled and prealigned LMO (linear master oscillator), circuit boards and wiring harnesses, plus specially tooled cabinet, knobs, dial mechanism, and LMO components. When the transmitter and receiver are operated in the transceive mode, in addition to the usual practice of employing a common VFO and high frequency oscillator, the receiver BFO is used as the transmitter carrier oscillator to prevent even minute frequency changes between transmit and receive due to crystal tolerances. This attention to detail is typical of the careful, thorough engineering behind the Heath SB Series.

Only Heathkit experience and know-how can provide the engineering and manual skills necessary to bring such quality and performance to kit-form SSB equipment. Despite this background, Heath engineers spent over two years in the design of the equipment, and the developing and specifying of the critical components (such as the LMO, crystal filters, and dial mechanism). Only the most capable manufacturers have been selected to supply the special components and, as always, only the highest quality parts are employed throughout.

Carefully read the features and specifications of the SB-300 SSB Receiver described on the next two pages. The entire SB Series will exhibit all these fine performance characteristics using the same basic critical components in equipment covering all amateur interests.

HEATH COMPANY
Benton Harbor, Michigan

HEATHKIT® by Daystrom

the deluxe HEATHKIT® SB-300 SSB RECEIVER

$264.95

deluxe features for finest performance



Precision-built Linear Master Oscillator (LMO) is completely assembled and calibrated, ready to install; specially designed dial assures accurate readout and smooth frequency control.

Prebuilt, hermetically-sealed 2.1 kc crys pass filter for SSB provides the excellen shape-factor of 2:1 (60/6 db). Optional AM filters shown installed.



Two heavy-duty 3/32" circuit boards and pre-cut, cabled wiring harness maintain a clean, uncluttered layout for fast, easy assembly, years of faithful performance.

All adjustments are conveniently made from the top of the chassis; chassis screening clearly identifies coil and tube locations, etc. Entire top of ventilated cabinet opens for easy access.

SB-300 features

- Complete coverage of 80 through 10 meter amateur bands with all crystals furnished, plus provision for VHF converters
- Crystal-controlled front-end for same tuning rate on all bands
- 1 kc dial calibrations—100 kc per dial revolution provides band spread equal to 10 feet per megacycle—tuning knob to dial ratio approx. 4:1
- Provision for transceive operation with matching SB-400 Transmitter (available soon)
- Prebuilt linear master oscillator (LMO), wiring harness and two heavy-duty circuit boards for fast, easy assembly
- Professional styling and features throughout for finest HF and VHF amateur band communications

ienced amateurs will especially appreciate the careful attention to detail behind the design of the SB-300. any features include a crystal controlled front-end that provides the same tuning rate on all bands, a pre-Linear Master Oscillator (LMO) for linear tuning with 1 kc dial calibrations, built-in crystal calibrator and c crystal-lattice bandpass filter, a smooth, non-backlash vernier dial drive mechanism, and a beautifully cabinet and panel. Cabinet top opens completely for easy access to top chassis components. Optional AM CW filters are low-cost and easily installed, their steep-sided bandpass eliminates, not merely attenuates, ent interfering signals for exceptional reception.

t features include a high frequency I.F. for maximum I.F. and image rejection, audio inverse feedback, ow-off AGC control, stability of 100 cps after warmup, and a host of other deluxe features that assure communications results. Order your SB-300 now for 60% savings over comparable factory-built receivers! tching Transmitter, 1 KW Linear Amplifier, and an All-Band SSB Transceiver will be available soon!

B-300....17 lbs.....no money dn., $25 mo..... **$264.95**
300-1 CW Crystal Filter (400 cps)....1 lb..... **$ 19.95**
300-2 AM Crystal Filter (3.75 kc)....1 lb..... **$ 19.95**

the superb specifications below and see what mendous dollar value the SB-300 represents!

cy Range (megacycles): 3.5 to 4.0, 7.0 to 7.5, 14.0 to 14.5, 21.0 to 21.5, 28.0 to to 29.0, 29.0 to 29.5, 29.5 to 30. **Intermediate frequency:** 3.395 megacycles. **cy stability:** 100 cps after warmup. **Visual dial accuracy:** Within 200 cps on . **Electrical dial accuracy:** Within 400 cps on all bands. **Backlash:** No more ps. **Sensitivity:** Less than 1 microvolt for 15 db signal plus noise-to-noise SSB operation. **Modes of operation:** Switch selected: LSB, USB, CW, AM. **ity:** SSB: 2.1 kc at 6 db down, 5.0 kc at 60 db down (crystal filter supplied). AM: 6 db down, 10 kc at 60 db down (crystal filter available as accessory). CW: 400 b down, 2.5 kc at 60 db down (crystal filter available as accessory). **Spurious :** Image and IF rejection better than 50 db. Internal spurious signals below t antenna input of 1 microvolt. **Audio response:** SSB: 350 to 2450 cps nominal AM: 200 to 3500 cps nominal at 6 db. CW: 800 to 1200 cps nominal at 6 db. **input impedance:** 50 ohms nominal. **Muting:** Open external ground at Mute **rystal calibrator:** 100 kc crystal. **Front panel controls:** Main tuning dial; switch; mode switch; AGC switch; band switch; AF gain control; RF gain con-elector; phone jack. **Rear apron connections:** Accessory power plug; HF VHF #1 antenna; VHF #2 antenna; mute; spare; anti-trip; 500 ohm; 8 ohm line cord socket; heterodyne oscillator output; LMO output; BFO output; VHF switch. **Tube complement:** (1) 6BZ6 RF amplifier; (1) 6AU6 First mixer; Heterodyne oscillator; (1) 6AU6 LM osc.; (1) 6AU6 second mixer; (2) 6BA6 er; (1) 6AU6 Crystal calibrator; (1) 6HF8 1st audio, audio output; (1) 6AS11 detector, BFO, BFO amplifier. **Power supply:** Transformer operated with iode rectifiers. **Power requirements:** 120 volts AC, 50/60 cps, 50 watts. **ons:** 14-7/8" W x 6-5/8" H x 13-3/8" D.

WATCH FOR THESE NEW HEATHKIT RELEASES!

SB-100 ALL-BAND SSB TRANSCEIVER



SB-200 1 KW LINEAR AMPLIFIER

SB-400 SSB TRANSMITTER

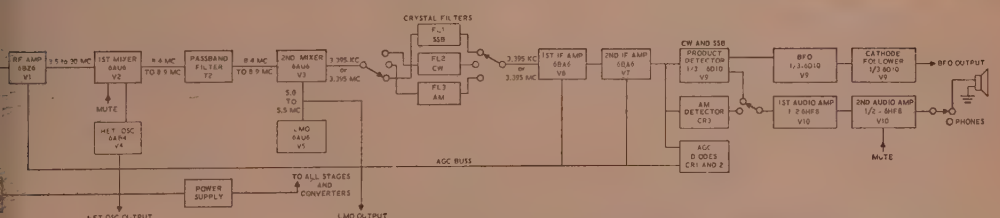

HEATHKIT® by Daystrom

NEW! FREE 1964 HEATHKIT CATALOG

See the latest new products in Heathkit's wide, wonderful line. Over 250 do-it-yourself kits for stereo/hi-fi, marine, TV, electronic organ, amateur radio, test instruments, educational, home and hobby that will save you up to 50%. Send for your free copy today!

HEATH COMPANY, Benton Harbor 12, Michigan 49023

☐ Please send FREE copy of New 1964 Catalog
☐ Please send SB-300 Specification Sheet
☐ Enclosed is $_____, please send Model _____

Name _____

Address _____

City _____ State _____ Zip Code _____

For further information, check number 29, on page 110

A 2 KW P.E.P. Linear Amplifier

BY M. D. SMITH*, WA4DXP

Here is a linear amplifier that is basic in design. Using swamped grid input, it requires 100 to 150 watts of drive and loafs along at 1 kw input. This table top linear is flexibly metered and has a series of safety controls to prevent accidental damage (to linear or operator).

THE following linear amplifier for 80-10 meter operation was designed over a period of seven months. During this time, numerous other circuits were investigated to determine their most outstanding features. The features from past amplifiers, new ideas, and standard amplifier practice were combined in a linear that would satisfy the following basic requirements:

1. The amplifier had to deliver 2 kw p.e.p. as well as 1 kw c.w. and almost 1 kw a.m.
2. The unit must be rugged, simple in basic design and easy to build.
3. It had to be easy to put into operation, that is, very little adjustment after construction such as neutralization.
4. Designed along commercial broadcast lines in preserving components and insuring foolproof operation.
5. Finally, it had to be compact and neat for desk-top operation.

The completed unit meets the above requirements in that it is one of the most stable, easily adjusted, and rugged linears available. It compares favorably with others costing three to four times as much.

It uses a pair of Amperex 4-400A tetrodes in swamped grid which requires no input tuning. The amplifier will require an exciter that is in the 100 to 150 watt power range.

In actual operation, the linearity, checked with a Heath HO-10 monitor scope, is excellent. With both of the 4-400A's in operation, it's actually hard to hold it down to 1,000 watts c.w.

*Smith Broadcasting, POB 7372-A, Birmingham 13, Alabama.

Circuit Details

Amplifier—The heart of the linear is the pa of 4-400A tubes. The heavily swamped gr combined with ample parasitic chokes mak this linear one that just won't "take off" with th first application of r.f. Many commercial broa cast transmitters use a pair of 4-400A's wi nearly 2,000 watts of d.c. input.

Input Circuit—The advantage of the swamp grid is that it is easy to build, requires no tuni on any band and allows tuning of the exciter full output using the non-reactive resistor as dummy load. The voltage developed from th current in the 100 ohm resistor is coupl through the 0.001 mica transmitting capacit to the grids of the 4-400A's as shown in fig. 1.

Output Circuit—The output is coupled throu two 500 mmf, 30 kv "TV Doorknob" capacito to the B&W Model 850A Pi-Network inducto The tuning capacitor is a dual section (100 mm per section) with the second section placed the circuit manually for 80 meter operation b switch S_1. The 1500 mmf loading capacitor ca be any type. (The author used a surplus broa cast variable available from Fair Radio.[1] It bea the part number 3D9400 and costs $1.95. Th is a five section job and each section is rat 20-402 mmf.)

A standard relative power output circuit included in the main schematic, but it can omitted if desired. Note that the 10 mh safe choke is *not* a part of the relative output circu The safety choke lowers the voltage on the tu ing capacitor plates and provides a d.c. dischar

[1]2133 Elida Road, Lima, Ohio.

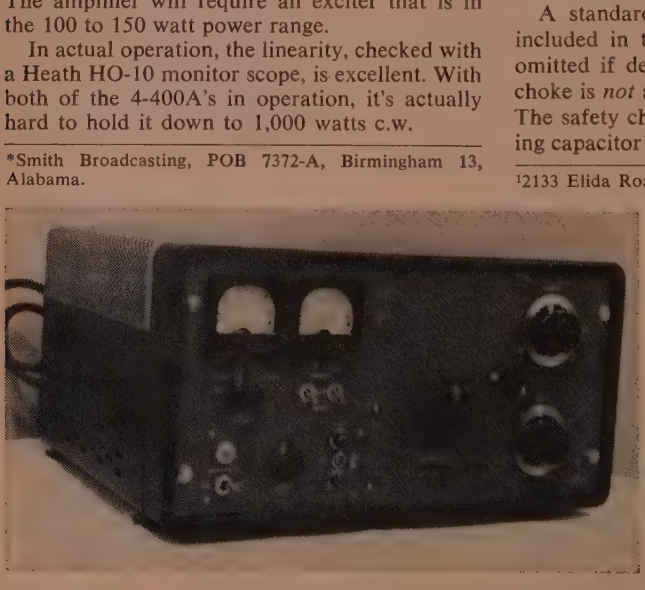

Front view of the 2 kw p.e.p. ta top linear complete in its cabi The output tuning controls are on right side of the linear. The left kn is the bandswitch, the upper d loading and the lower dial, pl tuning. The switch, S_1, between two dials adds the second section the plate capacitor to enable tun 80 meters.

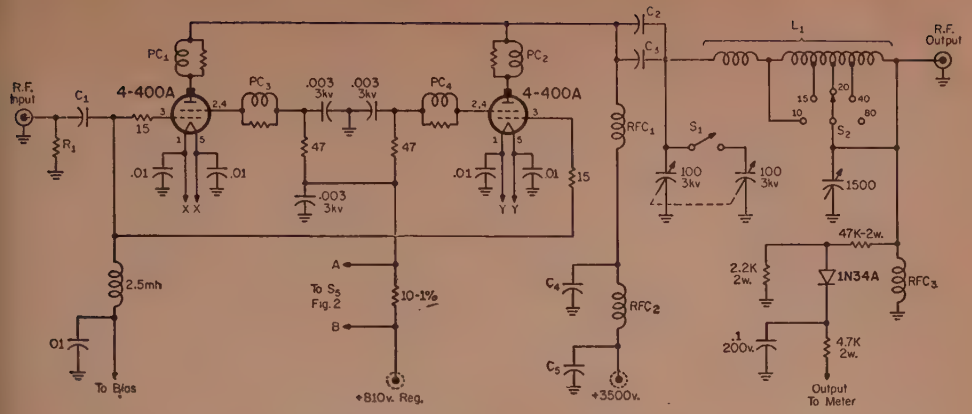

Fig. 1—Circuit of the 2 kw p.e.p. linear amplifier. All capacitors are disc ceramic unless otherwise noted and all resistors are 2 watts unless otherwise indicated.

C_1—.001 mf 1 kv transmitting type mica.
C_2, C_3—500 mmf, 30 kv TV type capacitors.
C_4, C_5—500 mmf, 20 kv TV type capacitors.
L_1—B&W 850A Pi-network.
PC_1, PC_2—3t #14 busbar, 1½" dia wound around four 220 ohm 2 watt resistors in parallel.
PC_3, PC_4—3t #18 wound tight and spaced evenly on a 47 ohm 2 watt resistor.
R_1—100 ohm 100 watt non-inductive resistor.
RFC_1—145 mh, 800 ma. National R-175A or equiv.
RFC_2—Ohmite Z-50.
RFC_3—10 mh, 1 amp. r.f. choke.
S_1—S.p.s.t. ceramic rotary mounted on 1" standoffs.
S_2—Part of L_1 assy.

path should one of the coupling capacitors short.

Control And Metering Circuits—So far, the linear is more or less standard. It is simple in basic design and construction. However, the control circuits are one of the most outstanding features of the linear and are applicable to many other amplifiers. As shown in fig. 2 two Amperite thermal delay relays are used in the safety system. These relays have heat sensitive contacts which either open or close after the heater has been on for a pre-set time. The 115NO15 operates on 115 volts a.c., has normally open contacts and closes after fifteen seconds. When the filament switch, S_1, is first closed, the filament power light and blower come on. A small amount of current passes through the Globar resistors R_1 and R_2. At first the tubes will not even show a glow (a far cry from the surge of current normally observed without the series resistors), then as the Globar thermistors heat, their resistance goes down and the voltage on the filaments of the 4-400A's slowly rises until it reaches a steady state of about 4 volts (10 seconds). After fifteen seconds, the thermal delay relay closes and allows full voltage on the filaments. By preventing this harmful cold surge current, the filament life of the tubes should at least be doubled.

The other thermal delay relay is a 115NO180. It has a delay of three minutes. This is the plate delay relay. Even if the plate switch S_2 is thrown, nothing will happen until three minutes have elapsed. This gives all tubes ample time to warm up before the high voltage is turned on. A "ready" light will come on after the allotted time, showing that the relay has closed and that high voltage may be applied. The other pilot light is the plate indicator showing that high voltage is on. If one should care not to wait three minutes to apply high voltage, a relay with a shorter delay time can be used; just unplug one relay and plug in the other.

The bias supply is a bridge network of silicon rectifiers. The BIAS ADJ. control (located on the front panel) determines the bias voltage on the grids when the terminals of TB_1 are *shorted*. If they are open, the full bias voltage (250-300 volts) is put on the grids, thus cutting them off. The terminal will normally go to a relay which

Front panel view of the metering and control circuit for the 2 kw p.e.p. linear amplifier. The left meter, calibrated from 0-5 kv, is used for the multimeter and is controlled by the switch below it. The right hand meter is for cathode current and switches S_3 and S_4 are below it. The filament toggle switch S_1 and PL_1 are in the lower left corner. The center knob is the BIAS ADJUST control and the plate toggle is between PL_2 and PL_3 on the right.

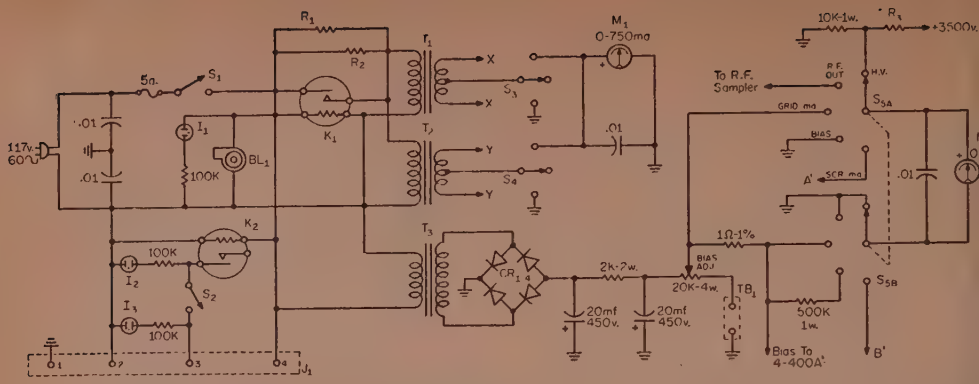

Fig. 2—Control circuit and bias supply for the 4-400A linear. This circuitry is incorporated in the amplif chassis with power supply control connections being made via J_1.

B_1—100 c.f.m. blower. Dayton #2C781 or equiv.
CR_1, CR_2, CR_3, CR_4—Silicon Rectifiers, 1N1096.
I_1, I_2, I_3—NE-51 Neon bulbs and Dialco Neon Panel assemblies.
K_1—Thermal Time Delay relay. Amperite 115NO15.
K_2—Thermal Time Delay relay. Amperite 115NO180.
R_1, R_2—G-C Globars. Type 25-910.
R_3—Five 1M 2w. resistors in series.
S_3, S_4—S.p.d.t. toggle, center off position.
S_5—D.p. 6 position non-shorting rotary switch.
T_1, T_2—5v, 15 amp filament transformer. Triad F1 or equiv.
T_3—250v, 25 ma. Stancor PS-8416 or equiv.

will break the connection for receive and short the terminals for transmit. (Note: I chose to place a 10K pot across the terminals of TB_1 and adjusted it during receive operation so that the finals drew about 50 mils of current for regulation purposes. This is not necessary with a well regulated supply, but the voltage rose from 3500 to 4200 thus exceeding the 2 kv each or 4 kv total rating of the filter capacitors.)

The plate current meter is located in the cathode circuit. It measures both plate and screen current, but since screen current is comparatively small, it will read plate current for all practical purposes. Two filament transformers are used, so it is possible to meter either one or both of the tubes. The toggle switches S_3 and S_4 have "center-off" positions and it is possible to cut one of the tubes out of the circuit completely by breaking the cathode ground connection. This is ideal for running reduced power.

Power Supply—This is a very conventional circuit and only brief description is necessary. The transformer is rated at 3500-0-3500 volts at 400 ma, but will easily deliver quite a bit more for amateur use. It has two inputs that may be paralleled for 115 volt operation or series for 230 volt operation.

Both filament and plate power are operated by 115 v.a.c. power relays and provision can easily be made for manual operation.

Bottom view of the input section of the linear amplifier with the bottom plate removed. The 100 ohm non-inductive resistor and the 1 kv mica capacitor may be seen over the 4-400A sockets.

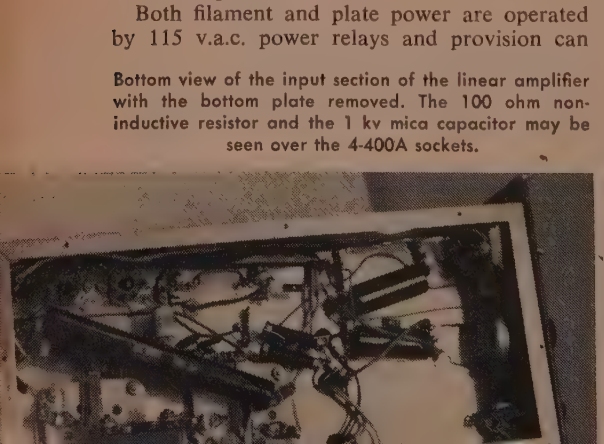

Mechanical Layout

The amplifier is built on an 8¾" grey wrink standard rack panel, a chassis 7×15×3 inch another 2½×9½×5 inches and a 15×17 in bottom plate. The bottom plate is cut into t pieces . . . one 15"×7" and another 15"×1 which is used as the foundation for the ban switch and tuning components. The small cha sis is bolted, on its end, to the main chassis a bottom plate. The r.f. output connector and t h.v. connector are located on this small chass The relative power output circuit is located side the small chassis.

The B&W coil is mounted directly on the b tom plate, but the lower tuning capacitor mounted on one inch insulators to allow t shaft to come through the front panel at t proper height. The loading capacitor is bolt to the side of the aluminum angle bracket a also bolted to the small back chassis with a pie of angle iron. An off-set ball joint drive is us to permit proper alignment of the shaft when comes through the front panel.

The 4-400A tube sockets had to be su mounted ¼" to allow clearance for the cabi top. The tubes can be sub-mounted at a depth, so long as the air holes at the base of tubes are not covered up.

The blower, a 100 c.f.m. size (although a c.f.m. could be used equally as well), is mount on the back of the main chassis. It must be moved to put the linear in the cabinet, and th installed from the back by means of wing nu The top and bottom of the blower mount flange had to be trimmed to allow flush mou ing with the top and bottom of the main chas

Testing And Operation

As mentioned earlier, testing is extremely si ple. The filaments were turned on to check

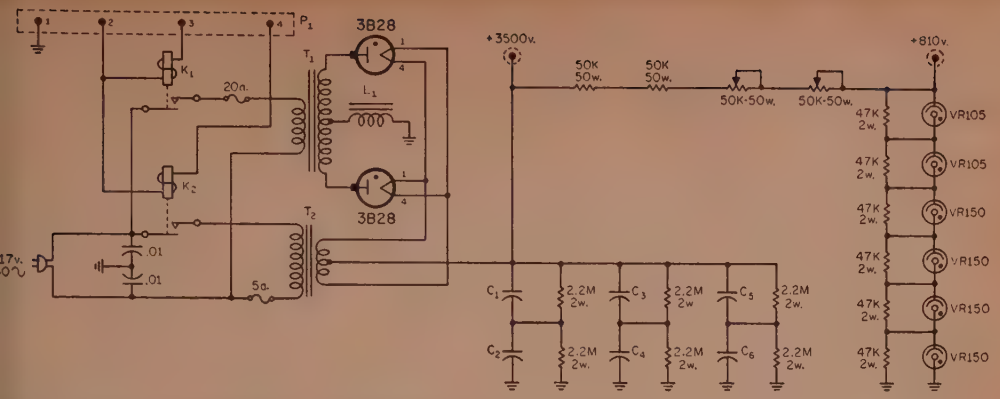

Fig. 3—Plate and screen supply for the 2kw linear. All control functions are handled from the amplifier chassis via P_1.

C_1, C_2, C_3, C_4, C_5, C_6—4 mf 2 kv oil filled. Available from Fair Radio.

K_1, K_2—D.p.s.t. 115 v.a.c. relay. Potter Brumfield #PR7AY.

L_1—10 h, 500 ma. Available from Fair Radio.

T_1—3500-0-3500 v.a.c. at 500 ma. Osborne #8924. Osborne Trans. Co., 3834 Mitchell Ave., Detroit 7, Mich.

T_2—2.5v, 10 amps, filament transformer. Triad F5U or equiv.

filament-saver circuit. At first there was no glow, but ten seconds later they were at almost full brightness, and when the delay relay closed, there was a final bright glow as the filament reached the full five volts.

Three minutes later the "ready" light came on showing that the plate switch could be closed. Both the cathode current switches were placed in the center OFF position to prevent any current from being drawn when h.v. was put on the plates. The bias voltage was set for maximum, about 310 volts and the plate switch was then closed. The multi-meter indicated 4200 volts on the plates. First one, then the other cathode switch was placed in the METER position and, as was expected, since the bias was at cutoff, no current flowed. As the bias was lowered (TB_1 was shorted) the static plate current began to climb until it reached the rated static current of 180 mils (90 mils each). At this point the tubes were showing a dull red glow which is normal.

Previously the HT-32B was loaded into the linear and it was now possible to inject a small amount of r.f. for tuning. Another method would be to set the bias control for cutoff, add r.f., then back down on the bias until 200 mils were being drawn. Now, with the multi-meter in the R.F. OUT position, it is easy to find resonance and load for maximum r.f. output.

Throughout the entire procedure, nothing unusual happened and ten minutes after the filament switch was thrown, the linear was putting a solid 1,000 watts c.w. on the 40 meter band. There wasn't any trouble with harmonics or parasitics on *any* band at any time.

The input impedance is approximately 100 ohms, a slight mismatch for 50 ohm transmitters. It would be best to use RG-11/U for connections from exciter to transmitter. It will be best to use as short a lead as possible, although, as much as six feet seems to work fine.

The cost of parts for the linear was about $175, excluding the cost of the 4-400A's which sell new for $48.00 each. The cost of the power supply is far lower than commercial units . . . about $150.00. The total cost of the linear is far below many other commercial linear amplifiers and it features broadcast quality and ruggedness found only in the most expensive linears on the market today.

If you have been running "barefoot" for a while and you aren't satisfied with the thorns of QRM and the bruises of QSB, then try on some shoes . . . "Shoes—Size 2 kw." ■

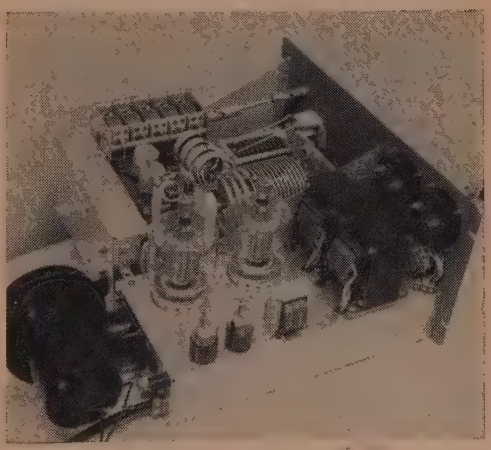

A three quarter rear view of the 2 kw p.e.p. linear amplifier shows the layout of the input chassis in the foreground. The two plug-in time delay relays are in the lower left corner. Alongside them is T_3, the bias supply power transformer. The two transformers near the front panel are T_1 and T_2, filament transformers for the 4-400As. The output tuning section is built on the bottom plate and the rear chassis, mounted on its side, contains the relative output circuit, the r.f. output connector and the high voltage connector The parasitic chokes may be seen connected to the plate r.f. choke which also mounts the two TV type coupling capacitors.

Twoer and Sixer Modification

BY TOM BECKETT*, W5IUU

The popular Heath Transceivers, Twoer, Sixer, Tener and CB-1, are inexpensive but lack operating refinements more often found in higher priced units. The use of a relay provides push-to-talk operation and a rotary switch addition provides multiple frequency operation.

THE Heath Sixers and Twoers have proven themselves to be effective for fixed and mobile operation. Their popularity is due in no small part to the moderate cost as well as excellent performance. There are, however, several changes that would increase operating efficiency. First in importance, I feel, is push-to-talk operation and second is to be able to change frequency (over a narrow bandwidth, of course) by switching crystals. All this can be done without sacrificing any existing functions or impairing the operation in any way.

Push-to-Talk Modification

For this conversion it is necessary to replace the front panel T-R switch with a 4 pole double throw relay. A method of energizing the relay coil for all modes of operation had to be found and was really very simple. A relay with a 10K coil, requiring an energizing current of 5.25 milliamperes, is placed in series with a 20K 5 watt resistor and wired across the B plus 250 volt line. As shown in fig. 1, the relay circuit is complete only when the microphone press-to-talk switch is depressed.

The relay is mounted behind the front panel just above the T-R switch by means of an L shaped bracket. With the relay used, the bracket mounting holes had to be drilled just above the



Fig. 1—Wiring for the relay coil and microphone push-to-talk operation in the Heath transceivers HW-HW-29, HW29A and CB-1. The relay is a Po Brumfield GB-17D with a 10K coil.

Heathkit plastic emblem.

When the relay is mounted it becomes a sim matter to transfer the wires from the T-R swit section by section, to the relay contact termina How this is done is shown in fig. 2.

When a wire is removed from the switch must be rerouted up through the hole in t chassis just alongside the switch. If the wire not long enough to reach the relay termi designated, it should be followed back to point of origin and a new and longer w soldered in and run to the relay. This will prev an unsightly mess of splices bound to ca trouble later.

In some instances the switch lug is used a terminal point, that is, there is more than wire tied to it. For a neat job it is best to rero the wires so they junction at some other po

*3868 Potomac, Dallas 5, Texas.

Bottom view of the modified Heath Twoer showing the new crystal selector switch on the right of the front panel. Care must be taken to clear the components when drilling the holes for the new crystal sockets. The vertical terminal strip just behind the switch is for the antenna circuit junctions.



Model		A	B	C	D	E	F	G	H	I	J	K
Twoer	HW-30	3	2	6	4	5	8	9	7	12	10	1
Sixer	HW-29A	9	8	6	4	5	2	3	1	12	10	1
Sixer	HW-29	3	2	6	4	5	8	9	7	12	10	1
Tener	HW-19	3	2	6	4	5	8	9	7	12	10	1
CB-1		3	2	6	4	5	8	9	7	12	10	1

Fig. 2—Correlation of relay and switch wiring fo various Heathkit transceiver models is shown in drawing and chart above.

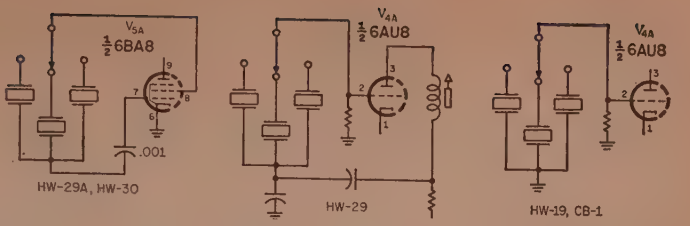

Fig. 3—Wiring changes for crystal switching in the various Heath models, is shown above.

and run a single wire through the hole to the relay. If you lack experience and are nervous about rerouting wires it is possible to lift the connections off the switch lugs, add a length of wire and run it to the relay. Just be sure to splice carefully and tape well.

When extending the relay section that switches the antenna, the precaution of using coaxial cable is recommended. The three lengths cannot fit in the hole along with the other wires so a ⅜" hole is drilled between V_3 and V_4. It is located about 2¼" from the right edge and 3" from the rear of the chassis.

A four lug vertical tie strip is mounted on the same screw supporting the 3 lug tie strip near the old T-R switch. It is used as a junction for the coax cables and any blocking capacitors that may be found in the model being converted. (The Twoer has 2 blocking capacitors, one model Sixer has one and another Sixer has none.)

The p.t.t. conversion is applicable to other similar Heathkit units as listed in the chart in fig. 2. The chart shows the variations in switch to relay connections for each unit.

In those models that use shielded wire for connections F, G and H, a single 3 conductor shielded wire should be used to extend the wires and care should be taken to dress the shield away from the relay terminal board.

Also, the B plus voltage for the relay coil is picked up at relay lug A as shown in fig. 2. This is valid only in the HW-29A and the HW-30. For the other units the 20K resistor lead must be brought below the chassis to the 225 volt line. This may be found at the junction of the 330 ohm 2 watt and 10K 1 watt filter resistors. If this change is not made there will not be adequate current to pull the relay in.

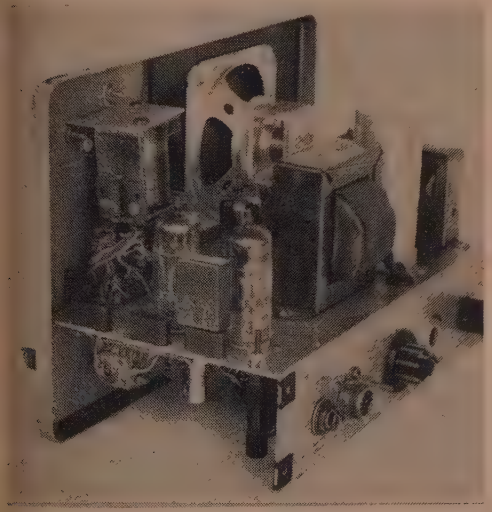

Rear panels view of the modified Heath Twoer shows the push-to-talk relay mounted on the front panel. The two additional crystal sockets may be seen along the edge of the chassis.

Microphone Modification

Remove the screw-on type microphone connector and replace it with a Mallory #702B jack which is a 3 circuit open affair. Wire it as shown in fig. 1. It is important to use the order shown for tip, ring and sleeve. If the order is changed, the insertion of the mike jack can accidentally bring the crystal or ceramic element in contact with the B plus.

Crystal Switching

There is sufficient room to add two more crystal sockets in line with the existing crystal and the front panel. The switch to select the crystals can be placed in the old T-R switch location. A Centralab #2001 one pole 2-12 position rotary switch was used. It was set for a three position stop. The simple circuits are shown in fig. 3. The old T-R switch knob is used for the crystal switch so the outward appearance of the unit does not change at all.

The span, in frequency, between the highest and lowest crystal will vary and depends to a great degree upon the bandwidth of the antenna. This will have to be determined experimentally. Since the selector switch will accommodate more crystals you need only find room for them on the chassis and stay within the bandwidth to have more flexibility, frequency wise. ■

"... and I would also appreciate a QSL. My call is ..."

Project Interference

Part 1

BY JOHN H. GRADY*, K4TUA

This series covers the research conducted to identify the principal sources of excessive interference on the amateur spectrum. In addition, the series provides a workable plan of action called "Operation Quality Cleanup," to achieve more effective and efficient operation on the amateur bands with a significant reduction of interference. Part I deals with some of the causes of interference and an analysis of the useable portions of the amateur spectrum. Part II will deal with the quality of signals and the effect of signal quality on bandwidth. Part III describes, in detail, a campaign to improve conditions on the bands.

THIS paper was developed to supply answers to the questions: What can we do **about** interference in the amateur bands? And, how can we secure more effective and efficient operating in our spectrum?

The object of the study was to create an improved program of amateur compatability—one which would provide a means for more harmonious operation in the amateur bands through the use of good quality signals, good operating techniques and prevention of interference with other amateurs on the band.

A good example of the interference problem can readily be observed by tuning across the 40-meter band. One will hear, superimposed on foreign broadcasts, a cacaphony of distorted, garbled whistles, squeals, and other background noise that represents what may be collectively labeled "interference."

At present, the interference level on the active amateur bands has nearly reached the saturated or intolerable stage, and unless immediate action is taken to reduce the amount of interference, we will not be able to keep up with the demands of an increasing amateur population.

There are four basic types of interference (noise): galactic, solar, atmospheric and man made. To insure that we are on common ground, radio interference may be defined as any objectionable, radiated or conducted electrical disturbance which interferes with the operation or reliability of communications. This article will be concerned *only* with man-made types of interference.

Amateur Spectrum Compression

The FCC-assigned amateur spectrum for all modes of transmission on each of the 80, 40, 20, 15 and 10-meter bands is shown in Table I.

It has already been established by Jacobs and Leinwoll[1] that "the present sunspot cycle is declining, and will continue to decline for the next four years. This decline will be responsible for steadily poorer conditions on 20, 15, 10 and 6 meters, but increasingly improved conditions on 40, 80, and 160."

These facts can be readily confirmed by tuning across the bands and noting that only spasmodic openings occur on 10 and 15 meters, 65.1% of available amateur h.f. spectrum.

If, during the next three years, conditions on 20 deteriorate to those presently found on 10 and 15, then by 1965 or before, all active amateurs will be forced to leave 20 meter (10.6% of h.f. spectrum) and operate on 40 and 80 (24.3% of h.f. spectrum).

With infrequent openings on 10 and 15 meters the present active amateur spectrum has been compressed from 100% (80 through 10) to 34.8% (20, 40, and 80) with the probability of shrinking to 24.2% of the available h.f. spectrum (40 and 80).

Based on our present amateur population the continuing rise in band activity (each succeeding year establishing new all-time-high band activity records), has already resulted in an overloaded per-channel density. The degree of interference has nearly reached an insufferable stage.

If the interference has nearly reached the saturation stage today, think what it will be like when our population doubles!

Table I—H. F. Amateur Spectrum

Band	Frequency (mc)	Bandwidth (kc)	Bandwidth %
80	3.5-4.0	500	15
40	7.0-7.3	300	9
20	14.0-14.35	350	10
15	21.0-21.45	450	13
10	28.0-29.7	1700	51
	Total	3,300	100

Table I: The amateur spectrum illustrating the number of kilocycles available for h.f. communications and the percentage of spectrum allotted to each band. The 160 meter band was not included in this survey.

*404 North Briarcliff Road, Warner Robins, Georgia.

[1]Jacobs, F. & Leinwoll, S., "The Sunspot Story; Cycle 19 The Declining Years," (Part I) *CQ*, April '61, p. 27.

Interference Reduction Plans

In preliminary studies of our interference problem, you have probably discovered literature on the elimination of interference published during the past five years. Contained therein are a variety of approaches, points of view, and philosophies which present a bewildering hodgepodge of ideas.

Several approaches have been recommended: One group advocates that pressure be applied on the authorities to expand the amateur spectrum and thereby lessen interference; another group contends that lowering the amateur r.f. power limits would reduce interference. It should be obvious that neither procedures would correct the basic problem.

Analyzing the first recommendation, we find that the Geneva Radio Conference in 1959 made provisions for continuance of every amateur assignment established by the Atlantic City Radio Convention in 1947. Based on the pressure exerted by commercial interests for expansion of their spectrum, we have no assurance that W/K amateurs will be so fortunate at the next Radio Conference, probably in 1964 or 1965, much less get *more* spectrum space.

Analyzing the second recommendation, while there are numerous conditions generating interference on the amateur bands, an important one is heterodyne action, and it should be readily seen that a reduction in output power will not remove the heterodyne.

Tune across the bands any night and you will hear statements pertaining to interference such as: "Sorry, but missed everything but your name during your last transmission because of the QRM"; "Local station splattering all over our frequency that time and covered you us completely"; "Please give me a repeat," or "Thought we could make a go of it but guess we had better cut it off now," *etc.*

Causes of Interference

A study was made and the following sources of interference were found on the amateur bands: on-channel interference; adjacent-channel interference; Excessive signal bandwidth; failure of a station in contact with another to accurately zero-beat the other, thus occupying more spectrum space than required; on-the-air tuneup rather than the use of a dummy load; failure to listen on frequency before tuning up and transmitting; frequency instability; sideband splatter, *i.e.*, signals lying outside the intelligence bandwidth; spurious radiations; presence of carrier on s.s.b.; noise and hum on carrier; inefficient phone patch causing over-modulation and broad signals; local and short-haul contacts using high power, which could easily take place on the v.h.f.s; chirps; clicks; Russian and Russian satellite jamming stations; power lines and consumer appliance (not covered in this article); foreign commercial stations; and last, foreign broadcast stations.

The widespread presence of excessive signal bandwidths and distortion products, resulting in serious interference, was noted during this study. As a result, it was decided to conduct additional research to determine whether the excessive interference found on the s.s.b. and a.m. portions of 40, 20, and 15 was primarily due to either excessive bandwidth of the transmitted signal or from general distortion products on the signal.

Table II—A.M. Bandwith Observations

Bandwidth (kc)	40m. Observ.	%	20m. Observ.	%	15m. Observ.	%	All Band Total	%
6	9	3	24	4	3	3	36	3.6
7	24	8	54	9	8	8	86	8.6
8	30	10	66	11	11	11	107	10.7
9	45	15	84	14	15	15	144	14.4
10	96	32	180	30	31	31	307	30.7
11	36	12	78	13	12	12	126	12.6
12	24	8	42	7	8	8	74	7.4
13	15	5	36	6	5	5	56	5.6
14	12	4	18	3	4	4	34	3.4
15	6	2	12	2	3	3	21	2.1
15+	3	1	6	1	0	0	9	0.9
TOTAL	300	100%	600	100%	100	100%	1000	100%

Table II: A.m. bandwidth observations made on 40, 20 and 15 meters with percent or total observations tabulated in the last column. Note the similarity from band to band.

Bandwidth/Distortion Study

The following equipment was used during this study: Telrex 5 element 20 m. beam on 95 foot tower; Hy-Gain Thunderbird TH-4, 20, 15 and 10 m. beam on 50 foot tower; Hy-Gain 14AVS vertical, 40, 20, 15, 10 m.; 15, 40, 80 m. doublets, and a Collins 75S-3 receiver.

It was believed that a sample size of 1,000 observations with 30% on 40, 60% on 20, and 10% on 10 would be satisfactory on s.s.b. and a.m.

Table III—SSB Bandwidth Observations

Bandwidth (kc)	40m. Observ.	%	20m. Observ.	%	15m. Observ.	%	All Band Total	%
3	9	3	12	2	3	3	24	2.4
4	75	25	138	23	24	24	237	23.7
5	93	31	174	29	30	30	297	29.7
6	60	20	126	21	22	22	208	20.8
7	42	14	108	18	15	15	165	16.5
8	12	4	24	4	3	3	39	3.9
9	6	2	12	2	2	2	20	2.0
10	3	1	6	1	1	1	10	1.0
TOTAL	300	100%	600	100%	100	100%	1000	100%

Table III: S.s.b. bandwidth observations. Only 40, 20, and 15 meters were used in this study. The last column indicates the percentage of observations of each bandwidth.



Fig. 1—Bar graph showing percentage of a.m. signals of various bandwidths (from 1000 observations).



Fig. 2—Graph showing percentage of s.s.b. signals o various bandwidths (from 1000 observations).

The duration of the nightly tests and beam directions were as follows:

Time (GMT)	*Bearing*
2300-0030	East Coast
0030-0200	Midwest
0200-0300	West Coast

The recognized procedures for determining the bandwidth of the wanted and unwanted sideband of the transmitted signal were given by Scherer[2] as follows: "Unwanted sideband: Set the receiver sideband selector for the wanted sideband, and tune in the signal to the basic frequency. Then change the sideband selector for the unwanted sideband, and tune the receiver to the furthest point out on the unwanted side at which signal modulation may be found. The difference between the original signal frequency and that at which the receiver is now tuned will be the bandwith on the unwanted sideband (minus any error which may be due to receiver selectivity deficiencies).

"Wanted sideband: Set the receiver sideband selector for the wanted sideband, and tune in the signal to the basic frequency. Tune the receiver to the furthest point out on the wanted side at which signal modulation may be found. The difference between the original signal frequency and that at which the receiver is now tuned will be the bandwidth of the wanted sideband.

[2]Scherer, W. M., "What About Sideband-Suppression and Bandwidth Reports?," *CQ*, May '60, p. 42.

"A report may be given to the total bandwidt (lower plus upper), or it may be given for eac sideband separately." Also, "when any observa tions are being made, care must be taken so a not to mistake adjacent channel signals fro other stations for those of the transmitter bein checked."

Before requesting a bandwidth check, assu ance was given that the receiving station's re ceiver had a one kc readout and the afore mentioned approved bandwidth procedure wa used.

Bandwidth Findings

A total of 1,000 observations were made o 40, 20, and 15 to determine the bandwidth o a.m. signals. Bandwidths ranged from 6 to ove 15 kc. A summary of the findings is as follows 68.4%, 8 to 11 kc in width; 96.4%, over 6 k wide; 3.6%, 6 kc wide. (Table II).

A total of 1,000 observations, to determine th bandwidth of s.s.b. signals, were made on 4 20 and 15 m. Bandwidths ranged from 3 to 10 k A summary of the findings is as follows: 82.7% 4 to 6 kc; 2.4%, 3 kc; 14.9%, over 6 kc; 97.6% over 3 kc. (Table III).

Part II of this analysis, to be presented ne month, will discuss the quality of a.m. and s.s. signals observed and will attempt to set a stan ard by which their signals may be judged.

[*To Be Continued*]

New Amateur Products



Amplidyne VHF Equipment

THREE new pieces of v.h.f. equipment have be announced by Amplidyne Labs of Kings Park, N. They include a 50, 144 and 220 mc bandswitchin crystal controlled converter, a 50 and 144 mc transmitte and an adapter using the transmitter's modulator, pow supply, metering circuits and some 55 mc output allow 220 mc operation.

The Model 126 converter employs the same grounded-grid circuitry used in the single band mc converter (*CQ*, March '63, page 42). Two Nuvistors as r.f. amplifiers provide noise figures 2.5 db on 50 mc, 3.0 db on 144 mc and 4.0 db on 220 mc. The converter is priced at $94.50.

The Model 621 50 and 144 mc transmitter runs 60 watts input to an 8150 Compactron and plate modulated. Separate output connectors are provided for 6 and 2. Built-in push-to-talk, dummy load, full metering, crystal switching and antenna relay, among other things, are feature Provision is made to connect the Model 221 220 mc adapter. The transmitter is priced at $229.5

The Model 221 220 mc adapter consists of a 6CL6 doubler (from a 55 mc signal), 63 doubler (to 220 mc), and a 6360 amplifier running 18 watts. Power, modulation and 55 excitation are supplied by the Model 621 transmitter. The Model 221 sells for $72.50.

For further information circle A on page 110.

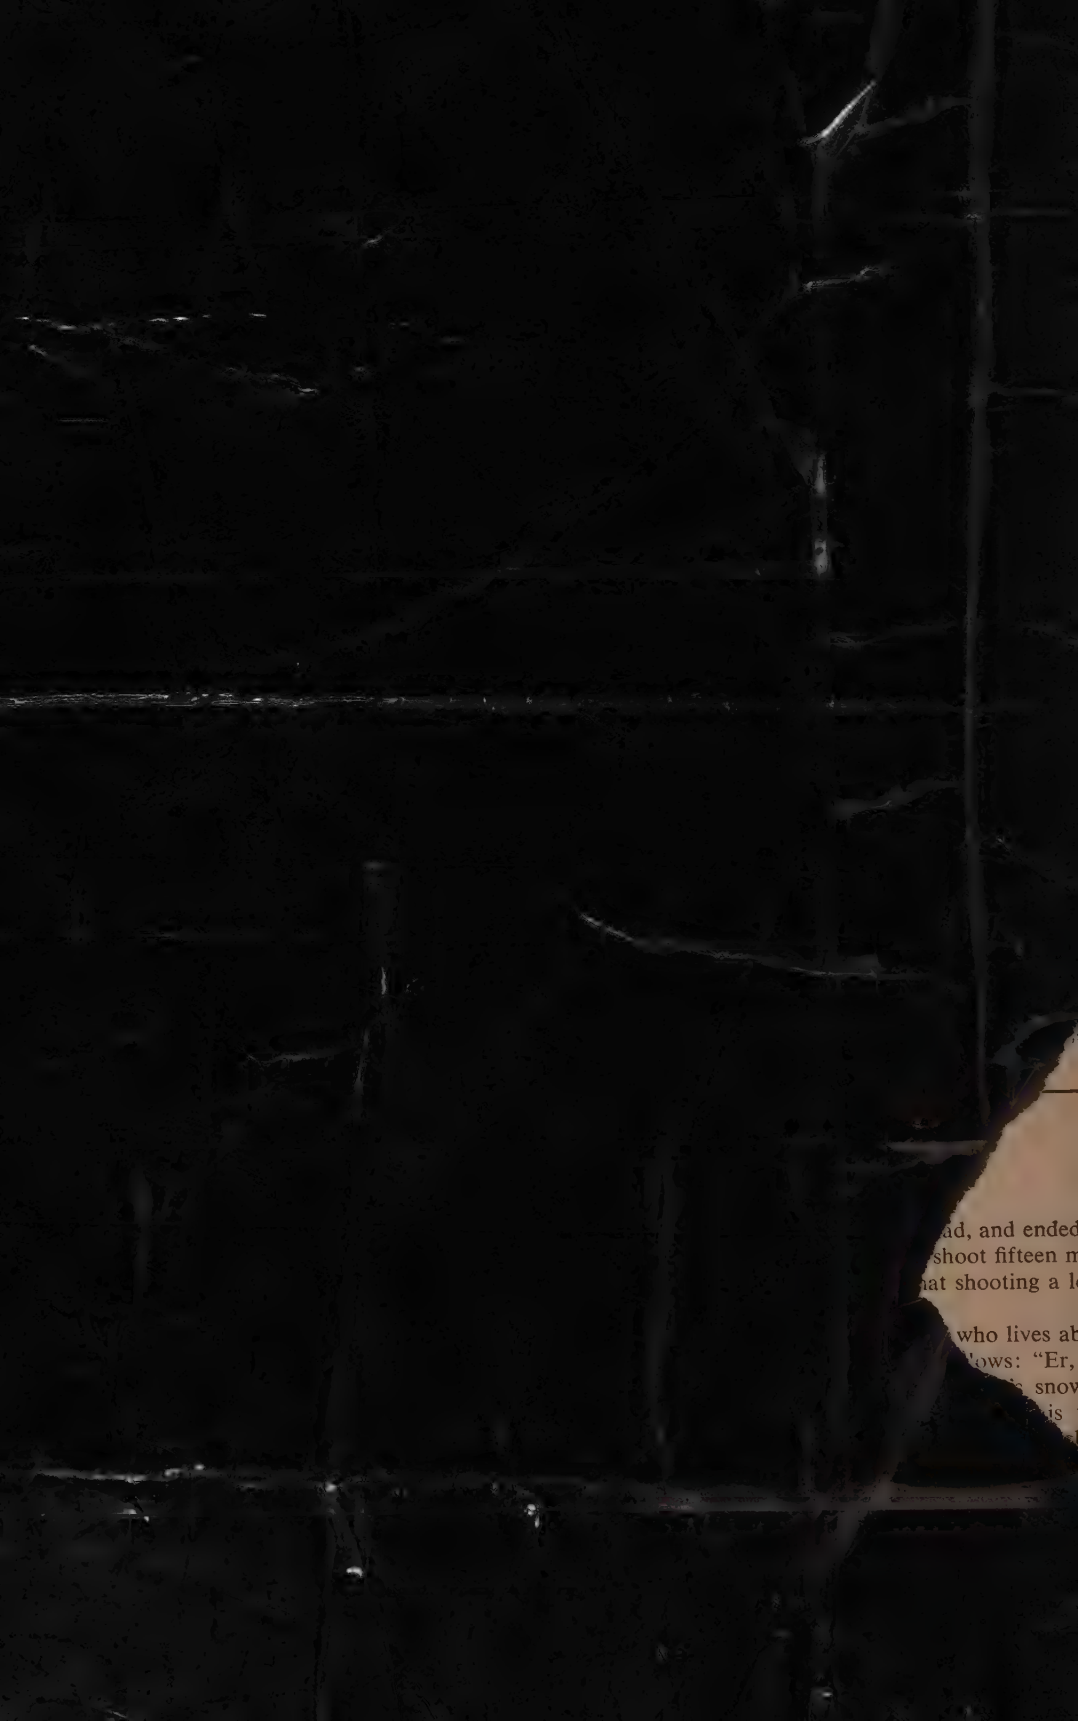

Modifying The Millen 90800 Exciter

BY DAVID T. GEISER*, WA2ANU

The Millen 90800 has been seen selling for as little as $5.00 on some distributors shelves. Without additional shielding and the complete elimination of TVI there isn't much that can beat the dollar-per-watt value of this one-night project.

THE MILLEN 90800 Exciter (now superseded by the modern Millen 90801) was an excellent example of all that was best and worst in amateur transmitters before the second world war and the advent of television. There are hundreds of these transmitter/exciters that still exist, but no sensible ham would operate them within 100 miles of a television receiver. They generate an effective signal but terrible TVI when operated at or above 7 mc. This modification was made specially to show a group of beginners that carefully designed changes made shielding unnecessary even in a "deep-fringe" TV area. The particular modification described was aimed at 40 meters, but the principles are well known and apply generally.

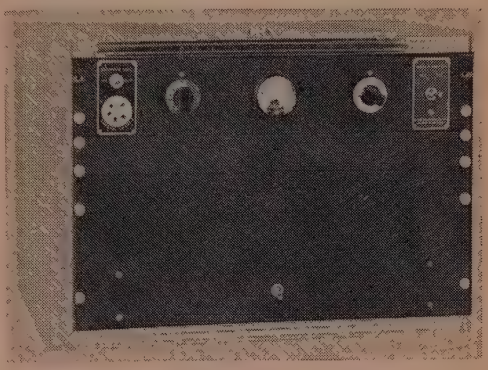

The Millen 90800 exciter with its associated power supply.

The Challenge

The folks in the beginners class were puzzled about how a clean transmitter could be made without shielding, and I figured the best way to explain was to show them. I kept my eyes open for one of the old Millen exciters figuring that if I could cure it, any rig could be cured. For those who are not familiar with it, a 6L6 crystal oscillator (tri-tet) drives an 807 final. The oscillator is capable of delivering 15 or 20 watts, but the final needs only ¼ watt and retaliates by creating massive amounts of TVI. As there is no shielding and the bypasses are not particularly good, the TVI radiates. Operation on 7 mc results in damaging TVI each 7 mc throughout the TV spectrum. This means every other channel is hit badly. Filters in the transmitter feedline are no good, for the lack of shielding allows the TVI to pass around the outside of the filter.

The Oscillator

The first step is to strip the oscillator of all wiring. The existing oscillator produces much TVI and is past saving. The oscillator is rebuilt with the circuit of "The Simplest and Cheapest Rig."[1] The oscillator tuning capacitor is removed, and the paint under its mounting feet is scraped clean. A bracket is made from flashing copper to fit between the capacitor mounting feet and the chassis extending to the capacitor rotor connection. A half-inch wide copper strap is run from pin 3 of the oscillator tube to the stator of the oscillator tuning capacitor. These

*Light Military Electronics Dept., General Electric Co., Utica, N. Y.

[1]Geiser, D.T., "The Simplest and Cheapest Rig," *CQ*, Aug., 1963, p. 24.

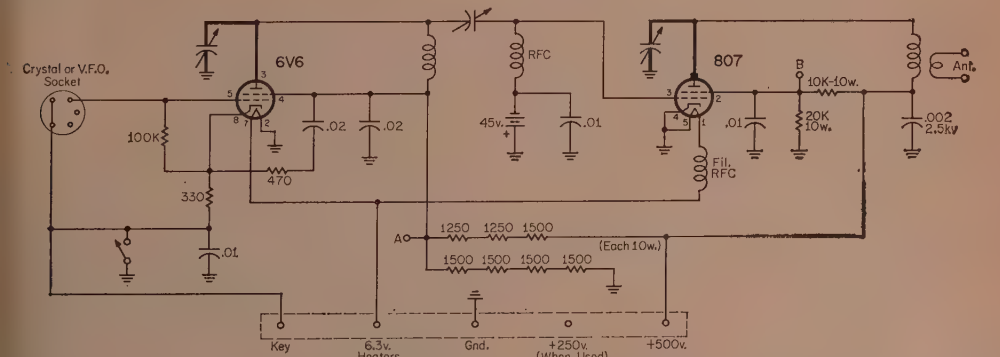

Fig. 1—Circuit of the modified Millen 90800 exciter/transmitter capable of 40 watts input. Points A and B may be fed from 250 volts directly eliminating the nine 10 watt voltage-divider resistors. Heavy lines in the plate leads indicate copper strapping.

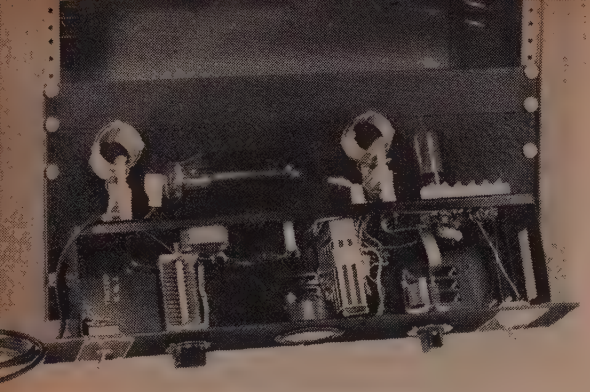

Interior view of the Millen 90800 exciter shows the extent of the modifications. The oscillator circuit is rewired, copper strap replaces wire from the tuning capacitors to the tubes and a 45 volt battery is added to bias the 807 for class AB operation.

heavy straps are always a good idea, though they may not always be necessary. Throw away the bypass capacitors that came with the rig. While you're doing this, you'd just as well take out the heavy bleeder resistor and replace it with a new voltage divider network to feed the oscillator plate. This new divider keeps the oscillator voltage from rising too high under key-up conditions.

All keying is done in the oscillator—it has clean keying without clicks or chirps and the modified final does not mess it up.

The existing 40 meter oscillator coil may be used if turns are removed until the oscillator tuning capacitor, when 90% meshed, just resonates at the bottom end of 40 meters.

The Final

Once the bleeder resistor is disposed of, the modification of the final is easy. The bypasses come out; the final plate circuit is treated just like the oscillator (except that the plate of the 807 is the cap instead of pin 3), and the grid-leak resistor is removed. A 45-volt B-battery is installed with a strap to hold it down—it doesn't have to be too accessible, for it will last at least a year of heavy operating. With the trimmed-down final plate coil, the link makes a pretty good match to 50 ohms.

What we have now is a class AB final amplifier. It creates fewer harmonics than a class or C final, doesn't need as much driving pow doesn't alter the keying waveform, and still p out a solid 24 watts with 40 watts input from 500-volt power supply.

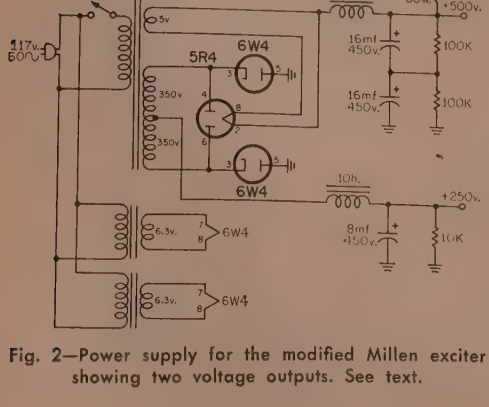

Fig. 2—Power supply for the modified Millen exciter showing two voltage outputs. See text.

The final tank with its 50 mmf tuning capa tor has very low *Q*, but if harmonics aren't bei generated, high-*Q* (10 or more) *just isn't nec sary*. The low-*Q* means that the maximum-outp and plate-current dip points of the final tuni capacitor will shift with loading.

Tuning

Turn the meter switch to the "6L6" positi Dip the oscillator plate current with the le hand tuning knob. Tighten the mica trimn that couples the oscillator plate to the final g until TVI just begins to appear on channel 2 other harmonically related TV channels. Loos the trimmer screw until the TVI disappears. T means that the grid drive no longer causes g current flow. Switch the meter to "807" and the loaded final. It is best to do this whole p cedure with a dummy load.

If TVI appears, make extremely small tuni adjustments. It should disappear very close the points of maximum final output and b keying. Accurate tuning will effect a 40 db duction in TVI producing harmonics, and it impossible to determine this point without wat ing a TV receiver.

Connect the actual load to the final and retu For best results, the actual load should be v close to 50 ohms. As the plate current dip m not coincide with maximum power output, a field strength meter near the antenna to termine the maximum output setting. Remem that r.f. voltmeters and s.w.r. bridges can ca TVI, so disconnect them before making the fi fine adjustment for TVI elimination. This p cedure works well on all rigs and is genera recommended.

General Comment

The specified parts have been carefully cho in this design for the sole purpose of TVI eli nation while retaining reasonable output. Ma 40 meter operators will not consider this po reasonable—I can't argue. The first answer I ceived to a CQ with this rig was from a Z and the average QSO from a good location 600 miles.

Parts substitution should not be made with good reason, though there are many combi tions that will work just as well. This comm is a warning only to those who expect identi results and should not be a deterrent to th who like a little adventure in their lives.

Many will criticize the use of an 807 ope ing straight through without neutralization, p ticularly in class AB[1]. The final will oscil if tuned well off of the operating frequency, loading and careful tuning prevent this conditi The cathode grounding and bypassing with c ceramic capacitors with shortest possible le

[*Continued on page 104*]

The RSGB Golden Jubilee

Direct from London, a report of the festivities marking the 50th anniversary of the Radio Society of Great Britain.

WHENEVER one goes to London, treading those same streets that have been built on and lived on continually for more than 2,000 years, one is always aware that he is in the presence of history. This was never more so than the week of July 1, when an event occurred which was unique in the saga of world amateur radio—the Golden Jubilee of the Radio Society of Great Britain.

It was on July 5, 1913, in the London home of Rene Klein, KXJ, 2HT and, later, G8NK, that a historic meeting took place which was to give birth to the "Wireless Society of London." And now, fifty years later, radio amateurs from all over the world gathered in a cool, damp, crowded London to pay respects to an organization which is recognized and respected wherever the miracle of amateur radio continues to enchant, to intrigue, to stimulate and to inspire mankind.

The elaborate arrangements for the RSGB Jubilee Celebrations took the form of a 5-day convention under the able management of G2FUX, Frank Fletcher. Arrival in London found it busting out all over with foreign tourists. They take their tourists casually here, looking on them as part of the scenery, together with the huge red buses, the wonderful policemen, the acrobatic cabs, the umbrellas, the sooty splendor of the buildings and the calm acceptance that any moment something wonderful is going to happen, like the troop of Household Cavalry clattering along the Mall, a-glittering and a-jangling, or the dramatic emergence of yet another perfect Roman mosaic pavement in the deep-dug foundations of a building under erection.

The first two days, while visitors were still arriving in London, there were trips to places of interest to the amateur—the Radio Research Station at Slough, the BBC Television Center and the headquarters of the Mullard Organization. Arrangements had been made for the wives to be taken on guided tours of London at the same time. It seems that, although the response to this offer was very limited, those who did go had themselves quite a ball, inspecting such historic monuments as the Summer Sales! The charming, if startling, results of these shopping orgies be-

Some of the notables at the luncheon prior to the RSGB Golden Jubilee banquet. L. to r.: G2WZ, Douglas Wederspoon; K9EBE, Trav Marshall of Hallicrafters; G3VW, Bob Newland; G3KD, Phil Thorogood; G3HPH, Leo Gwilt.

A visitor from the US, Mary Sturky, K7BGS (left) and an unidentified friend take some time off from their receptionist duties to enjoy some US-style refreshment.

came evident at the first of the formal receptions —the famous London Members' Luncheon Club on July 3, where the Ladies' hats are a traditional and spectacular feature of the scene.

This is a marvelous thing, this Luncheon Club, 13 years old now and possibly one of the best social institutions in world of amateur radio. About 100 guests met for a typically English lunch and this was for some a first introduction to genuine British beer, which is dark brown, sweetish, always tepid and has to be tasted to be believed, although it kicks back like an ornery jackass.

That same evening there was an Official Reception at the London Planetarium. Here we had the first opportunity for a long ragchew with scores of British amateurs. It was amusing to note that the old homebrew-versus-commercial controversy was just getting into its stride in Britain, but that the pattern of argument is just the same as at home.

Radio amateurs are the same the world over, exponents of all the same opinions that one would expect to meet at Swampscott—only the accents were different. There was the v.h.f. fiend, the guy who thinks a.m. should be abolished by law tomorrow morning (if not sooner), the other one who *knows* that s.s.b. is a lot of bumsteerage and that it will never amount to anything, the oldtimer who has never spoken into a mike in all his forty years of operating.

There was exposure to the exhausting and attractive attentions of a most vociferous lobby

The elegant Connaught Rooms, scene of the RSGB 50th Anniversary Jubilee banquet, July 4, 1963.

called the Amateur Radio Mobile Society, who were responsible for the very first break-through in the reciprocity deadlock when, in April, their Belgian and Dutch members obtained permission for temporary mobile licenses, ON5 and PA9, to be granted to foreign amateurs for the Verviers Rally. One of this group was G3BID, Edgar Wagner, who has the distinction of being one of the two only holders of the Mobile Century Award. Edgar pointed out that "ARMS" is a truly international organization, although it is administered from London, where expenses are comparatively low, and that it is doing some impressive work through its monthly journal, *Mobile News*.

Reciprocity is a great deal in the air over here and opinions are heard, both official and unofficial, that at last something is bound to give in this direction. The problem is particularly pressing and embarrassing in Britain where they calculate there must be some hundreds of licensed U.S. amateurs resident, who are hogtied by lack of reciprical licensing

On July 4 some 60 people were taken by private launch from Westminster Bridge along the Thames to Hampton Court. This is a delightful way to travel and was for centuries the only way to traverse London, for the ancient river was the main transport artery until well into the Victorian era. On board GB3RS/Mobile operated the new KW Project 2000 s.s.b. transceiver.

At Hampton Court some slick organization by the local radio club divided us into small groups, each with its own well-informed guide, who took us round the Palace. Built by Cardinal Wolsey, Henry VIII's minister, in 1515, Hampton Court

Visitors to the RSGB Golden Jubilee came from the most remote corners of the earth as evidenced by this trio. L. to r.: ZS6AZD, Graham Duplessis; W3AYD, Mike Solomon; W3MVB, Jerry Scarno.

was claimed by the monarch when Wolsey i curred the Royal Displeasure, although he w a lucky fellow, for it was at least in his own b and not on the block that the Cardinal died!

When the British go in for glamour, pomp a circumstance, no nation can compete with the Friday, July 5, saw the climax of the week, wi a banquet for more than 400 people at t Connaught Rooms.

Nobody who was there will ever forget th night, which was celebrated with the dignity th the occasion deserved, yet which retained many charming and homely touches. The eveni started with a zing, from the preliminary coc tail party given by KW Electronics Ltd. Then t banqueters queued up (what a country this for queues!) to be presented formally to Norm Caws, G3BVG, President of the Radio Society Great Britain. A British red-coated Toastmast an impressive figure with a superb English acce called names and callsigns with faultless pre sion and the guests stepped forward to shake t President's hand.

The surprising good coffee was poured a the guests were handed a glass of a formidab liqueur which was introduced into Scotland Bonnie Prince Charlie in 1745—how they rea *live* their history! It is a tradition of form British protocol that, until the toast to the Que has been drunk, nobody smokes at a formal tab The American custom of smoking betwe courses is *out*.

Of course such an occasion as this must i evitably be heavy with speeches but those at t R.S.G.B. Jubilee Dinner were so practised, witty and so interesting that it was a privile to listen. The toast to the Radio Society of Gre Britain was proposed by a most distinguish guest, announced by that Toastmaster in son ous, proud and rolling glory: "Pray silence f the Lord Brabazen of Tara, one of Her Majest Privy Councillors, Knight Grand Cross of t Most Excellent Order of the British Empi holder of the Military Cross."

Lord Brabazen turned out to be a youngster nearly 80, who still rides the Cresta Run w

[*Continued on page 105*]

Reviewing The Radio Classics

Extra Wide-Band Antennas

BY DAVID T. GEISER*, WA2ANU

Number 9 of a Series

ANTENNAS are common to both the ham and the public—they simply pick up signals. But when an engineer explains that an antenna will pick up one signal well and others poorly, questions arise.

The amateur finds an easy answer to the question—the antenna is resonant. Only when person after person without technical background asks him "why", does the amateur wonder whether resonance is the entire answer. Resonance is not the whole answer; the final answer has yet to be written. Here is an area for exploration.

Space

Space is a particular form of transmission line connecting a transmitter and a receiver. It has many similarities to television twin and coaxial cable for transmitters. Let us look at these:

Twin-lead and coaxial cable are intended to be uniform from an r.f. source to a load. Each transmission line has a "design" inductance and capacitance per unit length since all conductors exhibit inductance and all conductors with a voltage difference between them exhibit capacitance.

When men design transmission lines, they work with the permeability and dielectric constants of their materials so that in terms of unit length the characteristic impedance R equals $(L/C)^{1/2}$.

When a load of impedance R is connected to this transmission line, there are no reflections of power from the load (unity s.w.r.). There are practical limitations to manufacture, but the electrical characteristics of space are the same everywhere. Space, too, has a dielectric constant and permeability giving it a certain impedance, 377 ohms per square. This is somewhat hard to understand at first, but it is this same value regardless of what unit is used; 377 ohms per square centimeter, inch, foot, or mile. Whenever we build a device that matches this impedance, we have an antenna.

The dipole is one such device—it matches space at its half-wave resonant frequency. At a *few* certain distances above ground, the antenna appears to have a resistance of 72 ohms, but its apparent resistance varies with height. As the antenna approaches ground, its apparent resistance approaches zero. At the frequency of resonance, the antenna, when looking like a pure resistance, does "match space." Thus, if we wish, we can look at an antenna as if it is a transformer matching a low impedance such as 36 ohms (¼ wave) or 72 ohms (½ wave) to the impedance of free space. It is normal to wish that this transformer action would cover a greater part of the frequency spectrum, and that is what the authors of these classics did.

*Light Military Electronics Dept., General Electric Co., Utica, N.Y.

The Background

Since the early days of radio, the cage and fan antennas had been known to be less critical of tuning than those made with a single wire; they had broader bandwidth. This is only another way of saying that they had a better match over a broader frequency range. Yet there didn't seem to be a good antenna that would give a good match over the 10:1 frequency range of many amateur transmitters.

Various amateurs and manufacturers attempted to fill the need with trap antennas, cut and loaded to do a fair job of radiating a signal on several ham bands. There was always an unsatisfied few, for many hams were also interested in non-ham frequencies such as for MARS and CAP. The military was definitely unsatisfied, for they were interested in all frequencies from the broadcast band up.

The Discone

The first true space-matching antenna that this author knows of was publicly described in 1946,[1] the discone. The antenna derives its name from its two elements, one shaped like a disc, the other like a cone. The two are so proportioned that there is a gradual change of impedance from the transmission line to the impedance of free space, at which point the radio energy fully enters space and is transmitted. It is a true wide-band transformer, for it will work at any frequency in an 8:1 to 10:1 range with an s.w.r. of 2:1 or less.

[1]A. G. Kandoian, "Three New Antenna Types and their Application," *Proceedings of the I. R. E.*, v. 34, p. 70W, Feb. 1946, also *Electrical Communication*, v. 23, p. 27, Mar. 1946.



Fig. 1—(A) The discone antenna is named for its two primary elements: the disc and the cone, which together form a broadband antenna usable over a 10:1 frequency range. (B) The cone for a v.h.f. discone may easily be cut from a single rectangle of sheetmetal as described in the text.

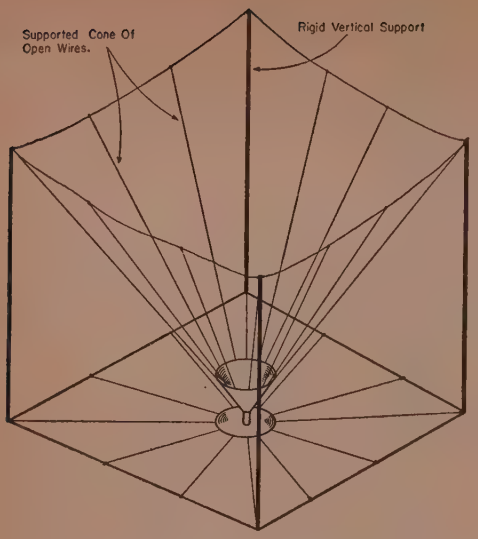

Fig. 2—A low frequency version of the discone may be inverted as shown and may be constructed of wires rather than sheetmetal.

Its radiation pattern is like a ¼ wave vertical antenna.[2]

The design of the antenna (fig. 1) is mathematically simple. For a 50-ohm feed the following proportions are used:

CONE SIDE LENGTH: ¼ wave at lowest freq. plus 10%.

CONE DIAMETER: same.

DISC DIAMETER: ⅔ cone side length.

CONE TO DISC SPACING: 0.3 inch/meter wavelength at lowest freq.

One of the easiest ways to make such an antenna for two meters and higher frequencies is to make it out of sheet metal. To do this with the given dimensions, procure a sheet of metal twice the side-length long by the side-length wide, and scribe a half circle on it. This will make a 60° cone when the curved edge is formed into a circle. A strip riveted or soldered to make a seam will hold the cone in shape. If you wish, metal legs or brackets may be attached to the open end of the cone for attachment to an automobile or roof.

The point of the cone (if formed from sheet metal) should be sawed off to permit mounting of a coax connector within the cone. If the disc is small, it may be directly soldered to the center pin of the connector.

Many hams will want to make a lower-frequency version of the antenna. In this case, only a foot or so of the cone should be made of sheet metal, the remainder being wires continuing down at the same angle. The sheet metal will be structure that looks "pure" at v.h.f. and the wires are good enough at lower frequencies if 12 to 20 are used. Also, the sheet metal cone tip offers a good cover for the husky hardware needed to support the large disc. The l.f. disc need not be

[2]J. M. Boyer, "Discone—40 to 500 Mc Skywire," *CQ*, July 1949. M. Seybold, "The Low-Frequency Discone," *CQ*, July 1950.



Fig. 3—Two versions of the log periodic antenna prior to "folding." Radiation is into and away from the page

solid for more than a foot or so, aluminum angle making good radials that look sufficiently like a disc. It is important, however, to have plenty of strong insulation to support the disc away from the cone.

The discone may be turned upside-down, with the disc slightly above ground level and the open end of the cone up (fig. 2). This has an advantage with 3-30 mc discones, or even higher frequencies, for the supporting poles around the cone perimeter are less than a ¼ wave high and have only to support the weight of conically descending wires. There is no awkward disc to balance.

The discone is a decent vertical antenna that does not require tuning, it is omnidirectional and may be stacked or put in a parabolic reflector for higher gain.[3] It does, however, have the major disadvantage that it is not capable of directional characteristics as is a rotary beam without considerable awkwardness. This is the primary reason for the invention of the log-periodic antenna.

The Log-Periodic Antenna

Apparently, about 1957 it was realized that antennas that made solid angles in space could possess extremely wide bandwidths. Thus, antennas like the discone could be extended infinitely without real change in characteristics. However, refinement of the theory seemed to indicate that for best bandwidth, the two elements of the antenna should have the same shape but have corresponding irregularities extending in opposite directions. An example of such an antenna is shown in each fig. 3(A) and (B).[4] Antennas of these shapes in the positions shown would

[*Continued on page 83*]

[3]Kandoian, *et al*, "High Gain With Discone Antennas," *Electrical Communication*, v. 25, p. 139, June 1948.

[4]DuHamel and Isbell, "Broadband Logarithmically Periodic Antenna Structures," *1957 I. R. E. Convention Record*, Part I, p. 119.



Fig. 4—A log periodic antenna showing the bend angle and the transmitting and receiving direction.

Results of The

7th Annual CQ S.S.B. DX Contest

BY IRV and DOROTHY STRAUBER*, K2HEA/K2MGE

"IF AT first, you don't succeed, try, try again" was never more aptly demonstrated than by the performances of Dr. Harry Schöenherr, DL3LL, during the past three s.s.b. contests. Making his first appearance as a sideband contestant in the 1961 event, Harry took top honors for Germany; in 1962, he was second highest scorer in the world, and in 1963, Harry is *the champion!* Now there's tenacity for you! Harry's winning station consists of an HT-32A with a 500 watt p.e.p. grounded-grid linear, 75A-4 receiver, 20 meter cubical quad up 80 feet, and a half-wave dipole for 3.8 mc. Referring to this as "*the* contest of the year," Harry is our "Man of the Year" and deserves the congratulations of all for his wonderful performance. We are proud that he is this year's winner of the K2HEA/K2MGE Trophy for the highest scoring station in the world, using more than one band.

Hard on Harry's heels, with a remarkable score on 14 mc was Capt. Don Miller, HL9KH, a first-time participant in the s.s.b. contest but an operator who is known and admired throughout the world. As you will note, Don's single band score was phenomenal, particularly in view of the fact that he was using a "barefoot" exciter; again the HT-32, "rewired to the 32B"; *two* 75A-4 receivers, and *two* 14 mc beams in phase, rotated! Don's contest operation makes him the winner of the W1ONK Trophy, given to the highest scoring station using single band outside of the USA.

Adding yet another trophy to his collection is Bob Stankus, W2VCZ, who beat out some very tough competition to become the highest scoring U.S.A. station *and* the second highest in the entire world. That's some operating! Bob will receive the W2SKE Trophy, given to the top multi-band station in the USA. Keep your eye on Bob next year, he should come up with that extra bit of "Oomph" that will help him over the top!

Our fourth trophy winner is Pedro Pereira G., TI2PI, who got the most out of his 32V-2/51SB to rack up 107,118 points which is quite a score for a low power station. Pedro emerged as the highest scoring non-USA multi-band station using under 175 watts p.e.p. He is a newcomer to sideband contests but we bet you'll be hearing much more of him in the future! He will receive the new KØJBK-WØNFA Trophy, donated by Charlene and Chester Franz.

Going down the listing of the highest scoring multi-band stations in the world, it was very interesting to discover that not one, but two of the well-known Russian DXers placed third and fourth in this category. This is the first year that any of the numerous USSR contestants have appeared in the top listing and we are pleased to see that it was Vlad and Leo who made it.

Last, but far from least, considering the tremendous competition he faced, was Rush Drake, K3UDX, who has long been known to the contest fraternity as a formidable but fair rival. Rush especially flew in from his Seattle home to activate his second station in Washington, D.C. for the s.s.b. contest and it sure paid off for him!



This is Matias Garcia Pupo, EA4GZ, better known to his sideband friends as Maty. He has become one of Spain's most ardent sidebander and contest operators.

Four newcomers to the top listing of single band operators made this year's contest unique. Sig Persson, SM5BLA, won second place in Sweden last year; Larry Lee, TF2WHB (now K4MQD), made this his s.s.b. contest debut; Matias Garcia Pupo, EA4GZ, was Spain's top scorer in the 1962 contest; and Victor, UA1MU, distinguished himself among a large number of other USSR single band operators.

Although Ami Shami, 4X4DK, noted that 80 was open only during sunset hours, he managed to work all the stations he heard and wound up as highest scorer on the 3.5 mc band, continuing the fine tradition he set as last year's Champion in the Sixth Annual S.S.B. Contest.

A particularly noteworthy score was turned in by "Ye Olde Forty Meter Master," Bob Sommerfelt, K2GXI, who "slept the afternoon hours away" and missed none of the activity on 7 mc. It's not easy to stick only to one band, especially when conditions do not make for constant activity and it was encouraging to see the various scores which were submitted. This goes for Jack Kecherson, KP4BMA, too, who managed to concentrate on 21 mc long enough to turn in a very fine score.

To our dismay, we were unable to find any USA station using less than 175 watts whose score would qualify it for the Mickey Unger W8YIN Memorial Trophy. Therefore, regretfully, this award will not be made this year.

As explained later, a new category was instituted during the compilation of results—the Multi-Operator group. The boys of the Royal Air Force, using the special call GB3RAF, did a spectacular job of racking up contacts on all bands while USSR operators at club station UA1KBW, did themselves proud with their operation on 20 meters only.

Although the Seventh *CQ* S.S.B. Contest may be just a pleasant memory to most of you, to us it is an event

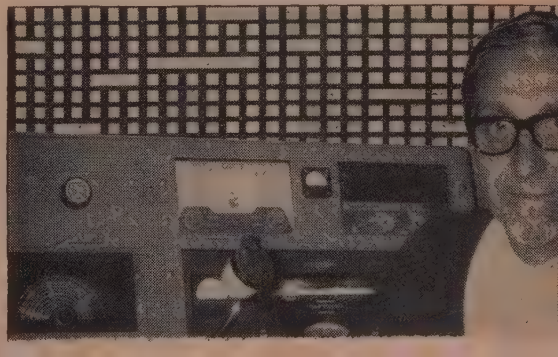

Dr. Harry Schönherr, DL3LL, of Ludwigsburg, Germany, is the Champion in the 7th Annual CQ SSB Contest. Using only two bands, Harry amassed a record-breaking score.

*SIDEBAND Editors, *CQ*.

SM5BLA occupies the No. 2 spot in the single band category. As might be expected, 14 mc was the most popular band during the contest and this is where Sig piled up his big score.

One of the best known sidebanders in the world i Sjoerd (George) Heeringa, PJ2AA, who was the highes scoring contestant in South America.

Top Ten

DL3LL	334,110	SM5BLA	193,280
HL9KH	313,728	UA3CR	186,048
GB3RAF	232,140	UA1KBW	177,282
W2VCZ	223,080	K3UDX	167,162
UA2AW	217,288	UB5WF	161,768

that is still providing much food for thought. The printer's error in scoring, the let-down in conditions, the emergence of many multi-operator stations caused us to make several changes as the results were being compiled and analyzed. The requirement for making at least 100 contacts had to be dropped in view of the poor conditions; we regret that many stations did not submit their logs because their contacts fell short of the 100 indicated.

We also decided that, in fairness to the single operator, a new category should be set up for stations having more than one operator and that these multi-operator stations should be grouped separately. Obviously, the rule regarding multi-operator stations was not clear; it has always been our intention that there be no more than one operator at a station.

At one time, the s.s.b. contest was so simple—merely work as many stations and as many prefixes as you could and that was that! But it has come to the point where the tremendous number of participants has caused a much more complex situation to develop. Although we have been trying not to let the situation get out of hand, each year brings its own share of problems. This year, when we separated multi-band and single band operation for the first time, we were surprised to see that, in many cases, single band operators came up with higher scores than multi-band operators! We also had to re-score many logs due to the mix-up in points. How we regretted having to lower many totals but all logs had to be figured on the same basis.

We have again had many interesting comments from contest participants regarding rules and operating. We expect to get to work immediately, drawing up rules for next year's contest and publicizing them earlier so that more stations will be familiar with the requirements when the big weekend arrives next March. For now, let us thank one and all for your interest, your enthusiasm and your support. We hope to retain all three over the coming years of sideband contests.

Number groups after call letters denote the following: Band (A-all), Final Score, Number of points accumulated, and number of different prefixes worked. Asterisk (*) denotes power used under 175 watts p.e.p. **Bold face** listings indicate certificate winners.

SINGLE OPERATOR

North America

United States

W1ONK	A	**140,616**	**868**	**162**
W1AOL	21	**3783**	**97**	**39**
W1ZFV	14	**87,024**	**592**	**147**
K1RTB	"	46,010	430	107
W1ORV	"	41,952	437	96
W1UOP	"	38,388	457	84
W1PLJ	"	504	36	14
W1MRQ/M	"	405	27	15
W2VCZ	A	**223,080**	**1144**	**195**
K2IEG	"	153,990	870	177
W2GKZ	"	4788	126	38
K2HFX	14	**81,900**	**650**	**126**
WA2SFP	"	61,017	473	129
WA2RNM	"	47,190	429	110
K2MGE	"	16,344	227	72
W2QKJ	"	11,394	189	52
K2GXI	7	**14,632**	**236**	**62**
K3UDX	A	**167,162**	**1007**	**166**
W3CJI	"	41,128	388	106
W3JTC	14	**44,928**	**416**	**108**
WA4DCP	14	**16,863**	**219**	**77**
W4RLS	14	15,015	195	77
W4OM	"	14,526		269
W4HA	"	9240		140
W4BVV	7	**6820**		**124**
K5MDX	A	**84,152**		**628**
WA5ALI	"	8640		135
W5AJY	3.5	**616**		**44**
K6EVR	A	**83,790**		**665**
W6YMV	"	22,140		270
WA6IPY	21	**1875**		**75**
K6RWO	14	**43,575**		**415**
K6EXO	"	5670		126
K6HZU/6	"	4484		102
W6UED	"	4292		116
K6AHV	7	**7656**		**132**
K7JCJ	A	**5400**		**90**
W7QPK	14	**9450**		**150**
W8WT	A	**15,549**		**213**
W8CLR	14	**36,358**		**343**
W8BKO	"	31,296		326
K9EAB	A	**61,404**		**476**
WA9ENB	"	22,517		253
W9OKM	14	**20,590**		**290**
K9VVF	"	5280		96
K9ZJV	"	840		35
KØIFL	14	**11,222**		**181**
WØNFA	"	9208		176

Bahamas

VP7CC*	14	**12,096**		**224**

Bermuda

W5JDX/VP9*	14	**35,964**		**444**

Canada

VE1CS*	14	**17,152**		**256**
VE2AMW*	"	**18,720**		**240**
VE2WY	"	14,740		220
VE3PV	A	**13,600**		**170**
VE3BJO	14	**17,472**		**224**

[Continued on page 92]

The Hdqs. Station of the Royal Air Force ARS, using the special call of GB3RAF, topped all other multi-operator stations by a considerable margin. But then look at the group who participated! l. to r., back row: G3ROB, G5UG, F/Lt. Griffiths, secretary of the RAFARS, (seated) G2BVN, and GW3IEQ, ex-VS9APH, VS9KPH. Kneeling: G3GJQ, ex-AP2R and VS9K, N. Griffiths, Jr., and G3HRY.

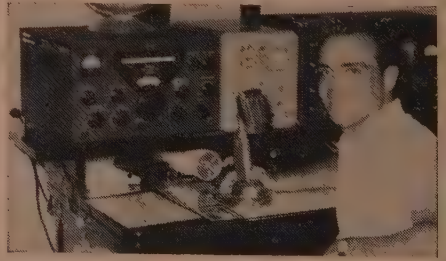

The KØJBK-WØNFA trophy is being made available f the first time to the highest scoring non-U.S.A. stati using under 175 watts p.e.p. A contest newcom T12PI, will have his name engraved on this award whi we hope will be an inspiration to him in future contes

The B&W Model 6100 Transmitter. It is nicely styled with controls conveniently grouped. The three frequency-synthesizer dials are on the black panel in the center. Below these is the door behind which are located the VOX, ALC and CARRIER BALANCE controls. The large knob at the left of the door is the band-selector. The mic and key jacks are at the right with the various function controls.

CQ Reviews:

The B&W Model 6100 Transmitter

It is not often that something radically new is introduced on the amateur equipment market, but Barker & Williamson, Inc., have done just that with their outstanding Model 6100 Transmitter which features a frequency synthesizer, a modern development heretofore used only in commercial and military equipment (a few homebuilt affairs have appeared, but these have been few and far between). This arrangement is an entirely crystal controlled device used in place of a v.f.o. for variable frequency control. It insures better stability than ordinarily experienced with free-running oscillators and it facilitates instant frequency changes with an exceptionally high degree of reset accuracy to any frequency within its range. A more detailed description will be given later.

Besides the frequency synthesizer, the Model 6100 has about everything else one might desire in a piece of equipment of this type. First of all, it is an s.s.b., a.m. and c.w. transmitter capable of at least 100 watts peak output on all bands 80 through 10 meters and on many MARS frequencies. It has numerous fine features as will be seen during the ensuing description.

Circuitry

A block diagram is shown in fig. 1. The microphone signal is applied to a two-stage a.f. amplifier consisting of two triode sections of V_1 which is one of the latest type tubes, a 6C10 triple-triode Compactron. The third triode in V_1 is an a.f. cathode follower which feeds a shunt-connected dual-diode balanced modulator no. 1.

A crystal-controlled carrier signal of 3.2 mc, obtained from V_4, also is applied to the balanced modulator where it is balanced out. The result is a double-sideband suppressed carrier signal at 3.2 mc which is fed into a 3.2 mc upper-sideband crystal lattice filter having a bandwidth of 3 kc. This produces a single-sideband signal at 3.2 mc which is amplified by V_5.

Sideband Switching

A second balanced modulator, using 4 diodes, comes next. Here the signal is mixed with a crystal-controlled oscillator signal of either 6 or

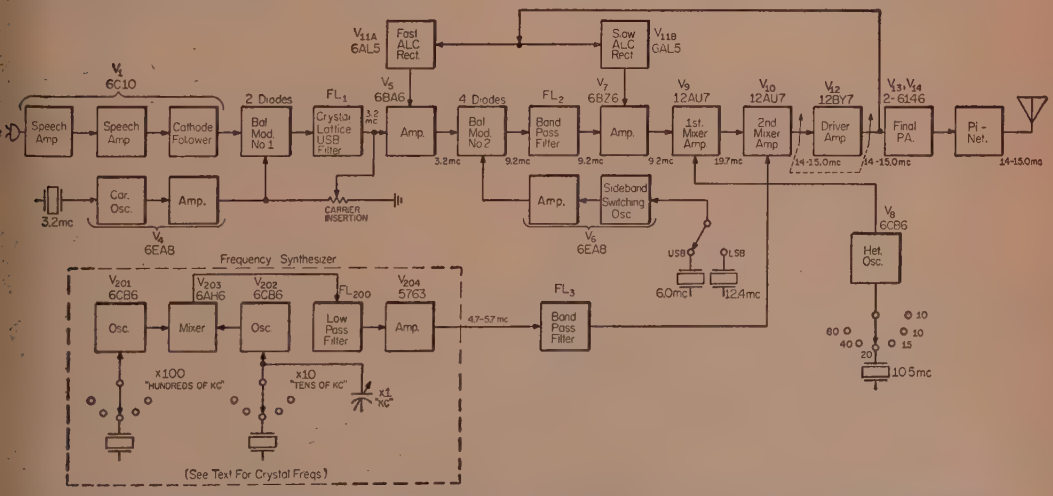

Fig. 1—Block diagram of the B&W 6100 transmitter. Vox circuits are not shown for simplicity. Heterodyne oscillator V_8 shows output for 20 meters only. Crystal frequencies used for other bands are shown in the text.

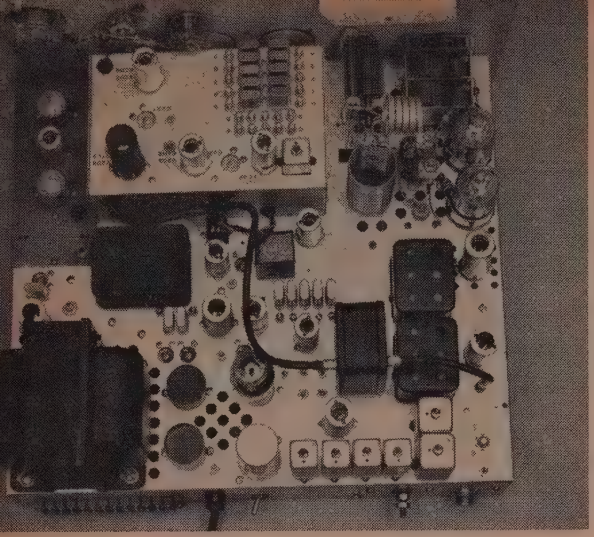

Top chassis view of the B&W Model 6100 Transmitt
The heart of it, a frequency synthesizer is a separ
plug-in module seen next to the panel. The ten 100
step crystals, surrounded with their associated tr
mers, are on top of the unit. The other crystals
inside of the module. A perforated metal cage, wh
is normally secured to the bracket on the panel, h
been removed to obtain a view of the p.a. at the up
right. Note the silver-plated ribbon-type 10-meter hi
efficiency tank coil to the left of the 6146's. The
and speech amplifier stages are at the left of
synthesizer. At the lower left is a husky power tra
former, between which and the synthesizer is
sideband filter. The output cable from the synthesi
is connected to bandpass filter FL_3

12.4 mc, derived from V_6, to produce either an upper or lower sideband signal at a frequency of 9.2 mc.

Switching sidebands at this point has two advantages. One is that only one frequency has to be shifted, rather than two as needed with some systems. The other is that the 3.2 mc carrier can be fixed at the best side of the filter where its skirt can be made steeper for a given cost, thus providing a high degree of unwanted-sideband suppression and better low-frequency a.f. response for producing a more pleasant-sounding voice signal.

The output of the balanced modulator no. 2 is passed through a 9.2 mc band-pass filter which eliminates the possibility of spurious responses, notably the 3rd harmonic of the 3.2 mc s.s.b. signal. A second amplifier, V_7, is then used prior to feeding the signal to the first mixer/amplifier V_9. For 80-meter use this stage operates as a straight-through amplifier on 9.2 mc. For the other bands it combines signals from crystal-controlled oscillator V_8, of 3.5 mc for 40 meters, 10.5 mc for 20, 17.5 mc for 15, 24.5 mc for the lower half of 10 and 25.5 mc for the upper half of 10. The resulting output frequencies from this stage then are: 9.2 mc and the sum-mixtures 12.7, 19.7, 26.7, 33.7 and 34.7 mc for the respective bands.

These frequencies are now applied to the second mixer, V_{10}, together with frequencies in the 4.7 to 5.7 mc range from the frequency synthesizer. Output which is produced from this stage covers the respective amateur bands as follows:

Band	*Signal from V_9 (mc)*		*Signal from Synthesizer (mc)*		*Mixer output (mc)*
80	9.2	minus	5.7-4.7	=	3.5- 4.5
40	12.7	minus	5.7-4.7	=	7.5- 8.0
20	19.7	minus	5.7-4.7	=	14.0-15.0
15	26.7	minus	5.7-4.7	=	21.0-22.0
10	33.7	minus	5.7-4.7	=	28.0-29.0
10	34.7	minus	5.7-4.7	=	29.0-30.0

Driver and Final

A 12BY7 driver/amplifier, V_{12}, which us
high-Q circuits gang-tuned together with tho
of the preceding mixer, pushes a pair of 6146
V_{13} & V_{14}, to a p.e.p. input of 180 watts. T
6146's are a specially selected type to ensu
high output, good linearity and long life. T
output circuit consists of a variable pi-netwo
for matching to resistive loads of from 30
100 ohms. Particular attention has been pa
to this circuit to maintain proper tube-load i
pedance and high efficiency, as is evidenced
the fact that uniform output is obtained on
bands with no drop-off at the higher frequenci
An r.f. choke across the output terminals pr
vides a d.c. path directly to ground in the eve
the d.c. blocking capacitor should break dow
thereby eliminating a potential shock hazard.

Capacitance-bridge type neutralization is us
in the final. The 12BY7 is likewise neutralize
An interesting feature, in this respect, is that
separate neutralizing capacitor for each band
selected with the bandswitch. Stabilization of
12BY7 usually is quite critical, but this arran
ment handles it nicely by maintaining prop
neutralization on each band which might
otherwise be obtained due to changing str
reactances as the tube is bandswitched. "Neutr
izing" jumpers are provided in both stages
disable their B-plus supply lines during neutr
izing adjustments.

Frequency Synthesizer

Now let us take a look at the frequency s
thesizer which is not as complicated as its exc
name suggests. The basic principle is one
hetrodyning a fixed crystal against another cr
tal whose frequency can be varied over a sm
range. Referring to fig. 1, V_{201} and V_{202}
separate crystal oscillators, each having a swi
to select any one of ten crystals which for V
are fixed at 100 kc intervals from 24.7 to 2
mc. Those for V_{202} are spaced 10 kc apart fr
20.01 to 20.1 mc. Each of these may be "r
bered," or shifted downward 10 kc by means
a variable capacitor. The output of the osci
tors is combined in a mixer, V_{203}, to prod

difference-frequencies anywhere from 4.7 to 5.7 mc, depending on the crystal combinations and the variable shift of the 20 mc crystals. Temperature-matched crystals are used to maintain a constant difference-frequency at the mixer output as the equipment temperature varies. The output of the mixer is fed through a three-section low-pass filter, FL_{200}, to eliminate spurious responses, and is then amplified by V_{204} before being applied to the transmitter mixer, V_{10}, through a band-pass filter, FL_3.

A.M. Operation

When a.m. is used, a 3.2 mc carrier from V_4 is reinserted after the sideband filter by means of a variable carrier-level control, thus producing a single-sideband a.m. signal. The control is equipped with a warning light which goes on when carrier is inserted. In the event carrier is inadvertently left on when s.s.b. operation is contemplated, the light brings this situation to the operator's attention. The a.m. carrier input is 45 watts with 180 watts p.e.p.

C.W. Operation

For c.w., carrier is inserted with the carrier-level control for a d.c. input of 180 watts to the final. Grid-bias keying is used on the 2nd mixer and the driver stage. Break-in operation is possible. Key jack is located on the panel.

VOX

Two tubes, a 6C10 Compactron and a 6AL5, make voice-control operation possible with a conventional vox circuit. This includes an anti-trip circuit which prevents loudspeaker signals from actuating the transmitter. All controls for the vox system are accessible from the front panel. Push-to-talk operation also is available.

A.L.C.

The automatic-level control (a.l.c.) system in the Model 6100 is quite unique. An a.l.c. dual-diode detector, V_{11}, is connected to the grid of the final amplifier and conducts only when the r.f. drive exceeds a preset a.l.c. bias potential determined by the a.l.c. threshold control. The detector diodes are connected to separate loads, each of which has a different time constant. Bias potential developed at the slower one (1.5 sec. constant) is applied to V_7 where the gain is held between words, while bias from the faster one (0.03 sec.) is applied to V_5 where the gain follows the rapid variations of each syllable. Thus excellent a.l.c. linearity is maintained and the overall gain is smoothly controlled to limit excitation at the 6146 grids to the pre-set value. The a.l.c. takes hold *before* overloading of the final tubes commences and thus prevents flat topping and resulting distortion.

An innovation with this a.l.c. system is that it allows the final output to be limited to any desired value between 10 and 100 watts, thereby furnishing a convenient means for reducing power during local rag chews, or for use with a linear requiring low drive and to prevent overdriving the linear. The a.l.c. threshold control is accessible for screw-driver adjustment from the front panel and the degree of a.l.c. compression is indicated in db on the panel meter.

Frequency Spotting

A CALIBRATE position is provided to enable the operator to "zero-in" on a received signal without putting a signal on the air with the transmitter. A panel control allows the calibrating level to be adjusted to prevent overloading the receiver and to provide the optimum level for the best beat.

Metering

Besides indicating a.l.c. compression, the panel meter may be switched to read relative output power. This is useful for tune-up to maximum output, for nulling out the carrier and for output monitoring. A sensitivity control is included to set the meter reading to any desired reference point. The meter also may be switched to read total cathode current of the final. There are three separate meter scales, one for each function.

Phone Patch

The Model 6100 is equipped with a separate low-impedance phone-patch input which is available at a terminal strip on the rear apron. High-impedance patch may be used through the microphone input. Vox may be used with either input.

Auxiliary Terminals

Other rear terminals provide up to —100 volts for receiver disabling, anti-trip circuit to receiver output, external push-to-talk control

[*Continued on page 84*]

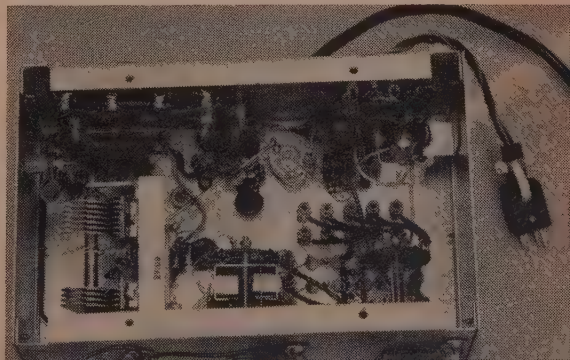

Underside view of the frequency-synthesizer module for the Model 6100. It is easily taken out without necessitating removal of the dials, nor is the calibration altered. At the left is the variable capacitor for "rubbering" each 20 mc crystal over a continuous range of 10 kc. Its dial (×1) is calibrated in one-half kc steps. The ×10 switch is at the center with the ten 20 mc crystals mounted on it. At the right is the ×1000 switch behind which are some of the piston-type trimmers for its 25 mc crystals.

DX DX DX DX D

URBAN LE JEUNE, JR.*, W2DEC

The following certificates were issued between the period from July 6th, 1963 to and including August 5th, 1963:

CW-PHONE WAZ

1824	UA3AN	Vladimir Makarov
1825	K6BWX	R. H. Maddux, M.D.
1826	VS4RS	Ron. L. Skelton
1827	W3GJY	John F. Wojtkiewicz
1828	W9ZB	Robert F. Wilson
1829	JA2AIR	Kazuo Nagata
1830	W6JKJ	Stan Kuhl
1831	OH5TK	Antero Kahra
1832	W1RAN	Ned Raub

TWO-WAY SSB WAZ

169	OH2HN	Altti Unkuri
170	W3NKM	Stanley S. Springer
171	WØTJ	W. M. Atkins
172	UA3DR	Leonid Sharapow

CW WPX

457	SP2HL	Jan Knull
458	KØIAD	Gary Alexander
459	W2LJX	Jim Ortloff
460	OH2VZ	Pertti Kantanen
461	K2UYG	William Schneider, Jr.
462	W3HNI	Charles W. Casselberry
463	G8KU	P. B. Briscombe
464	KP4BEA	Robert B. Roach
465	VK9XK	S. Russ Coleston
466	W9ZB	Robert F. Wilson
467	DL1TA	Dr. Karl-Heinz Birr
468	ZE3JO	Malcolm Geddes
469	VK7SM	Sam G. Moore
470	VK3AXK	S. Russ Coleston

PHONE WPX

95	G3GHE	Charles M. Nairn

SSB WPX

140	W3BVL	William T. Heller
141	G3WW	R. F. G. Thurlow

DURING the recent Malmö, Sweden, conference of the IARU Region I, a proposal brought forward by the Dutch delegation was discussed. This proposal was to limit the use of amateur bands for contests, which are not of an international character, like the WSEM contests of the USSR. The proposal also was discussed with Ernst Krenkel, RAEM, who represented the USSR Radio Club at the Conference. During the past WSEM contest, open only for the U-countries, it was very nice to see that they were only occupying the lower 50 kc of the band, thus leaving space for all others that could not take part in this contest. We wish to thank RAEM and his friends and believe that this is an example of what can be reached at an IARU conference. We should look at some of our *exclusively* U. S. contests in the same lig

*Box 35, Hazlet, New Jersey.

In response to our request for a picture of a DX H for the completion of the DX menagerie, Bob, W9N was kind enough to send in this picture. W9RIL is sho apprehending "DX Hog" W9NN in the woods Northern Wisconsin.

BY1 China: Rumor has it that Leo, UA3C will DXpedition to BY1PK for some s.s.b. op ation. *(Tnx JDXRC)* This sounds too good to true. It reminds me of the most frustrating Q I've ever heard. BY1PK worked BY9SX (th Manchuria, man) in English and signing off w "cheerio."

CR8 Portuguese Timor: Seco, CR8AC, has sumed activity around 14040/50 kc at 1100 1200 GMT. *(Tnx WGDXC)*

DU5 Leyte Island: The Philippine Amat Radio Association will activate this rare pr as DU5DM on October 19 and 20 in comme

WAZ and WPX

The WAZ and WPX certificates are awarded the *CQ* DX department. WAZ is issued for pro of contact with the 40 Zones of the world as show on the official WAZ Zone Map. WAZ is issued three classes, *i.e.* Any mode, all phone and s.s.b. For complete rules, see the January, 19 *CQ*, page 50.

WPX is issued in four classes, *i.e.*, all c.w., phone, all s.s.b. and Mixed. The number of prefix required are: C.w.-300; Phone-300; s.s.b.-200; Mixe 400. For complete rules, see January, 1962 *C* page 52. WAZ applications, Zone Maps and WP applications may be obtained from the DX Edit at the address shown at the head of this colum Please send a self-addressed, stamped envelope a self-addressed envelope and an IRC. All applic tions should be sent directly to the DX Editor.

This photo was taken during the 3rd annual Lake Placid DX Conference on July 14th, 1963. Standing l. to r. W4CKB; HK3EY (Pres. of HK League); K4OBM; Danny Weil, VP2VB; W4DQS; HK1QQ; K4GRD; WA4DDG; Kneeling l. to r. W4BJ; W4LVV; W4QVJ; Naomi Weil; K4WIS; W4BWR. *(Tnx W4CKB).*

oration of Douglas McArthur.

FC Corsica: "Why is it that you didn't get ur QSL from F9UC/FC? Here is the answer. As joint participants in the Hammarlund DXpedition to Corsica, we had the pleasure of visiting Jean, F9UC/FC's shack. There we learned that Jean's home had been destroyed in a storm a few years ago and most of his equipment, logs and cards were destroyed.

"Although the DXpedition rigs had to be kept on the air without interruption, we took time out to search the shack and came up with an old station log which does not show too precise indications of emission type, date, time, freq., etc.

"A batch of QSLs were found in a cardboard box and the ones with s.a.s.e. were answered by the guy who was off duty. Those were mailed July 11, 1963. All other QSLs, about 2,000, without s.a.s.e., will be taken home to DL9PF and answered by a special QSL to be printed shortly. All QSOs still legible in the old log will also be QSLed. These amount to a few thousand 14 mc a.m. QSOs only. The DXCC Manager of ARRL Hq, will be asked to please credit those which, unfortunately, show only the year and the call sign of the station worked. These QSLs will be sent by the Bureau shortly.

"Jack, HB9TL, will handle future QSLs for Pierre, F9RY/FC.

"In the future, DL9PF will act as QSL manager for Jean, F9UC/FC, who promised to send his logs periodically to Walter. F9UC/FC will be on all bands c.w. a.m. s.s.b. from now on." Signed Harry, DL7AH/9Q5AD/LX3AH and Walter, DL9PF/PX1PF/LX3PF.

The above letter speaks for itself.

At the W4CKB orange grove they specialize in raising oranges and antennas. As you can see, they also pick their pickers. Danny Weil, VP2VB, gets some orange juice on its way. *(Tnx W4CKB).*

HS Thailand: Frank, W4LCY, is licensed as HS1P. Frank is with the "Global Ionospheric Research Association" and will oblige with W/K QSOs when and if they become legal. QSL via W4CKB. *(Tnx W4CKB)*

MP4 Trucial Oman: MP4TAD has been active on 14 mc s.s.b.—14300 kc is preferred.

PYØ Trinidade Island: PY1BCR has returned to the Island and is operating as PY1BCR/Ø. 14085 preferred. No civilians are allowed on the Island so the DXpedition plans were scraped. *(Tnx Florida DX Report)*

TL8 Central African Republic: Gus, exFQ8AF/TR2AP is now in TL8-land awaiting his ticket. Gus promises TL8 QSO in quantity. *(Tnx VERON)*

TU2 Ivory Coast: Very active on 14 mc s.s.b. now is "Smitthy" (Frank R. Smith, W8HMI) as TU2AU. He will stay in Abidjan for about two years and will operate s.s.b. on all bands. On 40, he is using a two-element beam. QSLs go via U. S. Embassy, Abidjan. *(Tnx VERON)*

VP8 Falkland Islands: Dave, VP8HJ, has been active on both c.w. and s.s.b. *(Tnx VERON)*

VP8 South Orkneys: Peter, VP8GQ remains active on all bands, c.w. and s.s.b. Peter will operate on 160 meters again this year. *(Tnx VERON)*

VS9P Perram Island: Rumor has VS9PSU active from Perram Island which is a possession of Aden located off the coast of the Malagasy Republic. 15 meter a.m. phone, so the reports say. *(Tnx LIDXC)*

VU2 India: Dady, VU2MD, is one of the better known Indian hams and I thought his story, which appeared in the Northern California *Bulletin* would be of interest.

"I became interested in ham radio way back in 1927 and have been active ever since except for the break during the war years. I am essentially a brass pounder and enjoy key bashing. I am a great believer in the use of low power and efficient antenna system and for years have worked with rigs of 50 watts and less. Up to 1958, all my QSOs were on c.w. and occasionally a.m.; but, since I heard so much about s.s.b., I acquired a CE-20A Exciter and a 458 v.f.o., just to 'keep up with the Jones.' Hi . . . The antenna is a G5RV multiband dipole. (It is not possible to have a quad or a beam in my apartment flat.)



This is the Aruba Ariba award, sponsored by the Aruba A.R.C. See text for requirements.

and the receivers are AR-88 and SX-28. My standby c.w. rig runs an 813 in the final. I am quite proud of my QRP rigs, as I have managed to collect over 75 awards from 30 countries on all six continents. I have worked Gus W4BPD from every spot on the African continent he has touched so far and he has given me quite a few countries. I am, however, still looking out for Idaho, North Dakota and Utah for my WAS, so please tell your friends in these states to look for me on 14050 kc any time after 1530 GMT. The conditions are not good enough for s.s.b. QSOs except during occasional openings."

Where else but California would they print a story about a fellow running 50 watts input to an 813?

ZD7 St. Helena: G3PEU showed up right on schedule as ZD7BW. He will QSL upon his return home about the end of the year.

ZS2MI Marion Island: Jack, ZS1OU, reports via the West Gulf *Bulletin* that Ray, ZS2MI, has a very difficult time with reception due to constant rain, static, etc. Jack mentions that he has received many letters requesting schedules and it is impossible to answer or comply with them. He has induced Ray to spend more time on the air during week days and says he will be on 14058 kc each week day from 1030 to 1145 GMT. He will also be on the low end of 7 mc from 0500 to 0600 GMT week days and on weekends 14058 kc 1300 GMT or earlier with W4ECI acting as MC. ZS2MI's T8C note is easily recognizable.

9X5 Burundi: The new prefix for Burundi is 9X5. Ruwandi will continue to use 9U5.

160 Meters

In spite of the usual decline in 160 meter activity during the summer months when static is a problem, outdoor activities call, and nighttime is shorter, there has been some DX activity on 160.

South Africa—ZS2FM, Mike has continued his tests during ZS winter (W/VE summer) faithfully being on 1901.5 kc every Sunday morning from 0400-0530 GMT. He worked W6ML late in spring and W1BB July 14, 0422-0521 GMT, peaking 569 at 0500. He checks band conditions from our 1950 Loran sigs, also WCC on 2036 kc, a 24 hour commercial station. Much credit is due Mike for arousing interest in 160 in ZS-land. Latest addition is a near neighbor ZE3JO, Mal, who expects to be active this season with a Ranger/HRO.

South Pacific—K1KSH/KG6, Gary, is n operating on 160 from the South Pacific. F conquest was Alex, W6ML, ex-W6KIP, wh he QSOd July 7, 1998 kc, 1225-1248 GMT pe ing 339. W6ML peaked 579; this after two ot unsuccessful skeds. Needless to say, both he a Alex are very happy. W6ML's signals w heard during all schedules very reliably. Ga signals from Globe Scout and "Jury-Rig" tenna at best possible height weren't as good. will be in the South Pacific for several mon expecting to excite 160 DXers by also operat from several other rare prefixes. Keep an open for him this coming season; also any ti now Saturday or Sunday mornings 0830-1 GMT on 1998. He will listen both high and l ends of band.

Northwards/Baffin Island—VE2UQ, Gord had the opportunity and flew there for a w this summer. He decided to test 160 DX from Land of the Midnight Sun even though ant pated QSOs where difficult, if not impossible, to the fact that this time of year it was twili only—no darkness from 0400-0500 GMT. Li enough at midnight to read a newspaper in open. 100 miles south of his QTH a short per of darkness existed from 0403-0515 GMT. Us a Ranger and 260-foot end fed LW anten Gordon operated faithfully every day. Ma W/VEs participated in these tests. On July he QSOd VE1ZZ coming in there peaking and giving Jack a 549 report for his first QS Then, on July 18th, also QSOd W1BB for minutes. VE2UQ/8's signals varied from zero 539 peaks, which proves that QSOs are possi from beyond the Arctic circle. It is wondered it may not have been the very fact of the M night Sun and periods of twilight that made possible at all. Usually Arctic QSOs on 160 considered practically impossible. It is kno that 160 meter signals peak at sunrise and s set and maybe this "continuous" sunset-sun did the trick. Much credit to Jack for opening the North to 160 DX and to more knowledge conditions there on 160. Congratulations. *(T to W1BB for above 160 meter news)*

Corn Islands Kaput

For some time an effort has been qui underway to secure an American call for op ations in the Corn Islands. (Alias, Islas Mistoriosa, April Florida DX *Report*)

The Corn Islands are located off the coast Nicaragua in the Caribbean and have been scribed as a "lush paradise." On U. S. Na Hydrographic Office charts the Corns are de nated as "Leased by the United States." Resea into their status showed a treaty between U. S. and Nicaragua; the Bryan-Chamo Treaty of 1914, wherein, for $3,000,000 ca the U. S. was granted perpetual rights to bu a canal across Nicaragua and also a 99-y lease on the Greater and Lesser Corn Island

Article II of the Treaty states: "It being pressly agreed that the territory hereby lea and the naval base which may be maintai

[*Continued on page 88*]

PROPAGATION

GEORGE JACOBS*, W3ASK

LAST MINUTE FORECAST

The following is a forecast of day-to-day propagation conditions expected during October, 1963. This forecast attempts to predict *specific* days upon which openings shown in the Propagation Charts in this column are most likely to occur, and the expected quality of the openings. For example, the following forecast shows that circuits rated (2) in the Propagation Charts are most likely to open with "good-to-fair" quality (B-C) when conditions are above normal (October 3, 8 and 30), and with "fair-to-poor" quality (C-D) when conditions are expected to be normal. Circuits rated (2) are not expected to open on those days forecast to be disturbed, etc.

PREDICTED PROPAGATION CONDITIONS AND CIRCUIT QUALITY

Prop. Chart Forecast Rating	*Above Normal Days (WWV rating higher than 6)* Oct. 3, 8, 30	*Normal Days (WWV rating 5-6)* Oct. 1-2, 4-5, 7, 9-10, 12, 17-19, 21, 24-29, 31	*Below Normal Days (WWV rating 4)* Oct. 11, 15-16, 20, 23	*Disturbed Days (WWV rating less than 4)* Oct. 6, 13-14, 22
(1)	C	D-E	E	E
(2)	B-C	C-D	D	E
(3)	A-B	B-C	C-D	D-E
(4)	A	A-B	C	D

Where:

A—is an excellent opening with strong steady signals.
B—is a good opening, moderately strong signals, with little fading and noise.
C—is a fair opening, signals fluctuating between moderately strong and weak, with moderate fading and noise.
D—is a poor opening, signals generally weak, with considerable fading and high noise level.
E—is a very poor opening, or none at all.

It looks like Normal propagation conditions for the Contest Period Oct. 26-27.

CQ DX Contest Special

The 1963 *CQ* World Wide DX Contest will be held on the following dates:

Phone Section: October 26-27
CW Section: November 23-24

Continuing the practice of the past twelve years, this month's PROPAGATION column contains DX Propagation Charts prepared for use during the 1963 Contest periods. For those readers interested in statistics, previous predictions appearing in this column for the twenty-four Contest periods held during the past twelve years have achieved a high degree of accuracy 18 times, a fair degree of accuracy 4 times, and missed the mark only twice.

*11307 Clara St., Silver Spring, Md.

Sunspot Cycle

The Swiss Federal Solar Observatory reports monthly mean sunspot numbers of 37 for June and 19 for July, 1963. This results in smoothed sunspot numbers of 30 centered on Dec. '62 and 29 centered on Jan. '63. The sunspot cycle continues to decline at a slow rate. A smoothed sunspot level of 31 was recorded during last year's Contest, and a level of 18 is predicted for the 1963 Contest.

General Forecast

10 Meters: The 10 Meter predictions appearing in the Charts apply mainly to the October 25-27 Contest period, and for the entire month of November. Conditions are expected to be somewhat poorer during the earlier part of October, with openings averaging one numerical rating *lower* than the values shown in the Charts. During the Contest periods a few openings may occur to Africa and South America during the daylight hours, and some openings may also be possible to Australia and the Pacific area during the late afternoon and early evening hours. If propagation conditions are on the high side of "normal" during the Contest periods, openings on 10 meters may be a pleasant surprise to those who can stick it out. If conditions are "below normal" or "disturbed", chances are that the band will be a complete washout.

15 Meters: Although DX openings are expected to be somewhat less frequent than last year, 15 meters should be a good DX band during most of the daylight hours. The band is forecast to open to almost every corner of the world sometime during the period from shortly after dawn through the early evening hours. Signals from Europe and the north and east should peak shortly before noon, while signals from the Far East and the south and west should peak during the afternoon and early evening hours. When conditions are on the high side of "normal", 15 meters may be the best band for DX during the daylight hours; when conditions are "below normal" or "disturbed," openings may be spotty and of short duration.

20 Meters: As during the past few years, 20 meters is again expected to be the "backbone" band during the Contest periods. Good DX openings are expected to many areas of the world

from sunrise through the early evening hours. Conditions are predicted to peak shortly after sunrise and again during the late afternoon and early evening hours. During these peak periods, 20 meters is likely to be the best band for DX. with openings possible to almost all areas of the world, and with signal levels often exceptionally strong. During periods of "below normal" or "disturbed" conditions, 20 meter openings may become spotty and of shorter duration, but in general, the band is expected to hold up in fairly good shape during all but "blackout" conditions.

40 Meters: The band is expected to open for DX during the early evening hours, and remain open to one area of the world or another until shortly after sunrise. During the hours of darkness, 40 meters should be the optimum band for DX openings. Signal levels often are expected to be exceptionally strong on DX openings during periods of "normal" or "above normal" propagation conditions, while the band is likely to be spotty during periods of "below normal" or "disturbed" conditions.

80 Meters: Conditions generally improve on this band as the solar cycle approaches minimum values. Some fairly good 80 meter DX openings are forecast to several areas of the world during the nighttime hours, with signal levels likely to be strong during periods of "normal" or "above normal" or "disturbed" conditions.

160 Meters: The few contest participants who concentrated on 160 meters last year were pleasantly rewarded for their efforts. Conditions on this band also improve as the number of sunspots decreases, and DX openings on this band are expected to be somewhat more numerous than last year. Openings to some areas of the world should be possible during the nighttime hours and the pre-dawn period. Because of low power limitations imposed in this band in many areas of the world, signals will usually be weak and noisy, especially on phone. Openings on 160 meters, while better than last year, will be considerably poorer than the nighttime openings expected on 40 and 80 meters.

CQ WW DX Contest Special
OCTOBER & NOVEMBER, 1963
Time Zone: EST (24-Hour Time)
Eastern USA To:

	10/15 Meters	*20 Meters*	*40 Meters*	*80/160 Meters*
Western & Central Europe	08-13(1)* 07-08(1) 08-10(2) 10-12(3) 12-14(2) 14-16(1)	06-07(1) 07-10(2) 10-12(3) 12-14(4) 14-16(2) 16-18(1)	15-17(1) 17-18(2) 18-23(3) 23-02(2) 02-04(1)	18-20(1) 20-23(3) 23-01(2) 01-03(1) 20-00(1)† 00-02(2)† 02-03(1)†
Eastern Europe & Eastern USSR	08-11(1)* 07-08(1) 08-11(2) 11-13(1)	06-07(1) 07-10(2) 10-16(1)	17-03(1)	19-01(1) 21-01(1)†
Southern Europe & North Africa	08-13(1)* 06-07(1) 07-10(2) 10-12(3) 12-13(2) 13-16(1)	06-07(1) 07-12(2) 12-14(4) 14-16(2) 16-20(1)	15-17(1) 17-19(2) 19-23(3) 23-00(2) 00-03(1)	17-20(1) 20-23(2) 23-01(1) 20-00(1)†
Central & South Africa	07-09(1)* 09-13(2)* 13-16(1)* 06-10(1) 10-12(2) 12-15(3) 15-16(2) 16-18(1)	07-14(1) 14-16(2) 16-18(3) 18-20(2) 20-23(1)	17-19(1) 19-21(1) 21-00(1)	18-21(1) 19-23(1)
Eastern Mediterranean & Arabia	08-11(1)* 07-09(1) 09-11(2) 11-13(1)	07-10(1) 10-14(2) 14-17(1)	19-00(1)	20-23(1)
Central Asia	07-10(1) 17-19(1)	06-07(1) 07-09(2) 09-11(1) 18-21(1)	17-20(1) 05-07(1)	*NIL*
Southeast Asia	09-14(1) 17-19(1)	06-07(1) 07-09(2) 09-15(1) 18-21(1)	17-20(1) 05-07(1)	*NIL*
Far East	17-20(1)	06-07(1) 07-09(2) 09-10(1) 17-21(1)	05-09(1)	*NIL*
Pacific Island & New Zealand	12-18(1)* 07-16(1) 16-19(2) 19-21(1)	17-20(1) 20-02(2) 02-07(1) 07-09(3) 09-11(2) 11-14(1)	00-03(1) 03-07(3) 07-09(1)	03-04(1) 04-07(2) 07-08(1) 05-07(1)
Australia	15-19(1)* 08-11(1) 15-17(1) 17-19(2) 19-21(1)	22-07(1) 07-09(2) 09-18(1)	02-04(1) 04-07(2) 07-09(1)	04-05(1) 05-07(2) 07-08(1) 05-07(1)
South America	07-09(1)* 09-14(2)* 14-17(1)* 06-08(1) 08-10(3) 10-14(2) 14-16(4) 16-18(2) 18-21(1)	14-16(2) 16-17(3) 17-20(4) 20-00(3) 00-02(2) 02-06(1) 06-08(2) 08-14(1)	18-19(1) 19-20(2) 20-03(3) 03-06(1)	19-20(1) 20-03(2) 03-06(1) 01-04(1)
McMurdo Sound, Antarctica	06-07(1) 07-09(2) 09-11(1) 17-19(1)	18-20(1) 20-00(2) 00-07(1) 07-09(2) 09-11(1)	00-06(1)	*NIL*

Time Zones: CST & MST (24-Hour Time)
Central USA To:

	10/15 Meters	*20 Meters*	*40 Meters*	*80/160 Meters*
Western & Central Europe	08-11(1)* 07-09(1) 09-11(2) 11-14(1)	07-09(1) 09-11(2) 11-13(3) 13-15(2) 15-17(1)	17-19(1) 19-01(2) 01-03(1)	18-20(1 20-22(2 22-01(1 21-00(1
Eastern Europe & European USSR	08-12(1)	06-08(1) 08-11(2) 11-15(1)	18-01(1)	20-23(1 21-23(1
Southern Europe & North Africa	08-12(1)* 06-08(1) 08-09(2) 09-11(3) 11-12(2) 12-14(1)	06-07(1) 07-11(2) 11-13(3) 13-15(2) 15-18(1)	16-18(1) 18-20(2) 20-22(3) 22-00(2) 00-03(1)	18-20(1 20-22(2 22-01(1 20-22(1
Central & Southern Africa	08-10(1)* 10-13(2)* 13-16(1)* 07-09(1) 09-12(2) 12-15(3) 15-17(2) 17-18(1)	07-14(1) 14-16(2) 16-18(3) 18-20(2) 20-23(1)	18-20(1) 20-22(2) 22-23(1)	20-22(1 20-22(1
Eastern Mediterranean & Arabia	07-12(1)	06-08(1) 08-11(2) 11-16(1)	19-23(1)	20-22(1
Central Asia	07-10(1) 18-21(1)	06-07(1) 07-09(2) 09-11(1) 17-19(1) 19-21(2) 21-22(1)	05-08(1) 17-19(1)	*NIL*

Southeast Asia	08-10(1) 10-13(2) 13-17(1) 17-19(2) 19-21(1)	06-07(1) 07-09(2) 09-14(1) 21-23(1)	05-08(1) 17-19(1)	*NIL*
Far East	16-19(1)* 15-16(1) 16-10(2) 19-20(1)	06-07(1) 07-09(2) 09-11(1) 16-19(1) 19-21(2) 21-22(1)	03-09(1)	04-07(1)
Pacific Islands & New Zealand	12-19(1)* 07-10(1) 10-13(2) 13-16(1) 16-18(3) 18-20(2) 20-22(1)	17-19(1) 19-20(2) 20-22(3) 22-00(2) 00-06(1) 06-09(2) 09-14(1)	23-01(1) 01-06(3) 06-07(2) 07-09(1)	00-03(1) 03-06(2) 06-07(1) 03-07(1)†
Australia	14-17(1)* 07-08(1) 08-10(2) 10-14(1) 14-18(2) 18-21(1)	00-07(1) 07-09(3) 09-11(2) 11-17(1) 20-22(1) 22-00(2)	03-04(1) 04-07(2) 07-09(1)	04-05(1) 05-07(2) 07-08(1) 05-07(1)†
South America	07-09(1)* 09-14(2)* 14-17(1)* 06-08(1) 08-10(3) 10-14(2) 14-16(4) 16-18(2) 18-20(1)	14-17(2) 17-19(4) 19-00(3) 00-02(2) 02-05(1) 05-07(2) 07-14(1)	18-19(1) 19-20(2) 20-03(3) 03-06(1)	19-20(1) 20-22(2) 22-00(1) 00-02(2) 02-06(1) 00-04(1)†
McMurdo Sound, Antarctica	06-07(1) 07-09(2) 09-11(1) 16-18(1)	18-20(1) 20-00(2) 00-06(1) 06-08(2) 08-11(1)	23-07(1)	*NIL*

Time Zone: PST (24-Hour Time)

WESTERN USA To:

	10/15 Meters	*20 Meters*	*40 Meters*	*80/160 Meters*
Western & Central Europe	06-07(1) 07-10(2) 10-12(1)	05-06(1) 06-08(2) 08-10(1) 10-12(2) 12-14(1) 21-23(1)	19-00(1)	19-23(1)
Eastern Europe & European USSR	07-10(1)	06-07(1) 07-09(2) 09-14(1) 21-23(1)	21-00(1)	*NIL*
Southern Europe & North Africa	06-07(1) 07-10(2) 10-13(1)	06-09(1) 09-12(2) 12-14(1) 21-23(1)	18-23(1)	18-22(1) 18-20(1)†
Eastern Mediterranean & Arabia	07-10(1)	06-07(1) 07-09(2) 09-12(1)	18-22(1)	*NIL*
Central & South Africa	07-09(1)* 09-11(2)* 11-13(1)* 06-10(1) 10-12(2) 12-14(3) 14-15(2) 15-16(1)	10-13(1) 13-15(2) 15-17(3) 17-19(2) 19-23(1)	16-17(1) 17-19(2) 19-21(1)	17-19(1) 17-19(1)†
Central Asia	17-19(1)	07-09(1) 17-21(1)	06-09(1)	*NIL*
Southeast Asia	09-11(1)* 15-18(1)* 08-09(1) 09-12(2) 12-15(1) 15-17(2) 17-20(1)	07-08(1) 08-10(2) 10-14(1) 18-23(1)	03-05(1) 05-07(2) 07-09(1)	05-07(1)
Far East	14-16(1)* 12-14(1) 14-17(3) 17-18(2) 18-20(1)	07-12(1) 12-14(2) 14-16(1) 16-18(3) 18-20(2) 20-22(1)	22-00(1) 00-02(2) 02-06(3) 06-08(2) 08-09(1)	23-01(1) 01-05(2) 05-07(1) 01-06(1)†
Pacific Islands & New Zealand	09-11(1)* 11-17(2)* 17-19(1)* 08-09(1) 09-12(3) 12-16(2)	06-08(1) 08-10(3) 10-12(2) 12-17(1) 17-19(2) 19-21(4)	21-22(1) 22-05(3) 05-07(2) 07-09(1)	22-00(1) 00-05(2) 05-07(1) 02-06(1)†
Pacific Islands (cont.)	16-19(4) 19-20(2) 20-22(1)	21-23(3) 23-00(2) 00-03(1)		
Australia	12-19(1)* 07-08(1) 08-13(2) 13-16(1) 16-19(2) 19-21(1)	06-08(1) 08-10(3) 10-12(2) 12-20(1) 20-22(2) 22-03(1)	01-03(1) 03-06(3) 06-09(1)	03-04(1) 04-06(2) 06-08(1) 04-07(1)†
South America	07-08(1)* 08-13(2)* 13-16(1)* 05-07(1) 07-12(2) 12-14(3) 14-16(4) 16-17(2) 17-19(1)	14-16(2) 16-18(4) 18-20(3) 20-00(2) 00-05(1) 05-07(2) 07-14(1)	18-19(1) 19-01(3) 01-05(1)	19-22(1) 22-01(2) 01-04(1) 23-02(1)†
McMurdo Sound, Antarctica	06-07(1) 07-09(2) 09-11(1) 16-18(1)	16-18(1) 18-20(2) 20-22(3) 22-02(2) 02-06(1) 06-08(2) 08-11(1)	23-06(1)	*NIL*

Propagation Charts

The numerical ratings appearing in parenthesis following each predicted time of band opening in the Charts, indicate the *total* number of days during each month (October & November) that the opening is expected to occur. The rating (1) means that the opening should occur on less than 7 days; (2) the opening should occur between 8 and 13 days; (3) between 14 and 22 days, and (4) on more than 22 days.

To determine the *specific* day that an opening is most likely to take place, refer next to the "Last Minute Forecast" which appears at the beginning of this column. This forecast is inserted in the column just as *CQ* goes to press and is based on the latest available propagation data. The forecast attempts to predict specific days upon which openings shown in the Propagation Charts are most likely to occur, and the expected signals, noise and fading levels. For example, an opening rated (2) in the Propagation Charts is likely to take place with moderately strong signals and little fading or noise on days shown in the "Last Minute Forecast" as "above normal;" openings are expected to fluctuate between weak and strong, with moderate fading and noise on days predicted to be "normal;" and generally weak signals, with considerable fading and noise can be expected on days shown as "below normal." Openings rated (2) in the forecast are not expected to take place during "disturbed" conditions.

The sequence to follow in using the Propagation data appearing in this column is:

1. Check the appropriate Propagation Chart (Eastern, Central or Western USA, depending on your QTH) for the predicted times of opening for the particular band or circuit that you are interested in;
2. Check the numerical rating appearing in the parenthesis following the predicted band opening against the quality figures appearing in the "Last Minute Forecast" for October 26 and 27, in order to determine likely signal, noise and fading levels for the predicted opening. (Check the "Last Minute Forecast" which will appear in next month's column for tht November 23-24 Contest period).

This month's special Charts are based upon the following *effective radiated powers* at an-

[*Continued on page 96*]

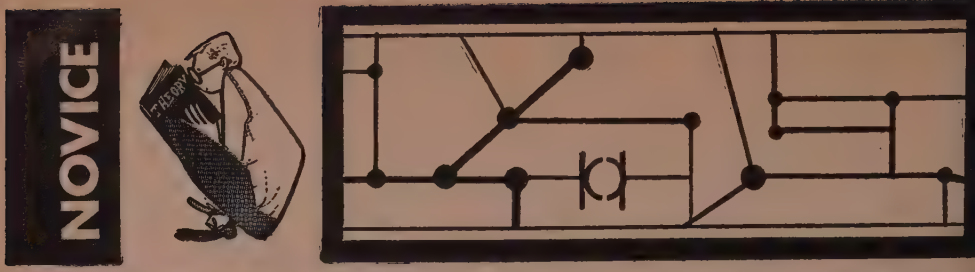

WALTER G. BURDINE*, W8ZCV

A FEW days ago I was asked to give a test to a man that was blind. This naturally presented quite a problem as I had been around the blind very little and had no idea of their methods of writing and reading. I wrote the FCC for the instructions and right back came a set of examinations and a letter telling me how to proceed with the test. I know a lot of you are unfamiliar with the methods of testing the handicapped and I think you might be as interested as I was. The contents of the letter are as follows:

Instructions for Blind Applicants for Amateur Radio Licenses General Class

"APPOINTMENT: Because blind applicants require special attention and cannot take the code tests or written examinations in the manner indicated below while others are in the room, it is required that prior appointment be made. At the Detroit office, where amateurs are examined on Wednesday and Friday mornings, it is usually required that the blind applicants appear by appointment at 1:00 P.M. on one of these days. At examination centers away from the field office, appointment can be made for 1:30 P.M., a half hour before the scheduled General Class examination.

"ASSISTANT: The examiner will not be available to read the questions to the applicant, especially at field examinations. It is therefore required that the applicant be accompanied by a person, preferably a nonamateur, who can read the questions and record the selected answers.

"CODE TESTS: Blind applicants have copied the code test in many ways. In most cases the applicant dictates the words or letters to the examiner who records them as dictated. A few applicants have been able to use a standard typewriter. If this method is used, the applicant must bring his own typewriter. Some applicants use a Braille typewriter and read back the copy to the examiner. Only a few have copied the code test with a Braille slate and if this method is used it is recommended that two or three slates be brought to clamp to the paper before the test starts, to avoid delays in shifting the slate position. Sending tests are conducted in the usual manner except that dictated material is sent.

"WRITTEN TESTS: The person accompanying the applicant reads the questions to him, one a time, and reads the five multiple-choi answers. The applicant decides which is the co rect answer and indicates the correct answer his assistant who records it on the IBM shee

Novice, Technician, and Conditional

"Examinations by mail for Novice, Techn cian and Conditional classes can be conducte by voluntary examiners in a manner similar the above. Examiners are cautioned against ai ing the applicant through the use of their ow knowledge of the theory and regulations.

Physical Handicaps other than Blindness

"Persons who have physical handicaps oth than blindness, which prevent copying the cod or recording the written tests may also be e amined by appointment. Tests will be conducte in a manner which appears best suited for t particular individual."

That is the text of the letter sent to me by t Detroit field office and I presume the same done at all examining centers. I will add th every precaution should be taken to prevent a help to the applicant when giving the test a possibly making the applicant feel that cheated while taking the test. Don't forget th the applicant would like to stand on his ov two feet so to speak, he doesn't want help

[*Continued on page 99*]

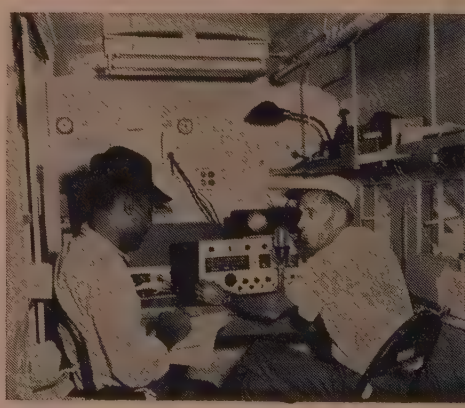

Hosie Edwards, K8VER and Vernon Harris, WA8C at the controls of the DESC field day six meter stati The shack is a surplus truck cab. It was hot in the I know, I used one tool

*R.F.D. 3, Waynesville, Ohio.

SPACE COMMUNICATIONS

GEORGE JACOBS*, W3ASK

A high-level international radio conference on space communications will begin in Geneva, Switzerland on October 7th. Being held under the auspices of the International Telecommunication Union, the conference is scheduled to remain in session for a five-week period. The conference, the first of its kind to be held in the field of space communications, is expected to be one of the most important held in the nearly 100-year history of the ITU.

The main purpose of the conference will be to allocate radio spectrum for space activities and radio astronomy. It will be the first conference in the general area of space to be held on such a broad international level, and hundreds of scientists, engineers and government officials from a large number of the 120 member nations of the ITU are expected to attend.

The official name of the conference is the "Extraordinary Administrative Radio Conference to Allocate Frequency Bands for Space Radiocommunication Purposes." The results of the conference, from the standpoint of the International Radio Regulations, which it is authorized to revise, are expected to have far-reaching effects on the practical utilization of space during the next ten or fifteen years. The Radio Regulations is the basic ITU document governing the worldwide operation of radio.

This past summer, the Federal Communications Commission released to the public the U.S. frequency proposals that will be considered at the space conference. These include the proposed allocation of a total of approximately 3,000 mc of the radio spectrum to meet the expected frequency requirements of future operational satellite systems, and for space research and exploration. The U.S. proposes allocations for communication, meteorological and precision navigational satellite systems, as well as for experimental earth satellites, space probes intended for scientific exploration of the moon, various planets, and the solar system, and for manned space-flight. Also included in the U.S. proposals are frequency allocations for such supporting communication functions as telecommand, telemetering and tracking, as well as radio astronomy. The proposals also contain a recommendation concerning direct broadcasting satellites.

Except for narrow bands for space research between 10,003—10,005 kc, 19,990—20,010 kc and 39,986—40,002 kc all of the frequency bands proposed by the U.S. are in the v.h.f., u.h.f., and s.h.f. range up to 33,500 *megacycles*, or 33.5 *gigacycles*. In order to keep dislocation in the radio spectrum to a minimum, almost all of the U.S. proposed allocations are to be shared with existing terrestrial radio systems, although some exclusive bands are being requested for space research, telecommand and telemetry where absolute freedom from interference is necessary.

The Geneva space conference has aroused considerable interest, not only in technical circles, but also in the United Nations. The UN

*11307 Clara St., Spring, Md.

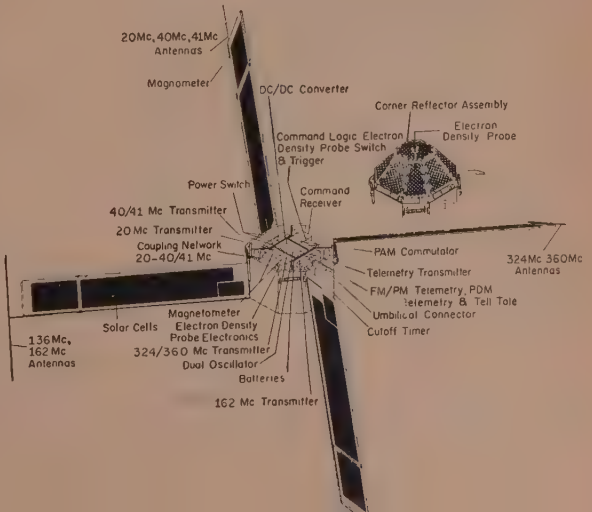

Fig. 1—Cutaway view of S-66 Ionospheric Beacon Satellite which NASA planned to launch during late September. The satellite will radiate signals on seven frequencies for ionospheric investigation. The relatively simple receiving equipment necessary for measuring signal strength, Doppler shift and Faraday rotation make this program a natural for amateur radio participation. *(Official NASA Photo).*

General Assembly last December recommended that the conference consider those aspects of space communication in which international cooperation will be required. More recently the UN Economic and Social Council stressed the importance of the conference with reference to peaceful uses of outer space and urged all member-nations to participate.

None of the U.S. frequency proposals deal with bands allocated to radio amateurs. Amateur radio is an *experimental* service, and space communication projects planned by radio amateurs, such as OSCAR, will take place in bands already allocated to amateur radio on a worldwide basis. For these reasons, it seems unlikely that radio amateur frequency bands will come up for much discussion at the conference. The results of the conference, however, will be of considerable interest to "space-listeners," since the frequency bands that will be used on all future satellites and space probes will be decided in Geneva during the next few weeks. These results will be reported in this column as soon as they are known.

S-66 Ionosphere Satellite

If all goes according to plan, by the time this appears in print, America's S-66 research satellite should be probing the secrets of the ionosphere. Scheduled to be launched during late September from the Pacific Missile Range (Point Arguello, California), S-66 will be to long-distant communications what the TIROS satellite is to weather. Surveying the ionosphere on a global basis, S-66 is expected to send back to earth data for predicting radio propagation conditions and for charting the ionosphere and radio storms in much the same manner that data from TIROS satellites are used for world-wide weather forecasting. As radio amateurs know from first-hand experience, the ionosphere is subject to as rapid, and sometimes as dramatic, changes as the weather.

The ionosphere is a region of electrically charged gases beginning about 35 miles above the surface of the earth and extending hundreds of miles into space. The electrification in this region is responsible for bending high frequency radio signals back to earth over great distances.

The ionosphere is believed to be produced by ultraviolet and X-rays emitted from the sun. The degree of electrification varies hourly, daily, seasonally, geographically and over an 11-year cycle related to sunspots. Often violent electronic storms, believed to originate on the sun, cause the ionosphere to "break-up", or disappear in some areas of the world for periods ranging from a few hours to several days. During such storms, high frequency radio communication becomes very difficult to maintain, or may black out entirely.

During the past 40 years the nature of the ionosphere has been studied extensively by the use of radio pulsing techniques. Ionospheric measuring stations, located at more than 100 different points throughout the world, probe the ionosphere with sweep-frequency radio pulse every hour, or more frequently. With the adven of the space age, sounding rockets and suc satellites as EXPLORER VIII, ARIEL I, an ALOUETTE have studied the ionosphere i greater detail. Although much is known presentl about the ionosphere, it seems, in fact, tha new puzzles sprout for each one that is solve S-66, or the Ionospheric Beacon Satellite, as it officially called, represents a new and more ad vanced assault upon the complexities of th ionosphere on a global basis. The satellite primary objective will be to conduct measure ments which will allow scientists to plot th form and structure of the ionosphere more ac curately than previously possible. It is expecte that the results obtained from the S-66 proje will lead to a better understanding of the re lationship that exists between solar activity, th ionosphere, and long distant radio communica tions.

S-66 Orbit and Frequencies

NASA will attempt to place S-66 into a nea circular polar orbit, inclined 80 degrees to th equator, at an altitude of about 600 miles. I such an orbit, the earth will rotate under th satellite thus permitting S-66 to view each are of the earth's ionosphere every 24 hours. Th satellite is expected to have a period of 10 minutes and a radio life of about three year

The satellite will radiate signals on the follow ing *seven* frequencies. Passing through th ionosphere, these signals will provide groun observers with a means for measuring and com paring Doppler shifts and Faraday rotation From such measurements, scientists will be ab to deduce the structure and form of th ionosphere with great accuracy.

Freq. (mc)	*Power* (Watts)	*Purpose*
20.005	0.25	Continuous radiation of c.w. beacon f ionospheric measurements.
40.010	0.25	" " "
41.010	0.25	" " "
136.170	0.40	Continuous radiation of c.w. tracki beacon and realtime pulsed telemet
162.000	0.10	Continuous radiation of Doppler tra mitter.
324.000	0.10	" " "
360.090	0.10	Continuous radiation of c.w. beacon f ionospheric measurements.

All signals radiated by the spacecraft a commanded on-off by ground control.

The S-66 spacecraft is octagonal-shaped an weighs about 120 pounds. Four blades cover with solar cells convert the sun's energy in electricity to recharge the satellite's nickel-ca mium batteries. Two 5-foot whip antennas an two dipole antennas extend from the opposi blades. The whip antenna for the satellite command receiver extends from the bottom the satellite. For more details of S-66's appea ance see fig. 1.

S-66 Participation

Widespread participation in the S-66 proje is anticipated since the satellite's polar orbit w

[*Continued on page 100*]

the USA-CA PROGRAM

CLIF EVANS*, K6BX

SIXTEEN USA-CA-500 and one USA-CA-1000 awards were mailed to July winners as shown below.

USA-CA HONOR ROLL

500

WØPLN 242	HK3LX 247	WA6GWM 253
K2BFU 243	K5LWL 248	K6PQY 254
W5CME 244	K6YVV 249	WA6CRN 255
W8HWX 245	K6CJF 250	HK3RQ 256
OK3EA 246	K9ZXG 251	HK7ZT 257
	K3BTT 252	

1000

W6YC 10	VE3BKL 12	K5UYF 13
WØMCX 11		W1GKJ 14

Of the sixteen USA-CA-500 awards, there were two endorsements for all phone, eight for all c.w., and six for mixed operations.

We goofed: . . . back in May issue we listed W6YC correctly as USA-CA-1000 10; we later erroneously listed W1GKJ as 10; our apologies to W1GKJ to whom we assign 14 as only corrective solution to our goof.

Seeing OK3EA on list above reminds us he just came in following Helmut, DL1QT, for CHC-200 Top Honors, and both become eligible for the Arne Trossman CHC-200 Top Honors Plaque. Harry, OK3EA, 31, doctor, pediatrician, was a s.w.l. from 1948-54, and club station operator 1950-54, getting his ticket in 1954. Yes, he's single and says his hobbies still are hunting for DX and awards.

Japan YLs Seek More Contacts

Word from Emiko Ito, JA1CFS, says Japanese YLs are highly active on 3.5 and 7 mc. She suggests that U.S. hams try calling "CQ JA/YL" especially on 7 mc. She is Custodian for the work 10 JA YLs award, YL-10, and reports sixteen have been issued to date in following sequence: WA6IVM, W6ETR, W8IEC, K4GLA, UA6LF, OH2BAD, W9KA, W1YPH, W6FGJ, HM1AP, OH6AA, HA5AM, HA5FQ, W8NAN, K6EIE and SP6FZ.

USA-CA Program and Rules

Many folks just getting introduced to the USA-CA Program or just awakening into realization of its many outlets of hamdom participation, write asking why we don't print the full details of the program more often. Appreciate the interest; however, space only permits such publication along with complete Honor Roll once a year and we have picked November as the month.

Full information covering the USA-CA Program may be obtained from K6BX for s.a.s.e. What we send are pages from the *Directory of Certificates and Awards*, and feel free to ask for literature on other *CQ* awards too.

Speaking of USA-CA Rules, we still get considerable correspondence asking how to figure out county credit for independent cities. This amazes us because the rules plainly state that you may claim any *one* county adjacent to an independent city, and such concrete words are not subject to interpretation.

The question has been raised if aeronautical-mobile contacts count for USA-CA. Absolutely . . . same as for mobile so long as the QSL card names either the county flown over at time of contact or names city or town flown over. Don't tell me some of you folks are planning aeronautical-mobile county expeditions?

Several letters have been received lately asking if Maritime Mobile contacts with ships, vessels or boats tied up at docks count for the county in which berthed. Yes . . . and let's take it even further; USA-CA recognizes the fact of international law that a ship within the 3-mile limit

Four famous DXers get mugged at the EXIT door during recent N.Z.A.R.T. Convention held "Down Under." Left to right are: ZL2AFZ, ZL2GX, ZL1APM and ZL1TB. The "Old Dominion Award" for working state of Virginia counties. See text for qualifications.

*United States of America Counties Award Custodian, Box 385, Bonita, California.

Can't always go by the name; here is the "Junk Hunters" certificate for working members; Ohio stations work eight and stations outside Ohio work four members. All contacts must be QSLed. No charge. Send log data and s.a.s.e. to W8IJW, Sect'y, Junk Hunters Club, 1293 Chelton Dr., Kent, Ohio. Even though you may already be just a junk hunter, when you win this certificate you become one of "the" Junk Hunters. Bonafide "Junk Hunters" are K6BX (we worked 18 of those listed) K8BRW, CEN, EUX, KKG, KTG, OPL, QLT, RSC, RUD, SEZ, VMY, YYK, ZCC, ZEV, ZGZ, ZSY; W8AJW, CHA, EFB, EPM, FKU, IJW, JZZ; WA8AYL, BBG, CAX, CYX, DRX, DKM, EEP, EMW, FRK, FZF, GBW, GED, GGP.

is also in territorial waters of an adjacent county.

New Bargain P.O.D. Nr. 26

As you know, we recommend the Post Office Department's Directory Nr. 26 as best source of information to determine the county QTH of any designated contact. Also, as you know, the Post Office Department has recently come out with a new ZIP number code for *all* post offices. Well . . . the P.O.D. in implementing the new program has come up with a tremendous new July, 1963 issue of P.O.D. Nr. 26, a giant size 8½ × 11" book of 572 pages weighing two pounds for the regular price of $2.50.

Besides the county identity data, this new Directory contains a wealth of cross-indexed information which should be in the library of all amateurs and s.w.l.s. Here's what it contains: (A) A list of postal delivery zone offices. (B) A list of all post offices, branch post offices, and stations arranged alphabetically by states. (C) An alphabetical list of all post offices (cities and towns) branch post offices and named stations. (D) A list of the number of post offices



It's not too late to win the City of Red Deer Golden Jubilee Award (1963) for contacting Central Alberta Radio League members; British Columbia, Alberta and Saskatachewan work 10 members; rest of Canada, N.W.T., and U.S.A. work 5; DX, including KH6 work 3; locals work 15. C.A.R.L. Club station VE6QE counts as 2 contacts. Send copy of complete log data with verification by one other licensed amateur to E. S. Hall, VE6PZ, 5406-38 St., Red Deer, Alta., Canada. No charge.

by classes, in each state and territory as of Ju 1, 1963. (E) A list of post offices by states a counties. (F) A list of Army posts, camps, a stations and Air Force bases, fields and instal tions. (G) A list of post offices that have be discontinued or had their names changed duri the past two years. (H) A list of ZIP (Zo Improvement Plan) Code numbers.

To get this outstanding book value, send $2. to the Supt. of Documents, Gov't. Printing Offi Washington, D.C. 20402, and ask for the Dir tory of Post Offices, catalog No. P. 1.10/4:9 July, 1963 issue. New, revised issues are availa each July.

P.O.D. 26 Good Will Program

As you know, the USA-CA Program condu a double-barreled good-will program to ass our DX friends identify the county of cont when U.S. hams have failed to provide such formation on QSL cards. One phase of the go will action is for U.S. hams to send expired a replaced P.O.D. 26 books to DXers who have dicated desire for such gifts, and second pha is the listing in this column those amateurs whom DXers may write (send s.a.s.e.) aski help in identifying U.S. counties.



The "Old Dominion Award" for working state Virginia counties. See text for qualifications.

Some time back we explained that each Ju all U.S. Post Offices are provided numbers P.O.D. 26 depending on size of P.O. a branches served. As a normal action, the P then destroys the expired copies; however, ma Post Masters, when appropriately informed the Amateur Radio P.O.D. 26 Good Will P gram, are glad to make these expired cop available to responsible amateurs and clubs purpose of sending to DXers.

Several folks have written that their P Masters have refused to cooperate saying th had no authority to release the books. In t connection all we can say is that such decis and action is a proper responsibility of ea Post Master and a matter of his interpretat of the purpose for which the books are to used. We suggest that Post Masters not be proached by individuals as such, but rather organized clubs. The fact remains that for ev Post Master who feels he hasn't the autho to release these expired books to the Good W Program, a dozen others cooperate. As exam in one major Texas community the Alamo Y and the San Antonio Radio Club obtained fo expired copies of P.O.D. 26 which are now

[*Continued on page 102*]

CONTEST CALENDAR

FRANK ANZALONE*, W1WY

CALENDAR OF EVENTS

September	28-29	MARC VE/W
October	5-6	Oceania Phone
October	12-13	Oceania C.W.
October	12-14	ARRL CD C.W.
October	19-21	ARRL CD Phone
October	19-20	RSGB 7 Mc Phone
October	23-24	YL/AP C.W.
October	26-27	*CQ* WW DX Phone
November	2-3	RSGB 7 Mc C.W.
November	6-7	YL/AP Phone
November	9-11	ARRL SS
November	16-18	ARRL SS
November	16-17	RSGB 21/28 Phone
November	23-24	*CQ* WW DX C.W.
December	7-8	OK DX C.W.
December	14-16	Virginia Party

MARC VE/W

Starts: 1800 EST Saturday, September 28
Ends: 2400 EST Sunday, September 29

This is strictly a Canadian/U.S. party, a fine little contest as long as the supply of VEs hold out. The W/Ks usually run out of VE contacts the second day of the contest and activity bogs down. If the boys across the border would stir up a little more activity it would be a lot more interesting.

Rules are same as in previous years except for a slight change in the multiplier; VEØ is now considered as a separate multiplier. Better check rules in last month's CALENDAR.

This year your logs go to: Gordon H. Webster, VE2BB, 1550 Erin Place, Dorval, Quebec, Canada.

Oceania DX

Phone

Starts: 1000 GMT Saturday, October 5
Ends: 1000 GMT Sunday, October 6

C.W.

Starts: 1000 GMT Saturday, October 12
Ends: 1000 GMT Sunday, October 13

This is a joint activity by the two national amateur organizations of Australia and New Zealand, the WIA and NZART. It's the old VK/ZL contest with an expanded format for the second year.

It's the world working VK/ZL and Oceania stations on all bands. The contest is in three sections; (A) phone; (B) c.w.; and (C) *Receiving*, both c.w. and phone.

The following scoring rules apply to all stations other than VK/ZLs.

1. The usual five and six figure serial number, RS/RST report plus three figures which may begin with any number between 001 and 100 for the first contact, and increase by one for each successive contact. (A good gimmick, keeps the competition guessing).

2. For Oceania stations, each contact with a VK/ZL counts 2 points; stations in the rest of the world, 1 point.

3. For the rest of the world, each contact with a VK/ZL counts 2 points; with Oceania stations other than VK/ZL, 1 point. One contact per band with the same station is permitted.

4. The multiplier is determined by the sum of VK/ZL call areas worked on each band.

5. Logs should show in this order: date, time, in GMT, station worked, band, serial number sent and received, QSO points. Underline each new VK/ZL call area worked on all bands and use a separate log for each band.

6. Also a summary sheet to show: your call, name and address in BLOCK letters, total score by showing total points for all bands and sum of VK/ZL call areas worked on all bands. (This is not clear to me; is the final score the sum of QSO points and different VK/ZL call areas, or are the QSO points multiplied by the VK/ZL call areas? Usual procedure would indicate that the latter is correct.)

Details of your equipment and other comments are also desirable. Last but not least, sign the usual declaration that all rules and regulations have been observed.

7. Certificates will be awarded to each country and call areas in W/K, JA, SM, UA on the following basis; (a) Top scorer on all bands; (b) Top scorers on individual bands. The minimum contact requirements to be determined by prevailing conditions and activity.

There is also a listener's section for s.w.l. members. Logging is the same as indicated for transmitting stations. Log must show not only the call of the station heard but the call of the station he is working and the serial number sent by the station heard.

Overseas listeners may only log VK and ZL stations.

*14 Sherwood Road, Stamford, Conn. 06905

Your logs must be in the hands of the WIA, Federal Contest Committee, Box 638J, G.P.O., Brisbane, Australia, no later than January 19, 1964.

R.S.G.B. 7 Mc

Phone

Starts: 0001 GMT Saturday, October 19
Ends: 2359 GMT Sunday, October 20

C.W.

Starts: 0001 GMT Saturday, November 2
Ends: 2359 GMT Sunday, November 3

It's the world working the British Isles in this one. Submit your log for all your contest operation on 7 mc but select any continuous 24 hour period for scoring.

1. Contacts must be made in that portion of the 7 mc band for which the entrant is licensed. In the phone section, operation below 7050 kc is prohibited. And only one contact per station of course.

2. The usual five and six figure serial numbers, RS/RST report plus a progressive contact number starting with 001.

3. Each contact with a British Isles station counts 5 points. An additional 50 bonus points can be claimed for the first contact with each country-numeral prefix. *i.e.*, G2, G3, GB, GC3, etc., 37 in all. A further 50 bonus points can also be claimed for every ten stations worked in each call-sign series.

4. Your final score therefore will be the sum of QSO points and bonus points; no multiplier.

5. Log sheets should be columned and show in this order: date, time, in GMT, station worked, serial number sent and received, blank column, bonus points and points claimed.

6. Each entry should also include a summary sheet with your call, name and address in BLOCK letters, claimed score and other pertinent information. And don't forget the usual signed declaration that all rules and regulations have been observed.

7. Certificates will be awarded to the leading station in each overseas country and following call areas; UA, VE, VK, W/K, ZL and ZS.

There is also a listeners' section and rules and logging are the same as shown for the transmitting stations. Logs should show the station heard as well as the call of the station being worked and the serial number sent. Each British Isles country-numeral prefix heard is worth 20 points but the 50 bonus points for each ten station heard in each call-sign series is the same as for transmitting stations. Overseas s.w.l. of course only log British Isles stations.

Deadline for mailing is November 25, 1963 and your logs go to R.S.G.B. Contest Committee, New Ruskin House, Little Russell Street, London, W.C. 1, England.

YLRL Party

C.W.

Starts: 1700 GMT Wednesday, October 23
Ends: 2300 GMT Thursday, October 24

1963 CQ World Wide DX Contest

Phone

Starts: 0000 GMT Saturday, October 26
7:00 P.M. EST Friday, October 25
4:00 P.M. PST Friday, October 25
Ends: 2400 GMT Sunday, October 27
7:00 P.M. EST Sunday, October 27
4:00 P.M. PST Sunday, October 27

C.W.

Starts: 0000 GMT Saturday, November 23
7:00 P.M. EST Friday, November 22
4:00 P.M. PST Friday, November 22
Ends: 2400 GMT Sunday, November 24
7:00 P.M. EST Sunday, November 24
4:00 P.M. PST Sunday, November 24

Phone

Starts: 1700 GMT Wednesday, November 6
Ends: 2300 GMT Thursday, November 7

This is strictly a YL Party and being run the middle of the week, while the OM is awa from home. So when you fellows come hon after a hard day at the office and find no supp on the table you'll know the reason why. C second thought maybe you had better eat o that night.

Check Louisa's column on page 68 for t details.

Ed. Note

Seems we just put last year's contest to b and here we have another one on our hands.

The work of the harassed Committee wou be greatly reduced if you fellows were a litt more careful with your log keeping.

Unscored logs are no longer acceptable a will be used only as check logs.

Keeping an accurate log is as much an ob gation as working the DX. It's the contestan responsibility to check his log for duplicate co tacts and country/zone multipliers. Hereaft a high percentage of duplicates will be deem sufficient cause for disqualification.

A few minutes work by each entry will add t to countless hours of savings for the poor ov worked Committee.

It is not necessary to recopy your log. A go clean carbon of the original is acceptable, as lo as it has been corrected and duplicates and e have been crossed out. As a matter of fact would rather receive a log in its original for makes it easier to check the other guy's dup cates.

There is still time to get log forms from C A large addressed envelope with sufficient po age, please! Air Mail if they are needed for t phone contest.

Was just notified by the Potomac Valley Rad Club that they will donate the Trophy for t highest c.w. score on a single band. Than fellows. Wanna bet that one of their membe wins it.

Good luck, see you in the pile-ups.

73 for now, Frank, W1W

HAM CLINIC

CHARLES J. SCHAUERS*, W4VZO

THE day will surely come when a.m. will *only* be heard on u.h.f. and v.h.f., for s.s.b. and c.w. will be the predominant modes on the h.f. bands. This is understandable when it is realized that a properly performing s.s.b. rig puts out a signal which occupies only one-half the frequency spectrum space that an a.m. signal does.

The answer to the QRM problem in the phone portion of the hambands is not entirely the use of s.s.b. However, if all hams use only the power required for a QSO (local or DX) and s.s.b., you can bet that operating will be more enjoyable for everyone.

But we will continue to have our "die-hard" a.m.'ers who with their kw's will use 6 instead of 3 kc of frequency spectrum and contribute to the ear-splitting bedlam we now have.

Use only the power needed for a solid QSO, and if you are not already using s.s.b., plan on it, you will sooner or later . . . more than likely sooner!

SSB Signal Analysis

Some of us who are partial to SSB are not always lily white when it comes to putting out a proper signal. Some of the s.s.b. signals heard on the hambands are truly atrocious! Full of distortion, bad sideband and carrier suppression, *etc.*, these bad signals are, in some cases, worse than those delivered by an overmodulated a.m. rig!

The analysis of s.s.b. signals in the usual ham station consists of a receiver check for carrier and unwanted sideband suppression and distortion. These checks are not quantitative but rather qualitative in scope. They are all right as far as they go, but the ham who wants to put out the best signal that he can realizes that other in-station checks and rig adjustments are necessary.

Two-Tone Tests

The newcomer to s.s.b. hears that the best test he can make to determine the performance of his rig is the "two-tone" test. For this he needs an oscilloscope connected to the rig's final, either one or two a.f. oscillators and a vacuum tube voltmeter.

To check his filter type rig he merely feeds the two a.f. signals of equal amplitude into the speech amplifier, couples the transmitter to a good dummy load, adjusts the scope to obtain an envelope pattern, then looks for peak flattening caused by excessive drive or insufficient antenna coupling or poor driver stage regulation. He also checks for improper cross-over between envelope segments usually caused by too much final bias. He uses the v.t.v.m. to make sure that the outputs of his two a.f. oscillators are equal, or he can use it to check power output by measuring the voltage across the dummy load.

If he has only one a.f. oscillator he can inject carrier into his filter rig and obtain the same results. If a phasing rig is used he can put the set on a.m. leave the carrier balanced out and feed the a.f. oscillator into the speech amplifier.

Spectrum Analyzers

The two-tone test is fine to check linearity of the final stage of an s.s.b. transmitter, but meas-

[*Continued on page 82*]

A modern spectrum analyzer which covers from 1.5 to 64 mc. At top is panadaptor display. At bottom are tone generators and power output jacks and manual sweep control. *(Photo courtesy TMC, N. Y.)*

*c/o *CQ*, 300 W. 43 St., New York 36, N. Y.

RTTY

BYRON H. KRETZMAN*, W2JTP

RTTY Operating Frequencies

Nets centered on frequencies given; operation usually ± 10 kc on h.f.

80 meters	3620 kc
40 meters	7040 kc
20 meters	14,090 kc
15 meters	21,090 kc
6 meters	52.60 mc
2 meters	146.70 mc

NARROW shift radioteletype is coming into widespread use these days, in particular on 80 and 20 meters. Stations actively experimenting with n.f.s.k. are: W2JAV, W3TUZ, W4MGT, W5HCS, K6IBE, K8DKC, WØDKN, among others. In last month's RTTY Column we ran down some of the reasons for using narrow shift. We also described in detail the W2JAV transistorized narrow shift terminal unit.

The W2JAV n.f.s.k. TU is of the discriminator-audio-type, centered on 2125 cycles. For the more or less amateur standard of 170 cycle shift, *mark* is 2040 cycles and *space* is 2210 cycles. As we said last month, you just don't run your receiver directly into this TU. The limiters would act as harmonic generators, giving false responses from sub-multiples of frequencies with the basic 300 cycle band-pass. The solution, course, is to use a band-pass input filter centered on 2125 cycles.

*431 Woodbury Road, Huntington, N.Y. 11743.

RTTY The Hard Way... No. 24

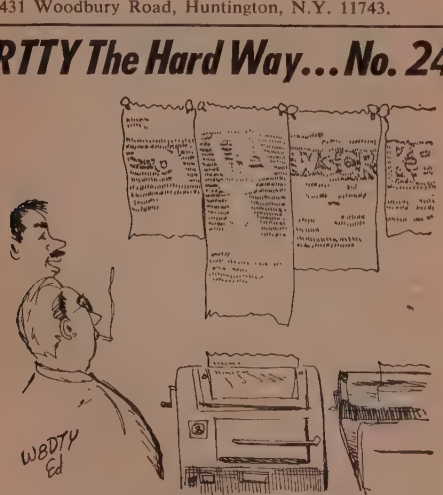

"QSLs sure have changed!"



Fig. 1—Band-pass input filter schematic diagram

C_1, C_2, C_3—0.068 mf 100 volt.
C_4, C_5—1.0 mf 100 volt.
L_1, L_2, L_3—88 mh telephone loading coil.
L_4, L_5—5.5 mh toroidal coil.
R_1—240 ohm ½ watt 5%.
R_2—1200 ohm ½ watt 5%.
S_1—Double pole double throw slide switch.

A Band-pass Input Filter for Narrow Sh

A band-pass input filter for narrow shif not quite as easy to design as one for the sta ard 850 cycle shift. (*The New RTTY Handbo* page 165) The big problem is to get the frequency response down as far as possi Naturally, such a filter is bound to be a bit m complex. Secondly, it is realized that most a teur RTTY stations do not have a ready sup of custom-wound toroidal coils. Therefore s a filter should use components obtainable by ham easily and at low cost.

Figure 1 is the schematic diagram of a nar shift input filter designed by W2JAV. Its co ponents are readily available. The capacitors standard values which can be bought over

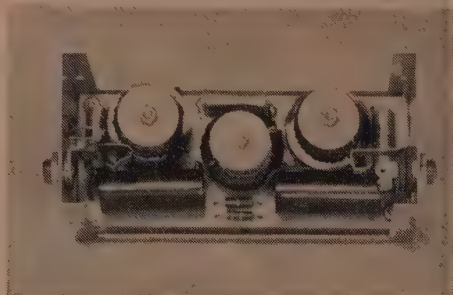

W2JAV Band-pass Input Filter for Narrow Shi



Fig. 2—Frequency response curve for input filter.

counter. Three of the five toroidal coils are the usual 88 mh telephone loading coils, mail-ordered from KCM Products, Box 88, Milwaukee 13, Wisconsin, for $1 each, postpaid.

The 5.5 mh toroidal coils are unusual, but 9 *mh* coils are available from Cortlandt Electronics, Inc., 88 Cortlandt Street, New York 7, N.Y. for $1 each, postpaid. These are quickly adjusted to 5.5 mh by unwinding about 48 inches of wire; a 5-minute job.

Performance

Figure 2 shows the frequency response curve of the W2JAV narrow shift band-pass input filter. The band-pass is 800 cycles, insertion loss 1.5 db (plus 3.5 db for the pad), and the 60 db down points are 800 cycles and 3900 cycles. Phil would like to emphasize that this minimal complex design is not finalized. He is not too happy with its response, especially at the top, and the ½-frequency response is not attenuated as far as he would like. So, at some future time we can expect an improved filter design from Phil.

By the way, if you have any questions on the narrow shift TU described last month, or on the filter described above, Phil would appreciate it if you would write to your RTTY Editor instead of directly to him. And, if you are looking for n.f.s.k. signals to copy, try GBY on 20,266 kc, GGS on 7430 kc, and "Whitehall" on about 7.6 mc.

Narrow Shift A.F.S.K.

The transistorized a.f.s.k. oscillator of W2JAV, described in the RTTY Column (*CQ*, March and May '62) can be modified for narrow shift by simply changing the values of the tuning capacitors. About 0.01 mf is added to the *space* channel to put it on 2210 cycles and about 0.025 mf is added to the *mark* channel to put it on 2040 cycles. While little use has been made (so far) of narrow a.f.s.k. on v.h.f., the W2JAV transistorized oscillator is extremely useful as a test device, as described last month, and for internal local audio loop purposes such as detailed in Chapter 5.2 of *The New RTTY Handbook*.

On The Bauds

K1OYB/WB2DQF reports considerable interest in the Portland, Maine, area, with TU's under construction by K1RSA, K1MTJ, K1RQE, and K1OYB. Marty also reports that machines are in short supply at reasonable prices up there, although many are being hoarded in garages, attics, and cellars. Old timer W1EFF of Gray, Maine, is still firing the younger generation with his demonstrations of RTTY.

K2YGL of New Hyde Park, N.Y., is on 80. W2ZKV of Elmhurst, N.Y. has several Model 26's for sale at $60 each. W3KNK of Harrisburg, Pa., has a batch of Model 26 spare parts for sale. W3MHD of Pittsburgh, Pa., had a lightning storm cause a short and fire in his v.f.o.

WA4OCY, ex-W3DTH, is now in Huntsville, Alabama, and has been re-appointed OBS in the Alabama Section. ARRL bulletins will be sent Thursday at 0200 GMT (Wednesday evening) on 146.70 a.m. and on 52.60 f.m. from Van's mountain-top location. W4BLD of Waynesboro, Va., reports that his v.h.f. repeater station is operable on 52.60 f.m. RTTY as well as 52.525 f.m. phone.

NCARTS demonstrated RTTY at the Greater Bay Area Hamfest (San Francisco) in September. K6DPQ of San Pablo, Calif., is building the W2JTP Fork Standard. W6NTK of Oakhurst, Calif., reports chatting with YV1EM of Venezuela while W6CQK visited down there. W7MEU of Seattle, Wash., has a Model 15 for sale at $75. K8WTE of Alliance, Ohio, finally got his Model 15 "brown foxing." W9QKE reports the formation of the Illiana Teleprinter Society, covering the south side of Chicago and northwest Indiana. W9HXW is President. Meetings are held the 2nd Tuesday of each month at Avalon Park, 1215 E. 83rd Street, Chicago. WØEGA of Sioux City, Iowa, is looking for a "MITE" printer, like described in the May '61 RTTY Column. [*ha—so am I, Bill!*]

YV5VW of Caracas, Venezuela, was heard on 20. HZ1AB, XV1EM, DL5LM, and GM3GNR were all worked by K8DKC.

Comments

Most of you are aware of all the comments being made on the bands and in amateur radio publications about incentive licensing, proper band utilization, using minimum power, *etc.* Well, we have been noticing frequently "cross-town" QSO's on the h.f. bands in areas far distant from New York, using needlessly hundreds of excess watts. This obviously does not go unnoticed, and certainly does not endear those stations with the rest of the RTTY gang.

As recommended by the May 3, 1963 Resolution of the Board of Directors of the ARRL, we are urged . . . "4. To expand the use of v.h.f. for local contacts wherever possible, with the ultimate aim of conducting all short-distance communication in this portion of the spectrum." Retired police and taxi f.m. transmitter-receiver sets are now available in large quantities to amateurs at low prices (around $20 to $60). Why not latch on to these and use *them* for cross-town QSO's on 6 or 2 meters? See page 74 of August '63 *CQ* and page 36 of the July '63 *CQ* for further information. 73, Byron, W2JTP

YL

LOUISA B. SANDO*, W5RZJ

CONGRATULATIONS to the Don Price family of Chicago, all six of whom share their ham radio hobby! It began in '58 when Don received the call K9PDT. In July '59 YF Diane became K9TRP, and two weeks later Donita, Gerry and Jim became Novices with the calls KN9TVN, TVO and TVP. Donita dropped the N when she passed General on her 16th birthday, Sept. 14, 1960. Jim and Gerry came up with Generals in the spring of '63, at the same time Alan became WN9IAN.

The home station consists of an HT-32, SX-117 and Johnson Viking Thunderbolt linear, with cubical quad for 10, 15 & 20. With so many hams in the family one wonders how they all get a chance at the rig. Diane has daytime hours five days a week, the rest share weekends and evenings, with Alan having his own rig on 40 & 80. Don and Donita also share a mobile rig going to and from work. Both work for Hallicrafters, Don as an engineer in quality control and Donita as a stenographer. She, by the way, was chosen Hallicrafters "Space Maid" for 1963.

Don and Diane are active in CD work. K9TRP likes DX (DXCC on phone) and certificate hunting (has nearly 50, is CHC #634 and member of CHC Chaps. 4 & 17). She is a past president of LARK and is secretary for Chicago Area Radio Club Council. Donita's main interest has been working the Armed Services bases all over the world. Don does all the building/servicing. Both Donita and Jim have been playing the Hammond organ for about six years, but other family hobbies have fallen by the wayside in preference for ham radio.

*4417 Eleventh St. N.W., Albuquerque, New Mexico

The all-ham Price family of Chicago. L. to r., standi Alan, age 13, WN9IAN; Don, K9PDT; Diane, K9T Jim 16, K9TVP; Gerry 15, K9TVO; seated: Donita K9TVN.

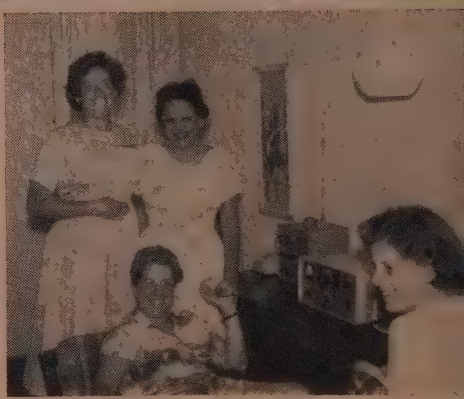

Powder Puff Derby radio net crew at Bakersfield, Ca takeoff, l. to r., standing: W6QGX, Harryette, chairm WB6AST, Isabell; seated: K6RLR, Jane, and WA6W Susan, jr. YL of W6QGX.

24th YLRL Anniversary Party

Here it comes again—the most popular co test among the YLs — YLRL's Anniversa Party. Get the dates down on your calenda C.W.—Oct. 23-24; Phone—Nov. 6-7. Rules the accompanying box. About the only chan is an addition clarifying what constitutes l power on s.s.b.

17th AWTAR

The 17th AWTAR took off from Bakersfie Calif. on July 13 with these YLs handling communications net: W6QGX, Harryette, cha man; WB6AST, Isabell; K6RLR, Jane; WA WFZ, Susan. WB6AST worked through the we preceding the Derby handling communicati between the airport and hotel where the c testants stayed, and helped log the cross-coun net. K6RLR, a newly licensed private pilot, f from Chico in her Cessna 140 to assist with net. WA6WFZ helped especially on the 2-me net from the field for take-off times. K6K Irma, assisted with 20-meter skeds.

[*Continued on page 105*]

Vol. 5, No. 10—October, 1963

VHF AMATEUR

BOB BROWN, K2ZSQ, Editor

In This Issue

Departments

Letters to the Editor..... 72
New Transistors 75
DX Report Column..... 77
[illegible] Column 78

Features

Editorial.....*Bob Brown, K2ZSQ* 71
Santo Domingo on Six!.....*Harold Lund, VP7CX* 73
Easy Way to 220.....*Michael W. McKay, W2GRS* 74
The "Pixxer" for Two Meters.....*John A. Fredricks, K7GGJ* 76

Cover Photo: *VHF Sideband Editor Bob Heil, K9EID, at his 2 meter 128 element Quad. Inset "2" beam installation.*

Address all correspondence to: Bob Brown, K2ZSQ, Editor, *The VHF Amateur*, 300 W. 43rd St., New York, N.Y. 10036.

New from Gonset

A HIGH QUALITY TRANSISTORIZED SSB TRANSCEIVER

that is

ULTRA-COMPACT • LIGHT WEIGHT • low in cost

Gonset has scored a breakthrough with the new "Sidewinder"—a 2 meter SSB AM and CW transceiver that combines technical excellence with contemporary design and compact, sturdy construction.

The Gonset "Sidewinder" provides coverage of the entire 2 meter band in four segments 1 Mc wide. It has built-in VFO and the receiver is *completely* transistorized. There are a total of 21 transistors, 6 diodes and three tubes in the "Sidewinder," which operates on either SSB, AM or CW.

The power supply is designed for snap-on back or remote installation and is available either as a kit or a wired and tested unit.

CHECK THESE DELUXE FEATURES AT YOUR LOCAL DISTRIBUTOR!

• Receiver and transmitter utilize dual conversion. • Designed for mobile and fixed station operation. • Illuminated dial and "S" meter. • High voltage power supply is used only in transmit mode. • Highly Stabilized VFO • Crystal lattice filter for both receiver and transmitter. • 20 watts PEP input SSB, 6 watts input AM, 20 watt input CW.

Transceiver: 8¾" wide, 4¾" high, 7" deep. Weight: 7 lbs.-10 oz. Amateur net price **$349.95**

Power supply: 8¾" wide, 4¾" high, 5½" deep Weight: 11 lbs.-2 oz. Amateur net price—kit **$39.9** Wired and tested unit **$49.9**

The new Gonset "Sidewinder" SSB Transceiver will be on display at your local distributor's in August.

GONSET, INC

A SUBSIDIARY OF ALTEC LANSING

801 SOUTH MAIN STREET, BURBANK, CALIFORNIA

For further information, check number 30, on page 110

Editorial . . .

Poor Relations

IT MAY WELL BE JUST a matter of locale, but lately it seems as if we amateurs in the New York City metropolitan area have been getting a lot of just plain "bad press." As in most sections of the country, this region is served by a great many newspapers, both daily and weekly, which more or less convey the temperment of the moment in black and white to millions of residents. During the past summer months, however, amateur radio and the VHF enthusiast especially have been the whipping boy of many ill-informed journalists. Public relations is an integral part of our hobby, and its maintenance requires skill, understanding, patience and just a bit of old-fashioned diplomacy to be kept in smooth running order.

What do we care what John Q. Public thinks? Plenty. *Amateur radio exists because of the service it renders.* But to read the recent newspaper accounts reaching this office, you wouldn't have the first idea how we ever got licensed. Its really no wonder the average American citizen sometimes feels perplexed when the ham comes on the scene—a sort of mixture of skepticism and wonderment. You certainly can't blame him, though. Most of what he knows about the radio amateur is what he reads in the papers. And it is that skepticism mentioned earlier that we're concerned with at the moment. Amateurs (three papers specifically noted *6 meter* amateurs) seem today to be better known for their arrogance and TVI generation than for their knowledge and services. Cases cited in print are admittedly a bit dramatic and perhaps highly exaggerated, but they certainly get their point across: the 50 mc operator causes TVI.

I recently wandered into a radio-TV repair shop in Linden, New Jersey, with a few 2 meter friends. We wanted to purchase two tubes to replenish those lost in the results of a not too successful attempt to get on 220 mc. While I was waiting to be attended to, a stack of literature caught my eye. Being one of those odd individuals who reads everything he gets his hands on, I picked one sheet and proceeded to get the shock of my life. This was a professionally reprinted article that originally appeared in a well-known Newark, New Jersey, newspaper concerning TVI. It must have taken three-quarters of a page in the paper when it ran. The writer of this masterpiece apparently didn't get a byline, but the printed word spoke for itself. Here was an article citing individual cases of amateur-caused TVI! At least a dozen examples were presented in a rather sarcastic tone of the "scientific American amateur radio operators who come blaring through television sets from Netcong to Hoboken in total disregard of the viewer." The writer went on to explain about the high power levels amateurs are allowed to employ and then made a juicy comparison by pointing out that the newly formed Citizens Radio Service with its 5 watt power limitation seems to accomplish just as much without bringing about TVI. When the proprietor finally got around to waiting on me, I asked him where he got these article reprints. I was told they were furnished free of charge to all the local shops by the friendly neighborhood Citizens Band Club. And he had others to show me, ones he had clipped out of the newspapers for display purposes. This kind of public relations we can well do without. And this is only one example.

6 Meter Influence

In an area so densely populated as this one, cases of 6 meter TVI (generally front-end overload of Channel 2) have never been uncommon, but neither has the amateur's gentlemanly attitude toward the matter. There probably isn't one 6 meter operator in the country who hasn't experienced at least one case of TVI. But this has never been a stumbling block to the serious enthusiast because he has taken upon himself to clear it up in a friendly manner.

Unfortunately, however, the many thousands of cases of good neighborly relationships never make the *Daily Bugle*. What does hit the papers is staggering. "I'll bet we're giving them the devil on Channel 2 tonight," and "You'll just have to ignore them, Hank, if you want to enjoy six," made page two in a mass circulation daily this summer. "Let them call the FCC for all the good it'll do them," reached into a Connecticut weekly. An entire county (says the reporter) heard "CQ Channel 2 Gunsmoke fans" one Saturday night. Need we go on?

As unbelievable as they may sound, these messages appeared in black and white not long ago for the edification of the city dweller and suburbanite alike. "News" they call it and news it must be. Far from the "local radio amateur makes good" stories of yesteryear, eh? Regardless of their frequency, each and every one of these reports strikes another blow into the amateur radio we know today. And there's bound to be *some* truth in them however biased they may appear to be.

Little wonder our low frequency brothers scoff occasionally when someone suggests they try VHF. Look what they've got waiting for them! The 6 meter operator may be just a small part of the entire amateur picture in this country, but he has certainly made his mark in one way or another. And his impact is felt by every ham who can read a newspaper. I've heard many old timers tell me that they feel the average 6 or 2 meter operator isn't far removed from a CB'er. But we know better . . . or do we? Are you proud of conditions as they stand today? Would you like your neighbors to hear some of the things we hear on six?

Perhaps what is lacking here is realization.

[*Continued on page 79*]

THE VERSATILE

Li'l Lulu

COMPLETE 50 MC. TRANSMITTER

DESIGNED BY

F. E. LADD, W2IDZ

If you like the best, check these features:

- Full-band coverage, 50 to 54 mc.
- Stabilized VFO, gang-tuned to amplifier stages.
- VFO filament and plate voltages fully regulated.
- 12DQ7 final power amplifier.
- Top quality audio.
- Clean c.w., shaped keying.
- Built-in antenna changeover relay.
- Low pass filter for minimum TVI.
- Built-in power supplies for both 115 v.a.c. and 12 v.d.c. (transistorized).
- Comprehensive instruction manual.
- One year warranty.

Price: $225.00 through your dealer.

Schematic and full particulars available on request. Dealer inquiries invited.

FOR INFORMATION, WRITE

WHIPPANY LABORATORIES, Inc.

1275 Bloomfield Ave., West Caldwell, N.J.

For further information, check number 19, on page 110

Letters to the Editor

Mail your letters to: Bob Brown, K2ZSQ, Ed
The VHF Amateur, *300 W. 43rd St., New York,*

5¾ Meters

Hi Bob:

The VHF Amateur is missing the boat if all do not pull together. You do not know, nor can a not associated with commercial two-way radio, danger the upper half of six meters is in right How about a campaign to "Use it before we lose This portion, often called the 5¾ meter f.m. ban the only band where we can utilize obsolescent mercial gear, and the cost is miniscule compare that of complex s.s.b. and other glorified mode operation.

I'm interested in corresponding with those inter in forming a 5¾ meter net with two freque of operation, 53.820 and 53.964 mc. Those who ha used receiver can utilize an existing standard 8 f.m. set with little or no conversion, or a Du RA-103 TV which covers Channel 1 (6 meters) thr 220 mc. Even today's TV's can be detuned suffic to cover six meter f.m. The f.m. dollar buys mo about 700% today.

So let's see a new leaf in VHF—perhaps an column—eventually encompassing 5¾ meter f.m. ations!

Gene Mick, W3ZV
515 Buxmont
Philadelphia, Pa.

We, too, would like to hear from fellows inter in this little-known aspect of VHF'ing! If enough in is generated, we'll do our part by presenting modifi articles.—ED.

C.W. VHF Contest

Dear Bob:

A c.w. VHF contest? Marvelous! Some of us have been stirring up activity by working c.w. o meters. Just talked to some other hams—You have support, too.

Carol Hoke, WA4L
Conover, North Ca

Carol, so far we've only received three cards fa the c.w. contest. We're going to need more res than that if this is to get off the ground! More com invited.—ED.

Transceiver

K2ZSQ:

I would like to see a construction article ab simple, inexpensive 6 meter transceiver in *The Amateur*. How about it, OM?

Richard Polson, WB
Fresno, California

So would we, Dick! Prospective authors please we pay cash plus a subscription for articles publ Write today.—ED.

Citizens Band

Dear Bob:

As one listens to CB during times of skip, it w realized the extent of its separation over and abo original concept. The monster has reached such portions that corrective measures are difficult remedial procedures of a beneficial nature seem po

It's not necessary to go into the details conc the situation about which you, as Editor, must be aware. Therefore, in a small and singular manne might follow a procedure similar to one which ha terminated in a satisfactory way.

The case: About two years ago the 15-year-ol of a local business man through his father's infl name, etc., secured a CB license and, of course chased equipment. His operations were cons reasonable, if not wholly unnecessary.

My influence, somewhat as an experiment, encou

[*Continued on page 79*]

Santo Domingo on Six!

HAROLD LUND, VP7CX
RCA San Salvador AAFB
P.O. Box 4187
Patrick AFB, Florida

MANY TIMES DURING RECENT MONTHS I have been asked why there isn't more six meter activity in the Caribbean area. With the exceptions of FG7XT, VP5BB, a few Cuban stations, and many Puerto Rican stations, there has not been much activity to speak of. Some of the openings to this area have been exceptionally good and the lack of activity was the only reason that new countries haven't been added to many logbooks this year.

When I discovered that my vacation time was piling up and would have to be taken soon or lost, I decided to try to give some of the fellows a new country on six.

During a 15 meter QSO with Max, HI8MMN, I learned that it was possible for an American citizen to be issued a license in the Dominican Republic. As Santo Domingo has long been a vacation favorite of my co-workers on the Atlantic Missile Range, the decision of where to go was not hard to make.

Ed Clegg, W2LOY, offered to make available a new Clegg Thor 6 transceiver for the trip. This proved to be an excellent choice of equipment as the maximum power allowed on six meters in the Dominican Republic is 50 watts. A three element portable beam was selected as a compromise between size and efficiency. This also turned out to be quite adequate for the trip.

I left San Salvador by military aircraft on Friday, June 21, 1963. I spent that night in San Juan, Puerto Rico. While in San Juan, I called Felix, KP4CK, and asked him to have the San Juan gang watch for me. About noon I caught an airliner to Santo Domingo and arrived there about 3 PM. As it was a weekend, I was forced to leave the equipment with Customs and wait until Monday before applying for a license. I took advantage of this opportunity to enjoy some delicious food and see some of the many interesting sights around Santo Domingo.

Sunday evening I visited Dave Packard, HI8XAA, who is with the American Embassy. Another of the local American hams, Howard Shoemake, HI8XHS, also stopped in during the evening. We had a very nice visit in Dave's beautiful (but all l.f. band) ham shack.

Here's a shot of HI8MMN, son of the Director General of Telecommunications in the Dominican Republic, operating HI8XHL in July. Rig was a Clegg Thor 6 transceiver.

View from the antenna site atop the Hotel Embajador looking toward the north. Though not clearly visible in this photograph, a high mountain range lies just beyond Santo Domingo.

Early Monday morning I went to the office of the Director General of Telecommunications. Señor Nanita, who is HI8MN, personally handled the application and also made arrangements to have the equipment released by customs. By that evening, I had permission to operate as HI8XHL.

Before leaving San Salvador, I had been offered the use of an apartment in Santo Domingo. One of my co-workers maintains this apartment for his vacations. Upon arrival in Santo Domingo, I set the station up there, but soon discovered that ignition noise was extremely high from a nearby thoroughfare. The line voltage regulation was also very poor and shortly after dark would drop so much the receiver would go dead.

On Tuesday morning I was at the rig bright and early. I wasn't disappointed. The band opened into the W4 call area and the rat race was on. One of the first stations worked was W5SFW.

On Wednesday and Thursday, the band was again open, mostly into the W4 call area. However, it was becoming more and more evident that the line noise was causing many QSOs to be missed. On Friday I moved into the Hotel Embajador on the outskirts of Santo Domingo. I was able to get a room on the seventh floor and arrangements were easily made to put the antenna on the roof. The hotel engineer is the president of the local radio club and he and the hotel staff were all very helpful and cooperative. The band was dead after moving and the only QSOs that day were with local stations.

Saturday, Sunday, and Monday the band was

[*Continued on page 81*]

Another VHF Amateur Exclusive:

Easy Way To 220

MICHAEL W. McKAY, W2GRS
277 Crest Drive
Tarrytown, New York

THE INTENT OF THIS ARTICLE is to describe a quick and simple surplus conversion to get you on the 220 mc band with results quite respectable out to 30 miles or so and dependent only on your antenna beyond that range. Based on alteration of the SCR-522 transmitter, it will be obvious that the scheme to be described is equally useful in the VHF ARC-5 series. Since there are probably several thousand of these venerable clunkers outstanding today in the hands of amateurs across the country, it is the writer's hope that perhaps this discussion will result in more use of a fine, though neglected band.

How It All Started

For many years a 522 transmitter had been used on the 2 meter band here with very good results. (There is a rumor prevalent among the locals that the location here was checked for altitude with an aircraft altimeter prior to purchase.) The exceptional performance of this simple gear was attributed to: 1) a 10 element, well matched array and 2) a clear line-of-sight to the horizon about 35 miles away in the direction of Philadelphia. Once in a while speculation of what life was like upstairs on UHF did occur, but being lazy, nothing was done about trying the higher bands. Then one fine day a brother ham informed me that he was selling out, going to Florida, etc. Running down a neatly typed six page list, I found a well known commercially wired 220 mc was being disposed of at 3% of ham net. Protesting the unfairness of this outrageous price, I was lucky to get away with only the converter, a 5 element yagi, and a set of tubes for the unit, and it was but a few nights later when the first 220 mc QSO was received. As I recall it was between Larry, W2NTY, and Mike, K2QWE, two fine operators and real regulars who have done much for the band in this area. I need not add that an intolerable itch developed to talk to the 10 or 12 stations in northern New Jersey and Long Island that were now received regularly in this period of nocturnal eavesdropping. But the question was how.

The Solution—Back To Fundamentals

Back issues of *CQ* were moved to the office and thoroughly searched for several days. However, the available construction articles all involved tubes not on hand or were just more bother than it appeared to be worth. The problem really solved itself one day when the filter on an old receiver dried out and all that was heard was full wave ripple, i.e. 120 cps hum. But it was double the input frequency. Could it be applied to rf? Sure, although here the scheme is called push-push doubling. At this point let it be seriously suggested that the reader dig ou his *ARRL Handbook* and read up on this subjec It is all there. Really nothing new or differe is being set forth here save possibly how to mak this work on VHF.

So there you have it: apply push-push dou bling to the final amplifier (the twin tetrode 832 and get on the 220 mc band in a hurry. Now th means that final must be excited at 110 mc. Bu remembering that the 522 originally tuned 1(mc to 156 mc, this is fine. All that need be dor is to supply a 6 mc crystal and tune the rig t 110 mc indicated on all dials save the last whic is not used. Where to get a 6 mc rock? Well, unit at 6112 kc was purchased from U.S. Cry tals, Inc., La Brea Ave., Los Angeles, Calif. happened I got mine while on a business tr to that area. However, any of the crystal cor panies advertised in *CQ* should be able to su ply crystals in this range, either new or surplu Naturally the latter are considerably cheape Caution: check and find out where the activi is in your neighborhood. Around New York ar New Jeresey everyone seems to operate in th bottom 200 kc of the band, while in Philadelph a common channel of 221.4 mc is used.

For those who must tinker let it be said th the 522 works like a charm delivering power c 110 mc. The one here, which barely lights a watt bulb in normal fashion on 144 mc, reall lit up on 110 mc because of the greater dri available.

Another caution note. If you have just rushe out and purchased a new surplus 522 transmitt *do not* alter the tuning range of any of the tank circuits. Most conversions electrically ban spread these controls. If, as is done here, it desired to occasionally use the rig on 144 r (with an 8 mc crystal) then the full tuning ran of these circuits must be retained.

Now We Have To Do Some Work

Push-push doubling involves driving the pa off the final 832 at 110 mc, strapping the pla together, and tying them to a tuned circ resonant at 220 mc. This is where some inve tion was required. First, the paralleled pla double the 832 output capacity, so don't ev bother with a conventional parallel tuned c cuit. There just isn't any coil left to work wi But another expedient is available which is t series tuned tank. This worked and is the sec of success in this conversion.

One approach to understanding this sche (neglecting the load for the moment) is to vi the tuning capacitor, C_T, as being in series w the tube output capacity, C_o. This series com nation then is adjusted to resonate with the



Fig. 1—Diagram of an accepted series tuned circuit suggested by the author. See text for discussion.



Fig. 2—Actual series tuned circuit applied by the author to his SCR-522 for operation on 220 mc. C_1 is a Cardwell capacitor cut down to a three plate variable with one rotor and two stator plates. Stator plate-to-plate spacing is 1/16". Diameter of rotor plate, 1½". Rotor is grounded. L_1 is 2 turns of tinned #18 wire ⅜" dia., spaced 1".

ductance L at the desired frequency which is 220 mc here. Since C_O in series with C_T is smaller than either capacitance alone, the result is a coil which, though small, is big enough to work even at 220 mc.

To couple a load to this arrangement, a link arrangement was tried much as shown. This was not particularly successful probably due to the stray capacity introduced by the link. Anyway this was abandoned. The similarity of the series circuit to the "Pi" network was noted and the load applied directly across the tuning capacitor. A blocking capacitor of course is required to avoid shorting out the B-plus in the grounded antenna system. The load at this station is a fairly well matched 75 ohm coaxial line (v.s.w.r. is under 1.5 to 1). It was connected exactly as shown and right off the bat 5 watts were developed at the output. This was later increased to about 8 watts.

Varying the L/C ratio seems to optimize the loading as would be expected. However, the coil dimensions indicated resulted in reasonable output so that little fiddling was done afterward. The writer prefers to operate.

In the diagram are coil dimensions, etc. which worked here with three different 832 tubes. The connection T bar to the 832 plate leads was made out of the pins from an old octal socket and a piece of wire. It should be noted that soft tinned #18 wire was used for the coil and T bar. It was not silver plated though this refinement might help.

Looking at the final amplifier plate compartment of the 522, remove the end cover plate and discard it. Detach the existing tank circuit plate leads and tie down to the butterfly capacitor so they are out of the way (remember that you may want to go on 2 meters sometime). Use electrical tape for this. Mount the new 3 plate tuning capacitor on the top of the compartment, midway between the 832 and the existing butterfly tank period. Wire in the coil, choke, and blocking capacitor to a coax fitting and the transmitter is complete.

One more operation is required and you will be on the air. The problem is simply that the push-push arrangement will in practice usually have 110 mc drive power in the output due to residual unbalance in the final amplifier. Therefore insert a T fitting in the output coax line and tie in an open ended stub which is cut to be ¼ wavelength at 110 mc. Don't forget line phase velocity factor in cutting this stub. Since it is desired to short the output at 110 mc, the stub must be open on the far end. At 220 mc the stub is effectively out of the circuit and has no effect on the desired band. Considered as a filter, the stub blocks the odd harmonics of 110 mc, i.e. 330 mc, 550 mc, etc., and passes the even orders, i.e. 220 mc, 440 mc, 660 mc, etc. Do not operate without this stub in the line. In areas where UHF TV is in use proper selection of the transmitter crystal will usually move any remaining harmonic problem out from under the TV signal.

For tuneup a Heathkit v.s.w.r. bridge is left in the line as an output indicator at all times. Insert a 6 mc crystal (6112 kc used here) and tune for max. indication on a 0-1 ma meter connected to the 522 meter pins. This procedure applies to meter switch positions 1, 2, and 5. This tunes the transmitter up to the final grids. To tune the final use the v.s.w.r. bridge. Now go back and maximize the output on the bridge by trimming the low frequency stages again. You are now set to operate.

Results are most gratifying considering the effort involved. Local range contacts are easy and beyond the horizon work is a function of your antenna. Though far from DX, this rig easily reaches down beyond Somerville, N. J., from this location (about 25 miles north of New York City.)

In conclusion the conversion outlined will get you on 220 mc with the least fuss. Although it is a cheap way and maybe a little dirty, it works. Try it, and come on a good band. ■

New Transmitting Transistors for 6 and 2!

RCA HAS RECENTLY ANNOUNCED PRODUCTION of two new VHF power transistors ideally suited to amateur VHF work, for possible use in low power transmitters, mobile units for 2 meters, etc. Two new silicon n-p-n triple diffused planar transistors, the 2N2876 and the 2N2631, are rated at 3 watts minimum *output* at 150 mc, up to 10 watts at 50 mc! The 2N2876 and 2N2631 have high voltage ratings (80 volts max. V_{CBO}, 60 volts max. V_{CEO}) are 100% tested to assure freedom from second breakdown in class A operation at maximum ratings. —WA2NDM ■

A VHF Amateur Exclusive:

The "Phaser" for Two Meters

JOHN A. FREDRICKS, K7GGJ
314 South 13th Avenue
Yakima, Washington

The author presents an easy-to-construct phase modulator that can be connected to any a.m. transmitter to achieve the same basic advantages found in frequency modulation. When the operator wishes to return to a.m., he simply turns down the gain control on the phase modulator!

MANY VHF HAMS HAVE AT ONE time or another wanted to try their hand at VHF p.m. operation. If you are one of these fellows, then take a look at this. First I would like to point out that this particular rig is not complete in itself as a transmitter, but is rather an adapter that can be added to any 2 meter rig to permit p.m. operation without impairing other modes of operation.

Now let's get on to the diagram, as can be seen in fig. 1. The crystal oscillator is nothing out of the ordinary. It is, in fact, a modified Pierce-type of oscillator. The triode half of the 6U8 is used as the phase modulator and deviation is set by capacitor *CN*. Maximum deviation will be attained at maximum capacity. No attempt to multiply in frequency should be made in either the xtal oscillator or in the phase modulator, as frequency "swing" at the resultant output frequency will be down. Frequency multiplication should take place only after the phase modulator stage.

I don't believe that much has to be said about the audio section except that deviation is also controlled by the audio gain control and you may not have to build the stage at all. You may be able to steal the audio from the speech preamp stage in the a.m. section of your rig. The reason that I built up the audio stage was so that I could go from p.m. to another mode of operation merely by turning down the gai control in the phase modulator unit.

In my 2 meter unit I simply removed the ol crystal oscillator and built the p.m. unit in t the rig and now I utilize the PM osc for a modes of operation. I would also like to poi out that I did not include coil specs becaus there will be some who will want to put th adapter on 3 mc, 6 mc, & 8 mc to multiply t 2 meters, and I also feel that anyone who co structs VHF gear has the technical ability t come up with the appropriate coils.

The resistor divider network in the contr grid of the triode half of the 6U8 is called a audio correction network and performs the fo lowing function: When a phase modulator employed, the equivalent carrier frequen "swing" is in proportion to the amplitude of th audio signal. Rises in the audio signal frequen cause further undesired phase shift in the carrie The unwanted rise in phase shift is removed b the use of an RC network to lower the amplitu of the audio signal in proportion to the frequen increase.

In this particular circuit a deviation of ± kc was attainable with the trimmer *CN* at fu capacity, and the audio gain control "wide-open I have had this adapter on for about three mont with very good reports so get out the solderi iron and good luck on 2 meter p.m.!

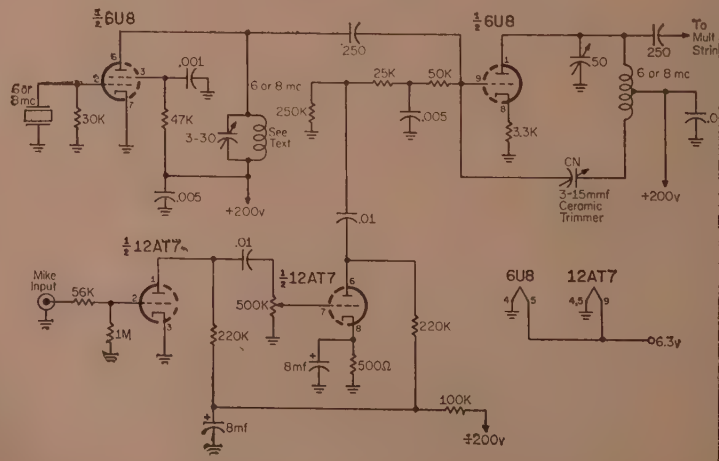

Fig. 1—Schematic of the phase modulator as constructed by the author for 2 meter operation. Coil specs are not included, as you may want to use this unit for other bands (see text). All resistors are ½ watt.

DX REPORT

an exclusive feature of The VHF Amateur

BOB BROWN, K2ZSQ*

Tuning Two

K1RTS SEZ WE OUGHT TO SEPARATE OUR six and two meter coverage each month because "it's very confusing, you know." So this month we have. And while we're at it we'll mention that Walt's got up a new 13 el. long-john and is hoping for the best. Are there any active 2 meter ops in Maine? If so, Walt wants a sked.

WA2DRK works K8KEQ/3 every day for a nice 145.07 mc 220 miler. Average sigs S6-7.

W1QQ is back on the air after 14 years absence and is working well into upstate New York and Canada. John wants more stations to tune 145.44 mc for him.

K9EID sez, "Been holding skeds with K7HKD and WØENC on 2 meters. HKD has 64 el. "J" antenna and really makes it to Marissa. Several good transmissions from ENC. My new 128 elements really perform!" Write Bob for skeds.

WB2CLN spends his 2 meter time working stuff like K1WVE, K1NPE, K1FRU, K1NNA, K1MIY, K1MDZ, K1WHS, W1HAD and W1BXM (187 miles). All this with just a Twoer transmitter!

KN1ETM writes that he hears W1COP but no QSOs yet. "I don't think he tunes to my 145.335 mc frequency." Bob also wants skeds, but forgot to include his QTH.

Al, WA6YOB, fills us in on the 2 meter Grizzley Peak repeater. Input freq: 146.2, output: 146.8 mc. All f.m. (will convey a.m. if you're right on freq.). Repeater runs automatically 100 watts to a vertical system. Coverage is from Sacramento to San Jose and from the West Coast to the Sierra foothills. Write Al for more details.

K1PLR was mobile on the Merrit Parkway in Connecticut but still managed a 58 goodie with K1CLL/1 in Worcester, Mass. for a nice 150 miles! "Have not been too active on ham bands lately due to YLs," adds Harry.

WA2MBT has petitioned the FCC to extend Technician coverage of two meters to 144—148 mc. Will keep you posted on developments here.

Scanning Six

VP7CX writes with loads of news from San Salvador on 50 mc. Harold reports contacts with FP8CB, VE4GI, VE4FO, FP8CG and WØGNS (state #37) during the July 13-14 weekend. Contacts with HI8XAG, K5IQL, KØWLB (states #38-39) have also been made. He adds that in spite of what gets into print these days he has 15 Kentucky QSLs so far this year. K2SQM/VE1 and VE3CUA were snagged on July 28th. FG7XT and VP5BB have also been active.

According to Harold's latest letter, PJ3AO and K4UTE will be in Anguilla and Tortola this October. They're hoping to be on six. VP7NX is very interested in getting on 50 mc. VP5BB is now on 50.060 mc thanks to xtal from 7CX. Harold also proposes a possible "adoption" system for clubs interested in sponsoring a VHF station in a rare country by contributing gear. More on this later.

K7OCG in Phoenix is mighty proud of his recent 2100 mile QSO with the boys at WA2VLR in N.J. John adds that July was a great DX month for him.

KL7AUG was worked by forty Seattle and Portland area stations during a 5½ hour session on July 30-31. Signals ran S9-plus much of the time according to W7DYD who was one of the lucky ones. KL7AUG has been snooping on six for four years and reported this opening as the best ever. Thanks, Herb, for the news!

W8KNC/Ø in Belle Fourche, S.D., sent us a lengthy letter covering July from his end. Let's suffice it to say many boys worked their first South Dakota then! K2MGZ was one mentioned. Ira operates out of Black Hills National Park at Custer Peak, 6800′ plus! Twenty-six states worked just in July.

WA4JYN is quite proud of his QSO with K3WVX (Fla. to Md.) that lasted 2 hours and 10 minutes during the solar eclipse on July 20.

WA4HXZ/4 is having a DX ball in his first weeks on six. Skip galore for Henry.

K4NEH is pleased with his July 20 skip DX which included VP9WB. Vernon sez WA4BDR is active from Kentucky.

WA9FIH has been busy working WA6AKM, K6GRJ/6, W8KNC/Ø, WAØBBI/Ø, K7EMO and VE4AE.

WB2HHT is now WA4PJT in Virginia. Steve is on 50.19 and 145.278 mc ("2 meters is pretty dead here"). Look for him.

WA2GWM floods us once again with a barrage of news contributing to his record of 794 different stations on 6 meters in 15 months. This takes into account 32 states plus VE1, VO1, CO3 and FP8. Frank needs one more Memphis "cotton picker" for their award and some skeds with Maine, Texas and Oklahoma.

WØGXJ in Cedar Rapids reports much July DX including W6ABN/6 for a nice 1000 miler.

K4LFN/6 is on 50.1 and 51.0 mc s.s.b. with 50 watts from Guadelupe, California. Skeds appreciated here also.

KØFPC writes, "Around here we are regarded as 'nuts' because we use push-to-talk and break-in in the manner of the low frequency sidebanders (which some of us are). We also operate c.w. on 50 mc and some of us even build our own equipment. Aren't we weird?" *Not to my way of thinking. Bob. Sad commentary, eh? K2ZSQ.*

WA8EWT picked up Idaho (K7YON),

[*Continued on page 79*]

*Editor, *The VHF Amateur*, 300 West 43rd St., New York, N.Y. 10036.

UHF ROUNDUP

an exclusive feature of The VHF Amateur

ALLEN KATZ, K2UYH*

IT TAKES JUST ABOUT TWO months from the time this column is put together till the time it is printed. Bob and I have tried to make this fact known, but at times it seems like a well-guarded secret. Especially when a fellow is disturbed because an important bit of news he sent in does not appear in the very next edition. Bob is doing all he can to limit this necessary delay. Most readers are probably already receiving Bob's most recent effort, the *VHF News Bulletin*. Besides these side effects sometimes suffered by our (heaven praise 'em) contributors[1] who really make this column possible, the time delay does not go unnoticed by us. It is kind of like eating an upside down cake right side up.

Columnist K2UYH observing unusual effects of h newly installed synchronous detection system. (Pho courtesy Universal Artists).

How to Hear Signals Under Noise

Here is what Bill Ashby, K2TKN, probably the most advanced amateur in this field, has to say about his system. "At present I am using the following method with *excellent* results. Any oscillator in the receiver is sine-wave wobbled by applying a stable reference audio signal (200 cycles) through a variable phase shifter to a varactor diode across the oscillator, giving a $\pm$ 1 kc swing. The output of the receiver is fed to a limiter-discriminator that is saturated with receiver noise. Any coherent signal, even though buried in the noise, shows up at the output of the discriminator as audio. Tuning the receiver across a signal shifts the phase, but there is a very strong output of the correct phase when the signal is centered on the discriminator crossover.

"The audio output is fed to the sync detector through a low Q filter centered on the stable audio oscillator frequency. Attempts at high Q here lead to trouble. The sync detector comes in many forms, but always turns out to be a balanced modulator. If the signal being fed in is exactly the same frequency and phase as the reference oscillator, the output of the detector contains the difference and the sum frequencies. The difference is d.c. in this case while the sum is 400 cycles if the stable oscillator is 200 cycles. The sum frequencies may be selected by an extremely sharp audio filter and used directly into an audio amplifier, but this approach doesn't buy any noise figure improvement, just a sharp audio filter. The other output, the difference (d.c.), is very usable. I have used it to directly power a transistor audio oscillator, trigger a number of various Schmitt triggers, and operate a sensitive relay amplifier. By adding capacity across the output, long time constant integration is easy to come by. I have used as much as 10 minutes of time constant at this point, but a low pass filter with a cutoff just below the stable oscillator fr quency will work well, but you get no integratio adder.

"The phase shifter mentioned is of extren importance, for the d.c. output of the sync d tector swings positively or negatively dependi on the phase of the received signal and this mu be peaked up to the proper polarity on a wea signal for optimum results." *Thanks, Bill!*

Alan Goodacre, VE3BZS, Apt. 324, 219 Be St., Ottowa, Ontario, Canada, is very interest in corresponding with other amateurs interest in weak signal detection. Alan, too, has built synchronous detection system that sounds qui interesting. More next month.

General News

WA4GHK is becoming quite an enthusias UHF'er. Jim operates out of Palm Bay, Florid on 220.067 mc and regularly works W4V (120 miles away). W4EMB (180 miles) w worked recently. Jim is looking forward to so skeds. Write to him at 896 Port Malabar Bl in Palm Bay today! "There are no locals here 220 mc. Have to work DX to work anyone!"

From what W5HPT tells us, LeRoy, W5AJ continues to be the leading force in UHF in t area. He's on every morning, doing a real ba up job on 6 through 432. More from Vic n month.

K1RTS in Waterbury, Conn., sez all he's he ing on 220 mc is radar peaking to the southw (S7-8). No QSOs yet. Skeds wanted! QTH: Wildwood Avenue.

W9OVL, the Hoosier from Hammond, I really been drawing in the 220 mc DX. His Ju list (what are we talking . . . June in October includes K9DNG, K9OYD, K9WSZ, WA9FL W9RPF and W9SKN. Ben is running 125 wa on 1¼ meters. Month of July brought him

*48 Cumberland Avenue, Verona, New Jersey.

[1]If you are not a contributor, you can quickly become one by sending a self-addressed stamped envelope to me for your UHF Reporting Forms.

ASK THE MAN WHO OWNS ONE

. . . Like W5AJG and K9EID and you'll find that he's got one of the finest signals on the air. Check Bob Brown, K2ZSQ, article in the February 1963 issue of *The VHF Amateur*. More and more serious VHF DX enthusiasts swear by the revolutionary "J" antenna, and the proof lies in what they work!

Why is the "J" beam better? Well, for one thing they are custom built to your specifications — no short cuts anywhere — and commercially engineered to produce maximum results under all conditions. Guaranteed SWR of less than 1.5 to 1 over *entire* band! The "J" beam antenna was designed especially for VHF bands and it makes use of waveguide concepts in the feed system which guarantee efficiency far above the ordinary. Stacked "J's" are available from 8 to 180 elements! Free literature available.



2 Meter Double Four — $23.50

Get Your "J" Beam At:

- **Halort Electronics**, 711 West Main, Sparta, Illinois.
- **Channel Radio Supply**, 18 East Ortega, Santa Barbara, Calif.
- **Hatry of Hartford**, 100 High St., Hartford, Connecticut.
- **Mission Ham Supplies**, 574 Mission Blvd., Riverside, Calif.
- **Southwest Elec. Devices**, 129 E. Jefferson, Phoenix, Arizona.
- **Quement Ind. Electronics**, 1000 S. Bascon, San Jose, Calif.

GAIN INC. *Available for 6 meters, 2 meters, 220 and 432 mc!*
Bill Roberts, W9HOV, 1209 West 74th Street, Chicago 36, Ill. *Phone:* 874-2610

For further information, check number 32, on page 110

same crew, but with sometimes better sigs.

W6IEY is on 432 mc from La Mesa and tells us that W6BLK, W6AUB, W6ETZ, WA6FJF and W6CMQ are also active. Dick uses a TDZ tripler cavity driven by a 2 meter SCR-522.

WA4GHK is on 432.216 mc, but no contacts yet. *Where is everybody?* Write for skeds as per QTH above. Jim uses a 2C39 Centimeg rig.

K5SDM in Houston caught W5HPT in Bedford, Texas, back on June 21st on 432. Also active down that way are W5AJG, W5SWV, W5YND, K5JHG, W5LYY and K5TUP. W5HPT sez he's still got his amateur TV, but no one to look at.

W2NTY conducted a demonstration at the August East Coast VHF Society's Hamfest. There he was in the mobile, laden down with an APX-6, an APR-5A (mod.) and a 446A cavity, a.m. modulated, working K2QWE, W2DZA and W2ZDE on 1296 mc. Then to 2410 mc for another go at K2QWE. Unfortunately I missed this due to the European excursion, but K2ZSQ got quite an eyefull!

Oh, yes. And here once again is WA4GHK telling us about his hearing radar on 1300 mc 20 miles away with just a 3" whip antenna. "Can hear the radar continuously throughout the 360° rotation of its antenna, but there is no mistaking the main lobe when it passes over this QTH about once every 30 seconds!"

Okay, boys, that about wraps it up this month. How about some more photographs and letters from you UHF'ers?

73, ALLEN, K2UYH

Letters to the Editor [*from page 72*]

the boy to go for a Novice. He did this after a few months of CB work when it is assumed the "ham infection" took place.

Recently he began working on code, picked up theory from magazines and books, tried his hand at small homebrew stuff and now has taken his Technician test. Meanwhile he acquired a 6 meter transceiver and beam. Thus in two years another ham is born to the fraternity. This is what was referred to in a previous paragraph as "remedial." The value is multifold:

1. Persons desiring the affiliation found in over-the-air contacts which have been heretofore questionable may find security.

2. The fact that they have a legal operation but know in their heart that they are using it contrary to the laws brings a moral effect into being.

3. To many young fellows who operate CB in a really non-legal manner, there is the ever-present "culprit" status which is not ethically good in the training of a good citizen.

Conclusion: Let every ham find a "CB ham" and follow the same procedure outlined above, introducing him to amateur radio. If there arises the question of crowding the 50-54 mc band with a few thousand more Technicians, then consider the reason for this class of license—experimental—and find means of utilizing the entire spectrum without TVI, etc.

Randy Blodgett, KV4CQ/WA2DEW
St. Thomas, Virgin Islands

Comments are invited on this controversial subject. —ED.

DX Report [*from page 77*]

VP7CX and CO5CN during July. Good sigs, too.

W6IEY has been making use of the skip snagging Arizona, South Dakota, Utah and Wyoming.

K1PLR wants skeds anytime to upstate New York (area of Corning-Ithaca). Write: 48 Crane Rd. N., Stamford, Conn.

WA4IRX's busy working Quebec (VE2BEW) and usual skip stateside. Al wants sked to Kentucky ground wave mornings between 6-7 and evenings between 9-10 CST. Write: 1609 Dearing Rd., Memphis. *Al's got 42 States confirmed so far during 1963!*

Down Nashville way W4IMX is mighty happy with his 2461 miler to K7DTS in Washington as well as VE4GI, K7MKW (Idaho), W1LKH (R.I.), K3WVJ (Del.), W1KZS/1 (Vt.). States standing now rides at 43 worked, but still waiting on Oregon and Mississippi to confirm. Bill's getting on two meters soon.

K9PVS is desperately looking for Michigan, Wisconsin, Illinois and West Virginia. Please write him for skeds. K9PVS is interested in getting SWL reports from 50 mc monitoring stations. Charlie's also interested in going f.m.

73, BOB, K2ZSQ

Editorial [*from page 71*]

Realization that every time we throw that switch it's like talking into a public address system. The low frequency gang doesn't need to be told this. They work thousands of miles every day. In this respect, though, the VHF bands aren't that much different. We, too, are being heard. Only our SWLs sometimes come in the form of television viewers. Bear in mind that no matter

Supreme SIX METER SSB Transmitter

• Using The McCoy 48B1 Golden Guardian Crystal Filter • 75 Watts PEP Input, 6146 Final • USB—LSB—CW—AM Operation with Carrier injection • 7360 Balanced Modulator • Unwanted Side Band Suppression greater than 55 db. • VFO Controlled • Size—Width 15" Height 6½" Dept. 7½" Weight 9¾ lbs.

Model SSB-6
Wired & Test
$289.5

For additional information, write:

Supreme Electronics Inc

FRONT AND MAIN STS. • UPLAND, PA.

For further information, check number 33, on page 110

POLYCOM 6 AND 2 METER TRANSCEIVERS

IN STOCK AT A.E.S.

ONLY **$5 DOWN**
PAY ONLY **$11.71**
MONTHLY
Polycom 6
(36 months)

Look How Little You Pay Monthly After $5 Down Payment

	3 years
Polycom "6"—AC/DC $329.50	$11.71
Polycom "2"—AC/DC $349.50	12.44

Pictured above is the Polycom "2" 2 meter transceiver. It has 17 tubes, 10 diodes, triple conversion, and dual Nuvistor RF amplifier. Mini-load VFO, 17 watts input, supersensitive noise limiter, ultra stable squelch.

PLUS TERRIFIC TRADE IN ALLOWANCE ON YOUR PRESENT GEAR

Use Order Coupon from other ads in this magazine

AMATEUR ELECTRONIC SUPPLY
3832 West Lisbon Ave., Milwaukee 8, Wis.

For further information, check number 34, on page 110

how clean you feel your situation is, there be someone, perhaps blocks away, who is cepting your signals. Audio rectification int recorders, stereo equipment, etc., is not uncommon. The important thing for us member is that ham radio is not a private com system. We are broadcasting.

The issue at hand is not one of how to TVI. We all know pretty much what to do the situation is brought to our attention. Wh are talking about is operating technique might call it "protection" in this case. It neighbor who doesn't telephone to con about TVI that is our source of concern, most likely will continue to move in hi circles (which may include newspapers) once meeting you. He should *not* be ignor his negligence in not contacting you, but he should always be remembered for h there for quite a spell. Conversation abou for its own sake need not be aired for the to hear. TVI is a personal affair which be handled individually with the utmost macy and tact. To express this to a neigh person and then say things inferring just t posite on the air is only going to defea purpose.

I would very much like to hear from yo your feelings on the matter. Perhaps all favorable CB publicity in the papers h incited me a bit. In any case I sincerely ho the cases mentioned here are but isolated tions and are heavily outweighed by m

serving reports of the true amateur. Regardless, however, it's food for thought.

Bob Brown, K2ZSQ, EDITOR

Santo Domingo [*from page 73*]

not in very good shape. Only Bert and Chuck, at HI8XAG, and a few W4 stations were worked. Things at this point did not look too encouraging. To date, only about 75 stations had been worked in the 4-5-8-9-Ø call areas. There had been no openings to the East Coast of the U.S. and it looked as though many of my friends up there were going to be disappointed.

On Tuesday the band opened early into the W4 call area. After working a few 4s, suddenly W1QXX broke through followed by W1BU. About this time the band went wild. About 125 stations worked during this opening, mostly in the 1, 2, and 3 call areas. The band stayed open until early evening with W3BWU being heard after the band had pretty well gone out.

Wednesday morning the band was again open to Florida and a few other states in the W4 area. I had a few QSOs with them and a final QSO with HI8XAG and regretfully turned off the switch. I spent the afternoon saying goodby to the many friends I had made in Santo Domingo and then took a taxi to the airport. I took a jet flight to San Juan, spent the night there, and caught a military flight the following morning from San Juan to San Salvador.

Considering the adverse conditions I operated under the first few days, I feel the trip was quite successful. In addition to giving me a much-needed vacation, I was able to give about 200 stations a new country on six. I heard California on two different days, but was not able to work any 6s. VE3CVX was heard with a good signal, but I couldn't raise him. YV5AGM was worked during one of the openings and KP4BJO was heard quite regularly on ground wave. While I was in Santo Domingo, several of the local stations became interested in six meter operation and about ten of them had six meter gear under construction when I left. Already active are HI8XAG and HI8RO. HI8ORC was also worked by several stations during the July 2 opening.

Six meters is a fascinating band. With the many types of propagation available, it's ideal for the rag-chewer, the DXer, or the experimenter. Many rare countries are represented on six making it a good band for the certificate hunter during the summer months especially. This year from my QTH in the Bahamas I have worked 39 states, VE1-2-3-4, FG7, FP8, HI8, and KP4. I'm sure many more countries could have been worked if there had been activity. I'll be on six the next time it's open. Will you? ■

2 ANTENNAS IN 1



6 & 2 Meter
Model No. A-62
Amateur Net A-62 $33.00
Stacking Kit AS-62 $2.19

Patents allowed and pending

The Only Single Feed Line
6 and 2 METER COMBINATION YAGI ANTENNA
another first from **FINCO®**

ON 2 METERS
18 Elements
1 — Folded Dipole Plus Special Phasing Stub
1 — 3 Element Colinear Reflector
4 — 3 Element Colinear Directors

ON 6 METERS
Full 4 Elements
1 — Folded Dipole
1 — Reflector
2 — Directors

See your FINCO Distributor or write for Catalog 20-226

THE FINNEY COMPANY
Dept. 19 Bedford, Ohio

For further information, check number 18, on page 110

A Twoer With Super-Het Selectivity?

Why not . . . It is a super-het. At least those that have been modified with LE Kit No. 2NT6301. They now enjoy real super-het selectivity, increased sensitivity, terrific noise limiting—all inside original case. Complete kit with well illustrated manual, $29.50. Average const. time, 5 hrs. Our 46 years experience will back you up. **Lawrence Eng. Co., 36 Lawrence Rd., Hamden 18, Conn.**

VHF SPECIALISTS
Converters & Preamps for 50 mc, 144 mc, and 220 mc
The finest VHF equipment for the man who wants the best. See our catalog ads in the May, June, and July issues of **CQ.** Write today for spec. sheets.
PARKS ELECTRONIC LABORATORIES
Route 2, Box 35—Beaverton, Oregon

Free VHF News Bulletin

For several months now **The VHF Amateur** has been publishing a one or two sheet bulletin containing letters of interest and up-to-date DX news. Send a supply of large self-addressed stamped envelopes to: **VHF News Bulletin,** 300 W. 43, N.Y. 36, N.Y.

VHF.. BCNU NEXT MONTH

uring the linearity and the various distortion products, hum, sideband and carrier suppression quantitatively can only be done accurately with a spectrum analyzer (SA).

So far, no manufacturer has produced an SA priced low enough for ham use. The SA used by commercial and military stations cost from $4000 to $15,000—a little high for the average ham!

Basically, however, the SA is not an overly complicated instrument. What makes the cost so high is the calibration accuracy, frequency range, precision oscillators and so on.

The SA enables the visual analysis of a s.s.b. signal by measuring each of its components. Both desirable and undesirable components are shown on a cathode ray tube whose face is calibrated horizontally for frequency (sweep width factor) and vertically (left), from 0 to 40 db and linearity (right) from 0 to 1. Range switches are generally incorporated to extend the log scale from 40db to 60db.

In fig. 1, a typical spectrum analyzer is block diagrammed. This SA is the Model PTE-3A manufactured by The Technical Materiel Corporation of Mamaroneck, N. Y. It can be seen that the unit consists of a panoramic analyzer, master oscillator, mixing stages and two tone a.f. and r.f. generators.

You will note that the a.f. oscillators have outputs of 935 and 2805 c.p.s., while the r.f. oscillators have outputs of 1999 and 2001 kc. The two audio tones have been selected to produce the most revealing distortion pattern of a transmitter or exciter. The predominant distortion products, which are of an odd order, *i.e.*, 3, 5, 7, and adjacent to the carrier down to the 9th order, are displayed on the CRT screen. The two r.f. tones are used to check out the SA for proper operation by noting whether or not the two pips produced on the CRT screen are exactly 2 kc apart.

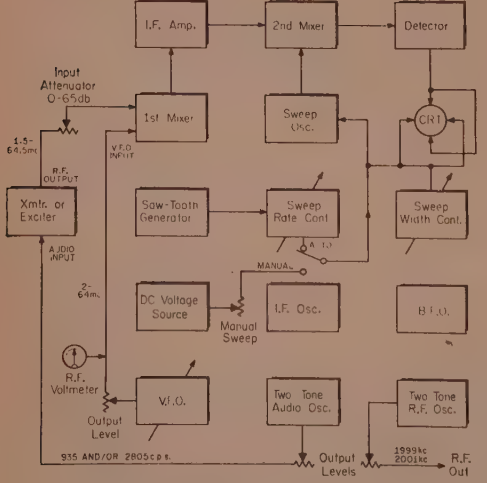

Fig. 1—Block diagram of the TMC r.f. spectrum analyzer.

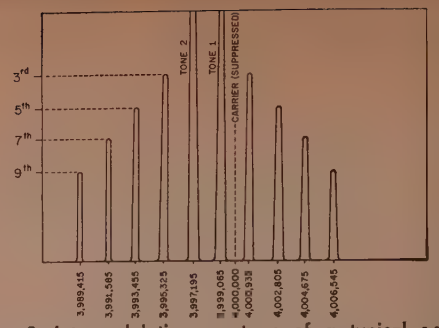

Fig. 2—Intermodulation spectrum of a typical s.s.b signal (l.s.b.) showing the relative amplitudes of odd order intermodulation products. This display is typical of spectrum analyzer displays.

Figure 2 shows the intermodulation (IM) spectrum of a lower sideband signal as it would appear on the SA with the upper sideband suppressed. The suppressed carrier is 4 mc with two-tone modulation, $F_1 = 935$ c.p.s. and $F_2 = 2805$ c.p.s. Appearing on the screen are the two lower sideband frequencies produced by the tones and the IM products adjacent to the carrier. Amplitudes of the IM products are considerably smaller than the two l.s.b. frequency amplitudes. In a properly adjusted transmitter, third order products should be at least 40db down from the carrier amplitude. The relative amplitudes shown in fig. 2 do not represent actual conditions but illustrate the fact that there is a general decline progressing from 3rd order to 9th order products. The figure is for the purpose of illustrating the horizontal locations of the products in relation to carrier and the two lower sideband frequencies.

Figure 3 shows the various screen displays representations on a spectrum analyzer.

Noise appears as periodic transients on the SA screen. Hum appears as pips at the frequency or multiples of the line frequency. For example in a 60 c.p.s. hum source, hum will appear at 60, 120 and 180 c.p.s. distances from the carrier frequency.

Questions

Because of the numerous figures in this month's column, we cannot run any of the

[*Continued on page 104*]

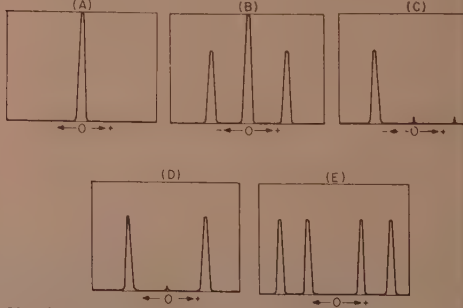

Fig. 3—Spectrum analyzer displays of typical c.w., a.m. s.s.b. and d.s.b. signals. A—Carrier alone (c.w.). B—Carrier with single tone modulation (a.m.). C—Single sideband (one-tone modulation). D—Double sideband (one-tone modulation). E—Double sideband (two-tone modulation).

radiate a horizontally polarized signal. Ideally, the elements would become progressively thicker as they were further from the center of the array. If all angles in such an array converge to the center point, the ideal feed-point impedance is about 190 ohms. These arrays are bidirectional, into and out of the page.

If the array suffers a sharp bend at the center (fig. 4), the signal strength in the direction of the center-point is increased and that toward the larger elements is decreased.[5] It is not particularly difficult to get 30:1 power ratios (15 db) in the front-to-back directions.

Forward gain of 6 to 10 db is not hard to get if fan angles and bend angles less than 60° are used. A minimum of 30° each seems to be a good practical limit, though fan angles as low as 15° have been reported. Reducing these angles increases both the gain and the front-to-back ratio.

The name log periodic comes from the idea that the elements show a slight but continuous change electrically with frequency. As the frequency continues to change, the characteristics will repeat themselves over and over. As these "repeating" frequency characteristics occur at fixed multiples of the previous frequency, the element lengths have a constant logarithmic (or "log") spacing, hence the name "log periodic."

A designer does not have to be able to "work" logarithms or trigonometry to lay out a log periodic antenna.[6] The procedure is: lay out the fan angle on a piece of paper with one inch standing for a couple of feet. Draw a line bisecting the fan angle. Draw a line ¼ wavelength long at the design or lowest frequency at right angles to the bisector to just touch one side of the fan angle (fig. 5). This determines all other dimensions of the fan. The design frequency for fans like those of fig. 3(A) is the lowest operating frequency, but for (B) should be about 82% of the lowest operating frequency. The place where the ¼ wavelength line touches the angle is the end of the outermost element.

Now a fraction must be chosen that will determine the number of elements needed and the variation of s.w.r. with frequency. The fraction will best be between 0.8 and 0.95. As the fraction increases, the number of elements goes up and s.w.r. changes become less. Let's assume 0.8 is picked. We then pick a spot on the other side of the fan angle 0.8 of the first distance from the corner angle. This is where the next crossing element begins. Then go back to the first side of the fan angle, and measure from the apex 0.8 of the last distance or 0.64 of the original (0.8 × 0.8). We continue this effort, zig-zagging back and forth with elements until the end of one is less than ¼ wave from the bisector at the highest operating frequency. Count the number of lines that represent elements to see how many you need. Measure the lines to see the element lengths. Remember, this is for one fan, and two are needed. Should you wonder how you are going to hold those elements in place, the bisector is at ground potential and makes a very logical boom.

Feedpoint impedance will probably be over 100 ohms, so high impedance coax may be desirable—at least 72 ohms, unless a balun is used. Twin-lead (150 ohms) would seem about ideal from an impedance standpoint. A common form of feed is to poke coax cable through part of the lower boom, with the shield connected to the lower set of elements and the center conductor connected to the upper.

[5]DuHamel and Ore, "Logarithmically Periodic Antenna Designs," *1958 I. R. E. Convention Record*, Part I, p. 139.
[6]C. T. Milner, "Log Periodic Antennas," *QST*, Nov, 1959, p. 11. G. J. Monser, "Design for an All-Purpose TV-FM Antenna," *Electronics World*, Nov. 1962, p. 36.



Fig. 5—Typical design layout for one fan of a log periodic antenna.

Commercial version of a log periodic antenna. *(Photo courtesy Collins Radio Co.).*

Fig. 6—Two identical fans are reversed and mounted one above the other to form the antenna shown in fig. 4.

After construction of the two fans, lay the upper over the lower to check for differences (there should be none), and then lift and rotate one fan so that the open sides of its elements are over the closed sides of the other fan (fig. 6). Install hardware to give the desired bend angle, add feedline connections, and raise into position.

Watch out for harmonics—the log-periodic will happily radiate them with the same gain it gives your desired signal. ■

and relay contacts which provide a normally-closed ground contact for use with a receiver's standby circuit. Other relay contacts provide a d.p.d.t. arrangement, normally closed on one side.

Power Supply

Three power supplies operate from a common secondary on the power transformer. All told, thirteen silicon rectifiers are employed. Their use saves space, provides good regulation and eliminates about 50 watts of heat which might otherwise be generated. Each one is shunted with a separate .001 mf capacitor for surge protection. The supplies furnish +750 volts for the final, +300 volts for the low-power stages and —100 volts for bias needs. A rear-apron switch is used to accommodate high or low power-line potentials.

Panel Controls

Panel controls include FINAL TUNE and LOADING, METER SWITCH, METER SENSITIVITY, DRIVER TUNE, BANDSWITCH, CARRIER LEVEL, EMISSION switch for L.S.B, USB, AM/TUNE or CW and OPERATION switch for OFF, STANDBY, MANUAL, CALIBRATE, VOX and PTT. Also included is a small hinged door behind which are recessed the following controls: METER ZERO, ANTI-TRIP, VOX SENSITIVITY, VOX DELAY, CALIBRATE LEVEL, CARRIER BALANCE and ALC THRESHOLD. This arrangement makes the controls readily available, yet protects them from accidental misadjustment. There are three dials for the frequency synthesizer.

Operation and Performance

The Model 6100 is set to frequency by means of the frequency-synthesizer dials and the band-selector switch. The first synthesizer dial varies the frequency in 100 kc steps, the second in 10 kc steps and the third tunes continuously throughout a 10 kc range which is calibrated in one-half kc increments and is readable to less than 200 cycles. The third dial has an adjustable hair-line fiducial for aligning any band against a calibrator. The frequency read-out is obtained from the sum of the dial settings and the position of the band selector.

When the frequency is tuned to zero-beat with another signal, the operation is somewhat different than one is accustomed to when a conventional v.f.o. is used. Instead of having one dial to twist to cover an entire band, there are three dials to turn before the beat can be located. This is not as involved as it may at first appear. If the receiver is well calibrated, chances are that after the ×100 and ×10 synthesizer dials are set accordingly, rotation of only the ×1 dial (this has a slight overlap at each end) will rapidly locate the beat. If the receiver is only approximately calibrated, it most likely will be close enough to indicate the 100 kc segment of a band concerned, for which the ×100 dial can be set and the ×10 one then switched step-by-step from 0 to 10 at the same time the ×1 dial is being rotated over its full range until the signal is heard. A little practice in this regard will enable the operator to quickly tune to frequency without difficulty.

Tune-up procedure is quite conventional. With the operate switch set for manual, carrier is inserted and the DRIVER TUNE, FINAL TUNING and LOADING are all adjusted for maximum output as indicated on the meter. The operation and emission controls are then set for the desired function.

The manufacturer's specifications for frequency stability are: Less than 100 cycles drift during first 15 minutes from normal room temperature. During any hour thereafter it is less than ±25 c.p.s. Results with the unit indicated performance within bounds. P.e.p. output is conservatively rated as 100 watts. It was found possible to actually obtain 115 watts on all bands (with a power-line potential of 117 volts) with good linearity.

Distortion products are rated 40 db below peak (140 watts input) with voice input and a.l.c. in use. Carrier suppression, sideband suppression and spurious-mixture signals, at least 50 db down.

The a.f. response (350 to 3300 c.p.s. at 3 db points) was found to produce a most natural and intelligible sounding signal. On-the-air checks all reported outstanding a.f. quality. The a.l.c. works like a charm. Use of 3 to 5 db of compression effectively raises the average power level with no sign of flat topping or other distortion. Pumping action, as found with some systems, was not exhibited.

The vox functions very smoothly and there is no annoying audible clatter from the vox relay. With c.w., the keying characteristics are really beautiful and break-in operation is good.

The transmitter is solidly built using high-quality components of more than adequate power rating. A continuous carrier output of 120 watts was fed into a dummy load for over an hour with no sign of excessive heating of components nor did the power output drop off. Our only criticism of the unit is that an antenna-changeover system was not included.

The Model 6100 is mounted in a tilted-up table-top cabinet with dimensions of 18⅜" × 9½" × 16" and it weighs 60 lbs. It is nicely laid out in a neat design having a silver-colored panel with black trim and black knobs with silver colored skirts. The price tag of $875 is higher than the general run of gear, but it is well justified for equipment of this quality and with such outstanding features. The Model 6100 Transmitter is manufactured by Barker & Williamson, Inc., Bristol, Pa.—*W2AEF*

You Saw It First In CQ

by hams...
for hams...
Harvey is reliability

harvey
VALUES OF THE MONTH

MODEL K CONVERTER BY ALLTRONICS-HOWARD —

Audio input. Output jacks on front for Magnet and Keyboard. Keyer Tube keys magnet directly (no relay). Loop and bias supplies built-in. Wired sockets provided in converter for polar relay for keying transmitter, or external relay may be used. Distortion control on panel. Automatic Mark hold in absence of signal. Copies any shift 100 to 1,000 cycles.

Model K for Rack Mounting **$189.00**
Cabinet ..... **$ 14.50**



ROTRON WHISPER FAN

The fan that moves 60 cu. ft. of air per minute . . . while running so silently you have to look to see if it's running! Removes heat to save your rig, yet uses only 7 watts. Measures 4½" square by 1½" deep. Has run for years in computers and other commercial equipment without attention — lifetime lubricated. Operates on 110-120V. A.C.

Amateur Net..... **$14.85**

EXTRA-SENSITIVE HEAD PHONES BY SUPEREX

600 ohm impedance; extra-high sensitivity for weak signals and hard-to-read stations . . . reproduction is crisp, free of distortion . . . unequalled wearing comfort over long use.

Amateur Headphone Model AP-S.

Amateur Net **$24.95**

MONARCH MODEL MT-220 VOLT OHM METER —

Ranges — DC Voltages: 0-2.5 - 10 - 50 - 250 - 500 - 5,000 Volts (20,000 ohms per volt) . . . AC Voltages: 0 - 10 - 50 - 250 - 500 - 1,000 Volts (10,000 ohms per volt) . . . DC Current: 0-0.05 - 5 - 50 - 500 ma . . . Resistance: 0 - 12K - 120K - 1.2M - 12M ohms (60 - 600 - 6K - 60K midscale) . . . Decibels: —20 to +62 db.

Amateur Net **$14.95**

TELETYPE PAGE PRINTERS REBUILT BY ALLTRONICS-HOWARD —

most popular teletype machine among amateurs. Equipped with synch. motor for 110-120 VAC 60 cycles. Cover refinished . . . all units thoroughly tested mechanically and electrically.

Model 15 with holding magnet, keyboard..... **$250**

Model 15 with holding magnet, keyboard, automatic carriage return-line feed..... **$370**

Model 28 specially equipped Teleprinter..... **$750**

WE SPEAK YOUR LANGUAGE —and have for 37 years. It means orders from every corner of the world are handled personally and your instructions, in any language, are followed. It means we speak the universal language of all radio amateurs. And that gives you such ham-to-ham extras as consultation on your problems, meeting specific requirements, and — at your request, with no charge — opening sealed cartons for complete equipment check-out.

Send check or money order including shipping charges. We return any excess.

harvey
RADIO CO., INC.

UNI-CARD

103 West 43 St., New York 36, N. Y. (212) JUdson 2-1500

For further information, check number 37, on page 110

MAXIMUM
SELECTIVITY
for the
Drake
2A and 2B
Receiver

Now
AN EXCITING NEW 2KC.
Mechanical Filter
Modification
Kit
IS AVAILABLE FOR THE DRAKE 2A • 2B
RECEIVER
... EXCLUSIVELY AT HENRY RADIO

LIKE MAGIC THE DRAKE BECOMES A
TRULY SUPERLATIVE SSB RECEIVER.

UNIT COMPLETELY
WIRED, READY FOR
EASY INSTALLATION!

MODEL DMF-2
$29.

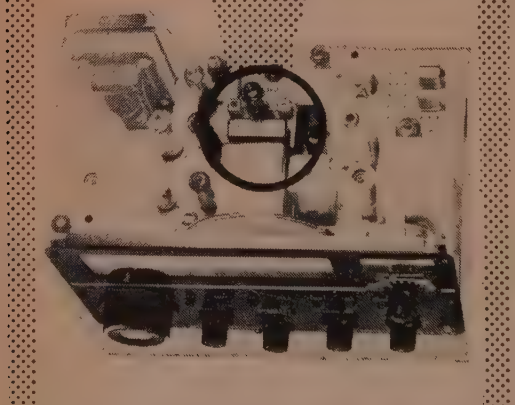

Henry Radio Stores
Butler 1, Missouri Ph. ORchard 9-3127
11240 West Olympic Blvd.
Los Angeles 64 Ph. GRanite 7-6701
931 No. Euclid Ave., Anaheim, Calif.

For further information, check number 2, on page 110

How About That? [*from page 40*]

ing. The other half of the bed was smooth, col and empty! Except for our four-year old wh was breathing with her mouth open again ther wasn't another sound in the house. I though "My gosh, he's touched two wrong wires to gether or something and is probably lying on th floor stiff as a dipole antenna! I threw on m dressing gown and hurried downstairs with fa beating heart fearing the worst! There sat th master of the house with a beautific smile on h face oblivious to time or anything other tha whatever was coming through those ear-phone firmly clamped on his head! I was at once re lieved and then mad as a hornet and could hav almost cheerfully have applied the electrode to his chair and plugged him into the neare socket!

Sometimes when he appear to be settled i the shack for the duration (of our marriage tha is) I palm myself off on some unfortunate neigh bor for an hour or two. As soon as the doo closes behind me he's upstairs as if by some pre arranged signal and informs me fondly when come home he just can't settle when I'm not i the house and has, "been up in the living roo all evening." After this loving remark he happil disappears for an all-night session with the soun waves! There's a sadistic streak in 'em all!

His "Junk" as I tenderly choose to call it is no always confined to his shack either. On occasio I have found his shirts, etc.: stacked in a wobbl pyramid on a bedroom chair where they hav been placed for an indefinite period to mak room for some large, lumpy objects he simpl *has* to have near him. If I remonstrate he holler "Well, where else shall I put them?"

Once I gave out an ultimatum, "Either som of that stuff leaves the house or I do!" Did m darling hesitate in his choice? Not for a minut bless him! However, I knew I would miss th children too much so I decided to stay!

I know even normal-type husbands are know to be fond of comfortable old clothes—bu really! On those long awaited special outing with my beloved, after spending hours makin the most of what I've got (and believe me that not easy), as I glance at my escort of the evenin I can't help but mention that a sweatshirt an sneakers don't quite fit the occasion!

Of course things were very different on the da he had to go to the "big city" to pass his fin test. Normally I can't pry him out of bed unle I set fire to the covers (this works but it's ver hard on the sheets, but that morning he leape out like an athlete in training, was shave showered and away, shining and suave as a advertisement in a Sears Roebuck catalogue!

If we stay with a friend during the summ vacation at her lake cottage, guess where h spends all his time? Out in a dusty, cobwebb old garage with his mobile rig.

Even the families' three teen-aged daughte doth protest also. There they are all ready an

TERRY
W9DIA

TIRED OF QRM?

GO TO 6 and 2 METERS with CLEGG!

We'll make it EASY . . . because we want to become the biggest CLEGG dealer in the entire country . . . therefore

WE'RE TRADING WILD!

pay shipping charges when you order
gg equipment without a trade-in.

CLEGG ZEUS

CLEGG INTERCEPTOR

CLEGG THOR VI

**$5 DOWN DELIVERS ANY CLEGG EQUIPMENT . . .
LOOK AT THESE LOW MONTHLY TERMS**

	1 Year	2 Years	3 Years
Zeus 6 and 2 Meter Transmitter . . . $695.00	$63.25	$34.50	$24.91
Interceptor 6 and 2 Meter Receiver. 473.00	42.83	23.33	17.91
Clegg '99er 6 Meter Transceiver . . 159.95	14.11	7.70	5.56
Thor VI 6 Meter Transceiver 349.95	31.62	17.25	12.45
Available Soon—DC Supply for Clegg Thor			
Model 372 Low Pass Filter 14.95			

Here's Elin, K9YHE, Terry's own personal secretary, using a Clegg Thor during her coffee break. She thinks that the new Clegg Thor is the mostest. Listen for her little voice and BIG SIGNAL on six meters. . . . Or better yet, send her an order to type up.

Order From
This Ad!

AMATEUR ELECTRONIC SUPPLY

MILWAUKEE 8, WIS.
3832 West Lisbon Ave. • Phone We. 3-3262
Hours: Monday and Friday, 9 A.M. to 9 P.M.
Tuesday, Wednesday & Thursday, 9 A.M. to 5:30 P.M.
Saturday, 9 A.M. to 3 P.M.

CHICAGO 31, ILL.
6450 Milwaukee Ave. • Phone: Ro. 3-1030
Hours: Monday, Wednesday & Thurs., 12 P.M. to 9 P.M.
Tuesday & Friday, 12 P.M. to 5:30 P.M.
Saturday, 9 A.M. to 3 P.M.

ORLANDO, FLA.
23 Azalea Pk. Shop. Ctr. • Phone 277-8231
Hours: Monday, Tues., Thurs. & Friday, 1 P.M. to 9 P.M.
Wednesday, 1 P.M. to 5:30 P.M.
Saturday, 9 A.M. to 5:00 P.M.

IMPORTANT! Send all Mail Orders and Inquiries To: Terry, W9DIA at our Milwaukee store, c/o Department (C)
Get Our Quote Today, No Obligation

Terry: I want to buy _____

I have to trade _____ (what's your deal?)

STAY ON THE AIR PLAN
Not only will I give you a terrific trade-in allowance, but you can keep your equipment until you receive your shipment.

Ship Me: _____

I enclose $_____ and will pay balance
☐ C.O.D. ☐ 1 Year ☐ 2 Years ☐ 3 Years
(10% deposit)

If ordering on terms, please list following information on separate sheet and enclose with this order: Name, address, age, married? children? Employed by? Salary? How long? Own or Rent Home? To whom renting? or buying from? Wife employed? Own car?—who buying from? Three to five credit references. The more information you give, the faster we can approve your credit.

EVEN IF YOU'RE NOT ORDERING TODAY, SEND ABOVE INFORMATION FOR ATTRACTIVE CREDIT CARD

NAME _____

ADDRESS _____

CITY _____ STATE _____

☐ Check for latest reconditioned bulletin.

For further information, check number 38, on page 110

eliminate ignition system interference

Webster band-spanner.

ELECTRO SHIELD KIT

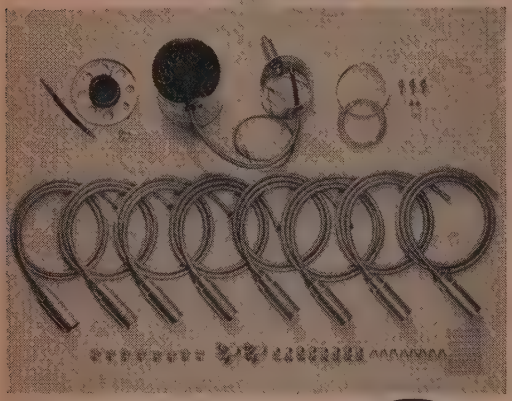

ELECTRO SHIELD prevents radiation—stops ignition noise at its source—by completely enclosing the entire ignition system, coil, plugs, distributor. **Entirely mechanical,** no phasing or filtering.

Now in kit form for substantial saving! Complete as illustrated. New cap and total shield for distributor—coil shield and filter—plug shields and leads. Snap-on plug connections are **swaged**—won't pull out or loosen. Plug shields have molded inserts which eliminate sparkover also waterproof plug. Kit includes all necessary hardware and full instructions. Typical installation is shown in circle.

Two kits available for 8 cylinder cars:
For '57-'63 Buick, Cadillac, Chevrolet, Corvette, International Harvester, Oldsmobile, Pontiac and Rambler.
MODEL 5500-DR-8
For '57-'63 Ford, Mercury, Lincoln, Thunderbird.
MODEL 5500-F8

Complete assemblies available for most 6 and 8 cylinder cars, also 4 cylinder VW's.

kit 49.95 Plus F.E.T.

Please send information on Electro-shield and Band-spanner antennas and mounts.

Name_____

Number Street

City Zone State

BAND-SPANNER 317 Roebling Road, South San Francisco, Calif.

For further information, check number 39, on page 110

waiting for their dates and their boy friends ge sidetracked en-route to the house, drawn lik hypnotised lambs by those mysterious DA-DIT DIT-DAS and bleep-bleeps that distract the ea And as night falls and the romantic moon shine over the cow sheds, with wistful voices raised i mournful lament we wail, "Come back littl Sheepa!"

Ah well, They say 'tis better to laugh than cr so I'll follow that advice to the bitter end an will leave 'em laughing—even when the me in white coats come to take me away! Seve threes Skiddoo!

DX *[from page 54]*

under the grant aforesaid shall be subject ex clusively to the laws and sovereign authority o the United States during the terms of suc lease. . . ."

From this the possibilities of operation as new KS4 country seemed very real. A clos reading of the FCC regulations showed that letter of authorization from the Nicaragua authorities would be in order so the proper pe ple were contacted and a letter with permission t operate arrived, but designated the call YNØCI, which would not have counted as new country.

Meanwhile, back home, the FCC asked th State Dept. if the USA had any jurisdiction ov the islands. Unfortunately, while concurring tha the research was correct, the State Dept. rule that as the U. S. had never exercised this treat they would not care to "rock the boat" by gran ing an American amateur license. They woul have no objection to operating as W4XXX/YN but no operation which would imply America territory could be permitted. Therefore, onl YNØCI is operable and this would be of intere to prefix hunters.

Much time and effort went into this on Thanks to W9EVI who pushed it for sever years, and to W3PS who handled the legal en and also to the wide circle of DXers who kept close lip on the proceedings even though e thusiastic over the prospect of a new one in th Caribbean.

Aruba Award

REQUIREMENTS: Available to all amateurs wh work three (3) members of the Aruba Amate Radio Club after January 1, 1963. Contacts ca be any combination of bands or modes. On one type of award will be issued. No endors ments available. Members must have QSL car of applicant. COST: $1.00 or ten IRCs. APPL CATION: Do *not* send QSL cards. Send list sho ing complete log data and signed by two licens amateurs or one official of a recognized amate radio club, verifying that QSL cards are held b applicant. Send list with money or IRCs t Awards Manager, A.A.R.C., P.O. Box 273, S Nicolas, Aruba, Netherlands Antilles. MEMBER PJ2AE, AF, AL, AQ, AW, AZ; PJ3AC, A AJ, AL, AM, AN, AO, AP, AQ, AR, AS, A

[Continued on page 92]

LAFAYETTE RADIO ELECTRONICS

FREE!

1964 Catalog No. 640

422 Giant-Size Pages

LAFAYETTE—"WORLD'S AMATEUR & ELECTRONICS SHOPPING CENTER"

GIVES YOU '64 MORE IN

MORE HAM GEAR . . . for receivers, transmitter, as well as the smallest accessory, more amateurs everywhere make Lafayette their headquarters for all their gear.

MORE CITIZENS BAND •
MORE TEST EQUIPMENT •
MORE TOOLS •
MORE TUBES •
MORE STEREO HI-FI •
MORE TAPE RECORDERS •
MORE P. A. EQUIPMENT •

MORE SERVICE . . . more and more orders fully processed in 24 hours.

MORE BUYING POWER . . . choose from LAFAYETTE'S three Easy-Pay Credit Plans. NO MONEY DOWN — up to 24 months to pay — as little as $5 monthly.

Mail the Coupon for your FREE 1964 Lafayette Catalog

LAFAYETTE DELUXE 6-METER TRANSCEIVER HE-45-B



- High Efficiency—Up to 100% Modulation
- Superheterodyne Receiver Section for 50-54 MC
- 3-Stage, 14-Watt Transmitter
- Built-in 117V AC and 12VDC Power Supplies
- Complete with Push-to-Talk Ceramic Mike, Crystal for 50.12 MC, Detachable Mounting Bracket, All Power Cables

119.95
No Money Down
$6 Monthly
HE-45B
Made in U.S.A.

LAFAYETTE AMATEUR COMMUNICATIONS RECEIVER



KT-320 Semi-Kit **64.95** HE-30 Wired **79.95**
No Money Down
$5 Monthly
Imported

- Tunes 550 KCS to 30 MCS in 4 Bands
- Built-in Q Multiplier
- 8 Tubes plus Rectifier Tube
- 1 RF + 2 IF Stages for High Gain Reception

LAFAYETTE STARFLITE 90-WATT PHONE AND CW TRANSMITTER KIT

79.50
KT-390
No Money Down
$5 Monthly
Made in U.S.A.

- 90 Watts Phone or CW in 80 Thru 10 Meters
- Built-in 3-Section Low-Pass Filter
- Clear, Chirpless, Grid Block Keying
- Easy to Build and Operate

LAFAYETTE Radio ELECTRONICS
Mail Order & L.I. Sales Center
111 Jericho Turnpike, Syosset, L.I., N.Y.

OTHER LOCATIONS

New York, N. Y.
100 6th Ave.

Jamaica, N. Y.
165-08 Liberty Ave.

Scarsdale, N. Y.
691 Central (Park) Ave.

Bronx, N. Y.
542 E. Fordham Rd.

Newark, N. J.
24 Central Ave.

Paramus, N. J.
182 Route 17

Plainfield, N. J.
139 W. 2 St.

Boston, Mass.
110 Federal St.

Natick, Mass.
1400 Worcester St.

CUT OUT AND PASTE ON POSTCARD

LAFAYETTE Radio ELECTRONICS
Dept. CJ-3, P.O. Box 10
Syosset, L.I., N.Y. 11791

Send me the FREE 1964 Lafayette Catalog No. 640.

Name_____

Address_____

City_____ Zone_____ State_____

For further information, check number 40, on page 110

YOU ASKED FOR IT!

Here it is:

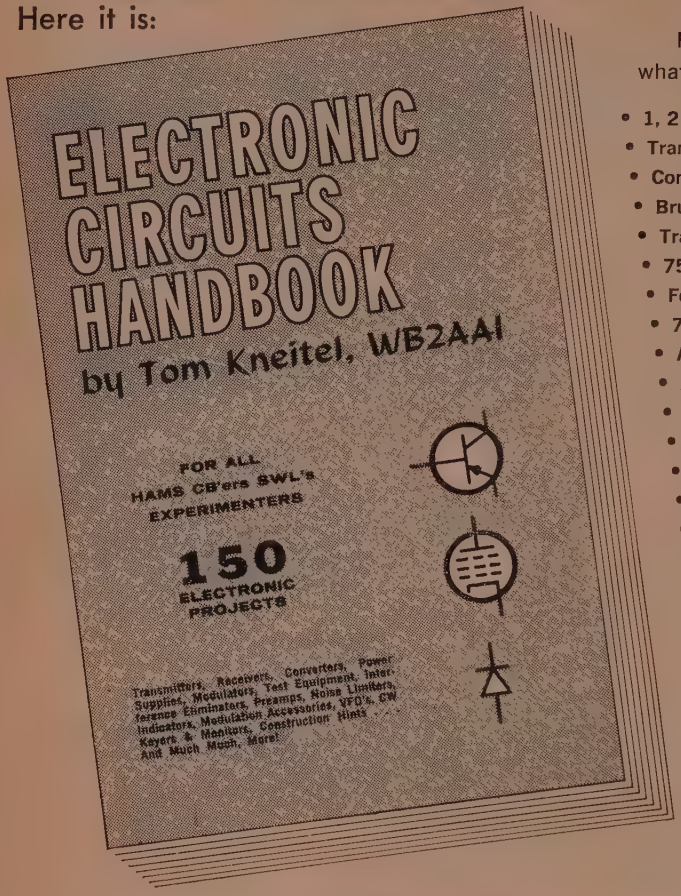

Here's just a sample of what you'll find in its chapters:

- 1, 2 and 3 tube transmitters
- Transmitting tube rejuvenator
- Comprehensive coil winding data
- Brute force power line filters
- Transistorized CW monitor
- 750 watt linear amplifier circuit
- Four good VFO circuits
- 75 Watt Novice "gallon" circuit
- All band preselector circuit
- All-nuvistor preamplifier
- TVI filters of all types
- Transistorized modulator circuits
- Mobile burglar alarm circuit
- Complete sub-miniature ham rig
- Building a free experimentors library
- A kilowatt final amplifier circuit
- Building walkie-talkie projects
- CPO to CW monitor conversion circuits
- Band-pass selectivity filter circu
- Noise limiter and squelch circuits
- A VFO frequency checker circu
- Electronic keyer circuit
- Zener diode generator circuit
- One tube receiver circuit

Here is the book we've all been waiting for! Tom Kneitel, WB2AAI, has compile a book which presents and discusses in detail 150 of the most often needed ci cuits around the shack. Novices and old-timers alike will find many valuabl circuits here ideal for construction projects. Its eleven chapters cover: construc tion, modulation circuits, transmitters, power supplies, frequency control, CW receivers/converters, receiver accessories, test gear and indicators, interferenc eliminators, and experimental circuits.

COWAN PUBLISHING CORP., BOOK DIVISION
300 West 43rd Street
New York 36, N.Y.

Sirs: My check (money order) for $_____ is enclosed. Please send me _____ copies of Electronic Circuits Handbook (cat. #121).

Name_____

Address_____

City_____ Zone_____ State_____

New York City Residents Add 4% Sales Tax

PRICE: $3.00

RUSH YOUR ORDER TODAY

AVAILABLE

NOW!

THE CQ HAM MART

MOBILE HANDBOOK

Anyone who tries to go mobile without getting this book, should think twice before going ahead. *Bill Orr, W6SAI* has put everything you need to know in this book, Build-its by the dozen . . . solutions to ignition problems, keeping the battery charged, noise . . . only *$2.95* postpaid.



CQ LICENSE GUIDE

212 pages of everything the Amateur must have to get his license and progress toward the general class ticket. Plus many additional pages of vital information for the ham operator. All this for only *$2.50.*

CQ ANTHOLOGY

Most amateurs do not have a good file of back issues of *CQ*. So we've looked back through the years *1945-52* and assembled all in one place the articles that have made a lasting stir. The issues containing most of these articles have long ago been sold out. The price is a mere *$2.00.*

THE NEW RTTY HANDBOOK

A treasury of vital and "hard to get" information. Loaded with equipment schematics, adjustment procedures, operating procedures, etc. A valuable asset to both the beginning and the experienced RTTY'er. Special section on getting started, all written by *Byron Kretzman, W2JTP*, a well known authority in the field. This book is a must for your library! Only *$3.95.*

VHF FOR THE RADIO AMATEUR

You can't afford to be without this dynamic new handbook designed with the VHF amateur in mind. Filled from cover to cover with all new and original construction material presented so that you can understand it. Written by *Frank C. Jones W6AJF*, nationally acclaimed for his VHF pioneering. Available now for only *$3.50.*

COMMAND SETS

This is a collection of reprints, containing all of the available information on the conversion of the popular "Command" transmitters and receivers into good ham transmitters and receivers. Invaluable for Novice, Technician, General, Advanced and Extra class operators. 136 fabulous pages, only *$1.50* postpaid.



SIDEBAND HANDBOOK

Written by *Don Stoner, W6TNS,* was almost one full year in the preparation of this terrific volume. This is not a technical book. It explains sideband showing you how to get along with it . . . how to keep your rig working right . . . how to know when it isn't . . . and lots of how to build-it stuff, gadgets, receiving adaptors, exciters, amplifiers. Price, only *$3.00.*

COWAN PUBLISHING CORP.
Book Division
300 West 43rd Street
New York 36, N. Y.

ANTENNA ROUNDUP	$ 3.00	☐
ELECTRONIC CIRCUITS HANDBOOK	3.00	☐
UNLIGHTED GLOBE	19.95	☐
ATLAS	15.00	☐
COMMAND SETS	1.50	☐
CODE RECORD	3.50	☐
REGULAR LOG SHEETS (100)	1.00	☐
SSB LOG SHEETS (100)	1.00	☐
HAM'S INTERPRETER	1.50	☐
TVI HANDBOOK	1.75	☐
BINDER—YEAR WANTED	4.00	☐
VHF FOR THE RADIO AMATEUR	3.50	☐
CQ ANTHOLOGY I	2.00	☐
CQ ANTHOLOGY II	3.00	☐
HI-FI BOOK	2.50	☐
SIDEBAND HANDBOOK	3.00	☐
CQ LICENSE GUIDE	2.50	☐
SURPLUS SCHEMATICS HANDBOOK	2.50	☐
DX ZONE MAP	3.00	☐
NEW RTTY HANDBOOK	3.95	☐
DIODE SOURCE BOOK	2.50	☐
USA-CA RECORD BOOK	1.25	☐
"NEW" MOBILE HANDBOOK	2.95	☐

SIRS: My check (money order) for $_____ is enclosed. Please send the following items to:

Name_____

Address_____

City_____ Zone____ State_____

New York City Residents add 4% Sales Tax

Terry Sterman, Owner, W9DIA

GET YOUR NEW

SWAN

SW-240

NOW!

Low Monthly Payments

ONLY $11.47

3 YEARS TO PAY—ONLY $5 DOWN

Terrific Trades on Single Band Swans — Or ANY Gear!

Here's all you pay each month after $5 Down Payment

	Ham Net	3 Years
Reconditioned SWAN TRANSCEIVERS		
SW 240	$320.00	$11.57
SW 12 DC DC Power Supply	115.00	3.97
SW 117 AC AC Power Supply	95.00	3.25
Models SW-120, SW-140, SW-175		$189.95

STAY ON THE AIR PLAN

Yes—Now you can enjoy your new SWAN equipment without going off the air. You need not ship your trade-in in to us until you receive our shipment, and make sure that your new merchandise is in good working condition.

AMATEUR ELECTRONIC SUPPLY

3832 West Lisbon Avenue

MILWAUKEE 8, WISCONSIN • WEst 3-3262

VISIT OR PHONE—do not write—our branch stores (they have no mail order facilities)

CHICAGO 31, ILL. 6450 Milwaukee Ave. RODney 3-1030

ORLANDO, FLORIDA 23 Azalea Park Sh. Center Phone 227-8231

IMPORTANT! Be sure to send all mail orders and inquiries to MILWAUKEE STORE, Dept. C

3832 WEST LISBON AVENUE, MILWAUKEE 8, WISC.

Ship me .....

I enclose $.....; I will pay the balance

☐ C.O.D. ☐ 1 year ☐ 2 years ☐ 3 years

I want to buy ..... and want to trade .....

What's your deal?

Name .....

Address .....

City..... Zone ..... State .....

☐ Send reconditioned equipment and sale bulletin

For further information, check number 41, on page 110

DX [*from page 88*]

KH6DKA

I'm sorry to report that KH6DKA has becc a silent key. Bill was killed in a plane crash. old timer, Bill also held W6DKA and W7DK

W6TI

W6TI, The Horace R. Greer Memorial stat of the Northern California DX Club broadc DX Bulletins at 0600 GMT Saturdays and 1 GMT and 1830 GMT on Sundays.

QTHs and QSL Managers

AP2AR—via W8QWI
EP2DM—Box 153, Shiraz, Iran
EP2RC—via K1KOM
EP2RV—via G5RV
F9RY/FC—via HB9TL
F9UC/FC—via DL9PF
FU8AF—via W6UOU
GD5SF—Box 26, Douglas, Isle of Man
HI8AT—Box 999, Sante Domingo, Dominican Republic
HI8MMN—via W2CTN
HK4JC—A. Apto Aero 4427, Medellin, Colombia
HM4AQ—via W8BF
HM5BF—via W5VA
HS1P—via W4CKB
JT1CA—Box 639, Ulan Bator, Mongolian Peoples Republic
KG4BX—via W2CTN
ex-PJ2AF—1232 W. Qu street, Hampton, Va
PZ1CE—Box 830, P maribo, Surinam
PZ1CI—Box 395, P maribo, Surinam
SVØWQ—17 Gallias Rhodes, Dodecan Greece
VE3BFC/8—via VE3B
VE3BGV/SU — U BPO, Beirut, Leban
VK9NT—via W2CTN
VP2AV—via W2CTN
VP2CC/C—via W8EW
VP5BB—via W3MRR
VP5LA—Navy 104, FPO, N.Y., N.Y.
VR1H—via VR2EH
VR4CU—via W6UOU
ZS2MI—via ZS1OU
5X5JG—Box 355, K pala, Uganda
73, Urb, W2I

Sideband Contest [*from page 42*]

VE3ES	"	12,852	204	63
VE4XO	"	52,880	452	117
VE6TF	"	43,878	426	103
VE6AAV	"	12,160	190	64
VE8RG*	"	33,462	338	[illegible]
K4JDC/VO1*	"	46,400	464	100
Canal Zone				
KZ5LC	14	32,712	348	94
Costa Rica				
TI2PI*	A	107,118	1082	[illegible]
Guatemala				
TG9SC	14	48,400	512	95
Haiti				
HH2J	14	17,596	332	53
Mexico				
XE1SN	14	47,616	744	64
Puerto Rico				
KP4BMA	21	27,168	566	48
KP4BFA	14	37,248	582	64

Africa

Angola				
CR6CA	14	5600	160	35
Congo				
9Q5RK*	14	1380	60	23
Egypt				
VE3FFW/SU	A	8716	136	67
Lybia				
5A1TW	A	121,304	804	126
Morocco				
CN8IU*	14	88,616	836	106
Mozambique				
CR7CI*	14	2176	68	32
Somalia				
6O1WF	14	12,200	200	51
South Africa				
ZS6VX*	14	21,576	248	87
Sudan				
ST2AR*	14	19,908	316	63
Swaziland				
ZS7R	14	7098	182	39

Asia

Israel				
4X4DK	3.5	19,008	352	54
Japan				
JA3IW*	14	13,452		
JA1ADN*	"	12,400		
JA6AV*	"	3525		
JA1ANG*	"	3102		
JA1NJ	7	7296		
Korea				
HL9KH	14	313,728		
Maldives				
VS9MB	14	60,138		
Okinawa				
KR6BP	14	13,680		
U.S.S.R.				
Asiatic				
UW9CC	14	56,180		
UAØEH	"	53,010		
UA9KCE*	"	23,700		
UAØEK	"	19,276		
UAØSK	"	19,240		
Azerbaijan				
UD6BR	14	12,272		
Georgia				
UF6FB*	A	77,268		
Kazakh				
UL7JA	A	45,780		
UI8AG	14	33,856		

Europe

Aland Island				
OH5TM/Ø*	A	12,200		
OH2TJ/Ø*	"	10,044		
OH2TH/Ø*	"	9720		
Austria				
OE1RZ	A	103,660		
Belgium				
ON4AD	A	72,136		
Czechoslovakia				
OK3CDR*	A	30,272		
OK2XA	"	22,680		
OK1ADP*	"	22,346		
OK1KW*	"	10,530		
OK1JX	14	13,224		
OK1MP	"	10,812		
OK3DG	"	2880		
OK1VE	3.5	3626		
OK1AWJ	"	3028		
Denmark				
OZ5JT*	A	58,740		

"BECAUSE WE'RE STILL NOT THE LARGEST COLLINS DEALER WE HAVE TO GIVE YOU A BETTER DEAL AND MORE PERSONALIZED SERVICE"

Before You Buy Collins With or Without a Trade-In Get Our Deal!

- Guaranteed Personal Service—all our male and some of our female employees are licensed active hams
- Sales and Service Personnel Collins Factory-Trained
- Full 36 months to Pay
- $5 or Your Trade is Your Down Payment
- Large Stocks Assure Immediate Shipment

DOC, W 9 H J S, manager of our Chicago store and STEVE, W 9 E A N, manager of our Milwaukee store hold daily 6 and 2 meter SSB Q S O's 90 miles apart using Collins 62S-1 SSB converters.

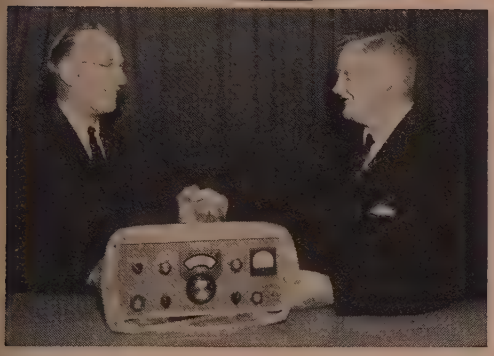

Working Collins displays in all our three stores. Shown here is the complete Collins station at our Chicago store.

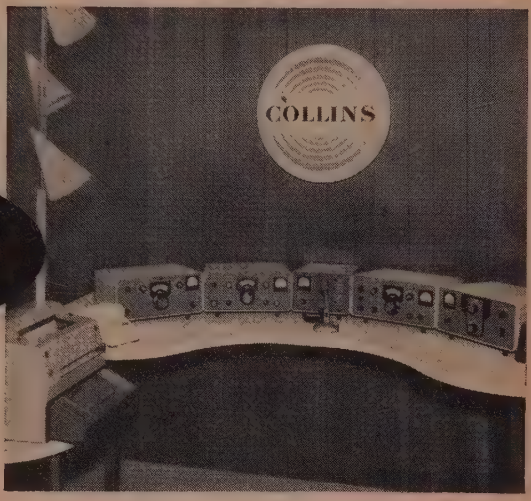

CHICAGO HAM WINS 75S3

Here is Howard S. Wayman, W9GVA, 6760 N. Ionia Ave., Chicago, Illinois, accepting the 75S3 Receiver he won at the Big Open House held recently at Chicago Store.

AMATEUR ELECTRONIC SUPPLY

Steve W9EAN

MILWAUKEE 8, WIS.
3832 West Lisbon Ave. • Phone We. 3-3262
Hours: Monday and Friday, 9 A.M. to 9 P.M.
Tuesday, Wednesday & Thursday, 9 A.M. to 5:30 P.M.
Saturday, 9 A.M. to 3 P.M.

Doc W9HJS

CHICAGO 31, ILL.
6450 Milwaukee Ave. • Phone: Ro. 3-1030
Hours: Monday, Wednesday & Thurs., 12 P.M. to 9 P.M.
Tuesday & Friday, 12 P.M. to 5:30 P.M.
Saturday, 9 A.M. to 3 P.M.

Phil W9DVM/4

ORLANDO, FLA.
23 Azalea Pk. Shop. Ctr. • Phone 277-8231
Hours: Monday, Tues., Thurs. & Friday, 1 P.M. to 9 P.M.
Wednesday, 1 P.M. to 5:30 P.M.
Saturday, 9 A.M. to 5:00 P.M.

IMPORTANT! Send all Mail Orders and Inquiries To: Terry, W9DIA at our Milwaukee store, c/o Department (C)
Get Our Quote Today, No Obligation

Terry: I want to buy_____

I have to trade_____(what's your deal?)

STAY ON THE AIR PLAN
Not only will I give you a terrific trade-in allowance, but you can keep your equipment until you receive your shipment.

Ship Me: _____

I enclose $_____ and will pay balance (10% deposit)
☐ C.O.D. ☐ 1 Year ☐ 2 Years ☐ 3 Years

If ordering on terms, please list following information on separate sheet and enclose with this order: Name, address, age, married? children? Employed by? Salary? How long? Own or Rent Home? To whom renting? or buying from? Wife employed? Own car?—who buying from? Three to five credit references. The more information you give, the faster we can approve your credit.

EVEN IF YOU'RE NOT ORDERING TODAY, SEND ABOVE INFORMATION FOR ATTRACTIVE CREDIT CARD

NAME _____

ADDRESS _____

CITY _____ STATE _____

☐ Check for latest reconditioned bulletin.

For further information, check number 42, on page 110

Surplus Specials At SELECTRONICS

50 Foot ANTENNA MAST

50 feet high extended and 10 feet long when telescoped. 5 sections of weatherproofed steel. Base dia. 2½". Top sect. dia. 1". Ideal for temporary (field day) or permanent installation. BRAND NEW. Price $19.95

DUMMY ANTENNA
Type A-27

Use as dummy load to tune up ham transmitters or citizen band units. Will handle up to 50-watts-intermittent or 15 watts continuous. Completely shielded. Brand new. Contains Cardwell variable cap. and 2 W-L pur resistors. Box is ideal for small eqpt. Price ..... $1.00 or three (3) for $2.00

SLOPING PANEL CABINETS—BRAND NEW—GREY

DIM: 15" long, 8½" slope, 4½" height in front of slope, 12" deep. Price ..... $1.50 ea.

ART-13 TRANSMITTER

Clean & like new with all tubes. Power output is a very conservative 100 watts. Power required is 23 v DC @ 100 a. 400VDC @ 225 Ma & 1250 VDC 2 250 Ma. See power supply below. Weight 70 lbs. Price with tubes $39.95

RDZ POWER SUPPLY

D.C. Power supply. Mfg. for the Mars for RDZ receiver. Input 115 VAC 50/60 CY. Output 300 VDC at 200 Ma. well filtered thru two 8 HY 200 ma. chokes and two 10 mfd 600 oil caps. Also has a 150 VDC supply thru a VR 150. 6.3 VCT at 10 amps and 12 vac at 3amps. Meas. 5½ x 9 x 17. Complete with tubes. Shpg. Wt., 64 lbs. Cat No. C-6262 ..... $14.95

SUPER PRO POWER SUPPLY

In either rack or cabinet mounting type—excellent condition. Shpg. Wt. 60 lbs. Cat. No. C-6609 ..... $12.95

SPARE PARTS KIT

This repair kit was originally issued for servicing Wilcox Electric Co. Type CS390 Control Equipment which was designed for the remote control of 10 transmitters, 8 receivers, 2 modulators and 2 rectifiers. The kit includes books with photos and diagrams for a dual channel audio-amplifier, microphone pre-amp-limiter and a 1000 cycle sine wave generator.
Contains enough parts to build 2 complete P/S Contains over 100 brand new parts:
C-6360 ..... $9.95

FIELD TELEPHONE SETS

Type EES. Complete in carrying case. Shpg. Wt. 18 lbs. EX-COND. C-6443. ..... $7.95 2 for $15.00

PHONO TURNTABLE & PICKUP

A very fine unit for Public Address Type work. Pickup: Audax magnetic type, Motor data: General Industries Model No. 2 DG 4, Type: 46500, RPM: 78 & 33⅓, 115 volts 60 cycle. Unit may be operated from 220V with built-in transformer. Shpg. Wt., 50 lbs. Cat. No. S-6605 ..... $9.95

MULTIPLE OUTPUT VOLTAGE REGULATED POWER SUPPLY

Here is a very fine little power supply for Receivers, Converters, Test Equipment, etc. Outputs are all well filtered. VR tube regulated. 250V @ 30 ma., 240V @ 30 ma., 150V @ 30 ma. 400V @ 60 ma not regulated. 6.3V AC @ 4.5 amps or remove regulators and get 400V at 140 ma with 5 U4G or 125 ma with 5Y3, uses 1-5Y3, 2-OD3/VR 150, 1-OC3/V105, OB3/VR 90 contains a 750 VCT @ 150 ma power Xfmr. and a 7 hy @ 140 ma filter choke plus filter capacitors and 4-25W adjustable resistors and a 25 W pot plus a Mallory 4W pot. All in a nice grey crackle cabinet with top lid measures 8" H x 16" W x 8" D. Used-Good Conditioned with tubes. Shpg. Wt., 40 lbs. Cat. No. C-6345 ..... $11.50

RCA WO78-A OSCILLOSCOPE

Vert. amp. freq. response wide band. 3 cps to 4.5 mc within—1 db. narrow band 3 cps to 500 KC within—3 db.
Horiz. amp. freq. response 3 cps to 1.0 mc within—6 db.
Deflection sensitivity: Vert. amp. wide band 100 MV pp/inch narrow band 10 MV/inch Horiz. amp. 200 MC pp/inch
Sweep freq. Variable 10 cps to 100 KC fixed 60 cps. & 15750 cps.
Built-in calibrators & freq. compensated attenuators. Cat. No. C-6663 ..... $69.95

REMOTE CONTROL AMPLIFIER

Brand new. Type CAY-23304A. Power req'd 117 VAC-DC 37 Watts
Audio power output 1.3 Watts 600 Ohms 250-350 cycles + 2 DVB
Excellent for use as intercom master station or small paging system.
Contains telephone type mike & earphone.
New, with spare parts $12.95
New, less spare parts 10.95

PANEL METERS ALL SIZES AND TYPES

RELAY RACKS—Standard 19" ALL TYPES REGULAR & HEAVY DUTY and DELUXE

SEND FOR FREE CATALOG

All prices are F.O.B. our warehouse Philadelphia, Pa.
All merchandise accurate as to description to the best of our knowledge.
Your purchase money refunded if not satisfied.
Terms: Our terms are cash. All trade and cash discounts have already been deducted in our catalog quotations. All prices are net. F.O.B. Phila.
SELECTRONICS buys surplus inventories, close-outs, overstocks . . . anything electronic. Please put us on your bidders list.

MINIMUM ORDER $5.00

SELECTRONICS *1206 S. Napa Street Philadelphia, Pa. HO 8-7891—HO 8-4645*

For further information, check number 43, on page 110

OZ4RT*	....	"	16,498	226	73
OZ5KG	....	14	71,912	712	101
OZ7FG	....	"	69,720	664	105
OZ8RH	....	3.5	11,682	198	59
England					
G4CP	.....	A	160,556	979	164
G3NFV*	....	"	42,946	394	109
G2ABB	....	"	22,960	280	82
G3NMH*	..	14	46,200	462	100
G3KZQ	....	"	41,160	490	84
G3MEA	....	"	35,192	332	106
G3OIZ	.....	"	12,862	218	59
G3NWV	....	"	3774	102	37
G3PEU	....	3.5	14,006	298	47
Finland					
OH2AA	....	A	43,466	422	103
OH2PM/1		"	43,424	472	92
OH2ER	....	14	38,522	374	103
OH2RZ	....	"	34,740	386	90
France					
F3II	.....	A	3072	128	24
F7BI*	.....	14	65,076	748	87
Germany					
DL3LL	.....	A	334,110	1806	185
DL2DM	....	"	66,878	562	119
DJ2UU	....	"	23,688	376	63
DL9PU*	....	"	23,184	276	84
DL7EN*	....	"	12,276	186	66
DL9EM	....	"	7668	142	54
DJ1ZG	.....	14	98,298	762	129
DL5AO	....	"	92,800	928	100
DJ0GT	....	"	57,200	572	100
DL1KN	....	"	11,160	248	45
DJ5LA	.....	"	3774	102	37
DL6JJ	.....	"	2700	58	30
Hungary					
HA9OZ	.....	14	20,160	280	72
Iceland					
TF2WHB*	..	14	159,444	1236	129
Ireland					
EI8P	.....	14	93,000	744	125
Italy					
I1CWN*	....	A	64,896	624	104
I1DFD*	....	14	68,112	774	88
IT1TAI	....	"	58,240	560	104
Jan Mayen					
LA8SE/P	.	14	7752	152	51
Luxembourg					
LX1DE	.....	14	17,228	292	59
Netherlands					
PAØHBO	....	14	53,016	564	94
Northern Ireland					
GI6TK*	....	A	22,278	282	79
Norway					
LA5HE	.....	A	24,650	290	85
LA5LG	.....	"	11,264	176	64
LA1NG	.....	14	22,176	308	72
LA8WF	.....	"	15,904	224	71
Poland					
SP9FR	.....	A	87,098	1053	107
SP5HS	.....	14	27,924	358	73
Roumania					
YO3ZA	.....	14	28,044	342	82
Scotland					
GM3JDR*	..	14	44,200	442	100
GM3CIX*	..	"	37,400	440	85
Spain					
EA7ID	.....	A	46,750	550	85
EA4GZ*	....	14	128,188	878	146
Sweden					
SL6BH*	....	A	34,182	422	81
SM5CBI	....	"	25,730	310	83
SM5BLA	....	14	193,280	1208	160
SM6SA	....	"	114,048	1152	99
SM5BOU	..	"	56,784	624	91
SM7AIA*	..	"	23,142	406	57
SM7ACB*		"	12,288	192	64
Switzerland					
HB9UD	.....	A	14,910	213	70
HB9ZY*	....	14	82,944	648	128
U.S.S.R. European					
UA3CR	.....	A	186,048	1216	153
UA3FG	.....	"	129,750	1038	125
UA3DR	.....	A	43,460	410	106
UA1MU	....	14	122,104	892	137
UW3UF*	..	"	121,160	932	130
UA4IF	.....	"	43,264	416	104
UA6FD	.....	"	24,568	296	83
UA3FT	.....	"	19,856	272	73
UA1OE*	....	"	15,912	234	68
UA3SE	.....	"	13,888	224	62
UA3FU	.....	"	8424	156	54
UA3DB	.....	"	4446	114	39
UA4HP	.....	"	4376	128	42
UA1PQ*	....	"	1395	45	31
Esthonia					
UR2KAT*	..	A	40,480	460	88
UR2AT*	....	"	35,260	410	86
Kaliningrad					
UA2AW	....	A	217,288	1384	
Latvia					
UQ2FX*	....	A	23,738	286	
UQ2AZ	.....	"	17,554	262	
UQ2AS	.....	"	14,840	212	
Ukraine					
UB5WF	....	A	161,768	1108	
UB5FJ	.....	"	121,433	956	
UB5KKA	..	"	58,140	510	
UB5EF	.....	14	8160	170	

Oceania

Australia					
VK6RU*	....	A	9800	140	
VK5QR	.....	14	8732	148	
VK2APK	....	"	7304	166	
VK2EL	.....	"	2408	86	
Christmas Island					
VR3O	.....	14	108,658	898	
Guam					
KG6AJB	....	14	62,678	518	
Hawaii					
KH6BLX	....	A	57,120	816	
KH6EKO	..	14	44,872	568	
KH6FBJ	..	"	41,080	520	
KH6EDW	..	"	9200	200	
Marshall Islands					
KX6AE		14	29,946	322	
New Zealand					
ZL1AIX	..	A	145,520	1258	
ZL1AAS	..	14	30,132	378	

South America

Brazil					
PY2QT	.....	A	138,656	1238	
British Guiana					
VP3HAG	....	A	19,470	354	
Colombia					
HK4EB	....	A	53,784	498	
Netherlands Antilles					
PJ2AA	.....	A	152,218	1258	
PJ2CG	.....	14	29,568	704	
Surinam					
PZ1AX	.....	14	42,000	400	
Venezuela					
YV5AHG	.	21	7326	228	
YV5AMH		14	31,682	432	
YV5BPG*	..	"	8640	168	

Multi-Operator

GB3RAF	..	A	232,140	1468	
			G2BVN, 3DAH, GJQ		
				5UG, G	
UP2KNP	..	A	36,960	448	
				UP2OK, NK	
DLØKW	....	A	33,375	378	
				DJ8EQ	
UQ2KCC	..	A	20,944	278	
				Club s	
GD6UW*	.	A	12,322	208	
			G3PIT, PWT, RSE		
UA1KBW	..	14	177,282	1208	
				Club s	
I1DFH*	....	14	112,644	898	
			WA4HIW, WB2FXC,		
SVØWY	....	14	106,240	838	
			W5TMA, WA8GAG,		
UD6KAR	...	14	60,960	508	
				Club s	
UA3KYA	....	14	28,730	338	
				Club s	
LK1KSZ	.	14	19,560	328	
				LZ1KSZ	

We sincerely appreciat time and trouble taken b following fifty stations submitted check l W2ODA, WB2AKW, W4 K4NXD, W5EDX, W6 WA6WPG, W7UXP/ W8GDQ, W9VSO, G3 GI4RY, GB2SM, HA2 JA1CPM, FSL, 4AQR, KG6ALD, KP4BJD, LA MM, U; OH1SH, 2QI, OK1UT, 3KJF; PAØ PJ5CH, SM2BYN, 3AF, AZU, CZQ, IC, KV, UA3AET, 9BZ, UC2KAB, UG6 UM8KAB, VK2AQJ, VK3HL, YV5AKP, Z RH; 4U1ITU.

$550.00

300 WATTS P.E.P.

DRAKE TR-3

SIDEBAND TRANSCEIVER

The TR-3 is another Drake design bringing the radio amateur "more performance at less cost, through engineering."

The TR-3 is engineered for optimum performance on upper or lower sideband, with AM and CW included for the "ham" who likes variation, or who desires to contact stations limited to these modes.

Compact and lightweight, it is ideal for limited space, for mobile, for vacations, and for portable excursions. With 300 watts P.E.P. input it will give a good account "barefoot" and will drive high power "ham" linears. The accessory RV-3 Receiving VFO solves the problem of working DX and stations operating on frequencies other than your transmitting frequency.

TR-3 ACCESSORIES



REMOTE RECEIVING VFO
Model RV-3 .....$99.95
Used with the TR-3 to permit reception on frequencies other than your transmitting frequency.

MATCHING SPEAKER
Model MS-3 .....$19.95
Contains a 5 x 7 inch heavy magnet speaker and connecting cable. Styled to match TR-3 Transceiver.

POWER SUPPLIES
AC Power Supply
Model AC-3 $79.95
Designed to supply all voltage and current requirements for the TR-3.

10% DOWN

$55.00 ($550.00)

TR-3 SIDEBAND TRANSCEIVER

ORDER NOW FROM HAMATEUR HEADQUARTERS

THE LEW BONN CO. 67 South 12th St., Minneapolis 3, Minn.

- ☐ Place my order for IMMEDIATE DELIVERY of the NEW TR-3 SIDEBAND TRANSCEIVER.
- ☐ Remote Receiving
- ☐ Matching Speaker
- ☐ Power Supplies

Enclosed find $ _____

- ☐ Please send more details & literature.

Distributors of Nationally Famous Amateur Equipment
CALL, WRITE or USE COUPON
Dept. CQ-10 ATT: Joe Hotch FEDERAL 9-6351

Name_____ Call Letters_____

Address_____

City_____ Zone____ State_____

For further information, check number 44, on page 110

W9DIA—Terry

ONLY $13.17 a month — with just $5.00 DOWN delivers a New NATIONAL NCX-3 TRANSCEIVER FOR 80-40-20



3 YEARS TO PAY!

Get Terry's Terrific Trade-In Deal!

Model	Type	Price	Monthly Payments after $5.00 down (3 years)
NCX-3	Transceiver	$369.95	$13.17
NCXA	AC Supply	110.00	3.79
NCXD	DC Supply	119.95	4.15

All other National equipment also in stock—same EZ terms apply.

We have Complete National Line in Stock at A.E.S. Any item can be purchased for $5 down; up to 3 years to pay. Order today—Just send $5.00—tell us how much time you need to pay.

STAY ON THE AIR PLAN—I will give you a good trade-in allowance for your old equipment, and you can use it until you get my shipment. Then send me your trade-in.

AMATEUR ELECTRONIC SUPPLY

3832 West Lisbon Avenue
MILWAUKEE 8, WISCONSIN • WEst 3-3262
VISIT OR PHONE—do not write—our branch stores (they have no mail order facilities)
CHICAGO 31, ILL. 6450 Milwaukee Ave. RODney 3-1030
ORLANDO, FLORIDA 23 Azalea Park Sh. Center Phone 227-8231

IMPORTANT! Be sure to send all mail orders and inquiries to MILWAUKEE STORE Dept.C
3832 WEST LISBON AVENUE, MILWAUKEE 8, WISC.

Ship me .....
I enclose $..... ; I will pay the balance
☐ C.O.D. ☐ 1 year ☐ 2 years ☐ 3 years
I want to buy ..... and want to trade
..... What's your deal?
Name .....
Address .....
City ..... Zone ..... State .....
☐ Send reconditioned equipment and sale bulletin

For further information, check number 45, on page 110

Prop. [*from page 55*]
tenna angles less than 20 degrees, as compared t
a free space dipole reference antenna. Effectiv
radiated power, or e.r.p., is equivalent to th
power fed into the antenna, multiplied by th
power gain of the antenna.

800 watts double-sideband a.m.
400 watts single-sideband a.m.
200 watts c.w.

To use the Charts for other values of e.r.p *raise* the quality figures shown in the "Las Minute Forecast" by one letter for each *increas* of 10 db in e.r.p., and *lower* the figures by on letter for each 10 db *decrease* in e.r.p. For ex ample, a c.w. effective radiated power of 2,00 watts would raise a circuit quality rating fro C (a fair opening) to B (a good opening), *et*

All times shown in the Charts are Loc Standard, using the 24-hour time system. In th system midnight is shown as 00, while 01 is A.M., 02 is 2 A.M., *etc.* Noontime is shown as 1 while 13 is 1 P.M., 14 is 2 P.M., *etc.* The Easter USA Chart can be used in the 1,2,3,4, and amateur call areas; the Central USA Chart i the 5, 9 and Ø areas, and the Western Chart i the 6 and 7 areas. The Charts are derived fro basic ionospheric data published by the Centr Radio Propagation Laboratory of the Nation Bureau of Standards, Boulder, Colorado.

Contest Guide

The following are examples of how the Prop gation information contained in this column ca serve as a useful guide for piling up points du ing the Contest periods. From data appearing i the Charts, the following operational schedu can be devised which shows the optimum tim for working various areas of the world on th 20 meter band. A Central USA QTH is selecte for the example.

20 meter Work-Plan for Central USA QTH

Time (CST or MST)	*Areas to Which Openings are Optimu*
00—06	Nothing optimum, a good time to slee
06—09	Southern Europe, North Africa, Centr and Southeast Asia, Far East, Paci Islands, New Zealand, Australia, Sou America, Antarctica.
09—12	Western, Central, Eastern and Southe Europe, Eastern Mediterranean and Arabi North Africa, Australia.
12—15	Western, Central and Southern Euro North Africa.
15—18	Central and South Africa, South Americ
18—21	Central and South Africa, Central As Far East, Pacific Islands, New Zealan South America.
21—00	Southeast Asia, Pacific Islands, Ne Zealand, Australia, South America, A arctica.

The following is a typical *multi-band* ope ational schedule. It has been devised from th Propagation Charts for an Eastern USA QT The schedule shows the time and bands wh propagation conditions are expected to be op mum to various parts of the world.

Multi-Band Work Plan for Eastern QTH

Time (EST)	*Best Band*	*Areas Open*
00—03		Nothing optimum, a good time to sle

"Hi! I'm Lowell McNeil, W9PTN, president of the West Racine Bank in Racine, Wisconsin. As a banker, I can assure you that Collins radio equipment is an excellent investment. It has quality, performance and top trade-in value. These are the things we bankers look for. Many banks offer special finance rates on Collins equipment, just as Terry is offering here. I have KWM-1 at the office and a complete Collins station at home. I've been 'all-Collins' for many years."

It takes a banker to know a good buy

. . . Collins

S S B EQUIPMENT . . .

and it takes Terry, W9DIA

to come up with a LOW LOW 5% CARRYING CHARGE

LOW AS 10% DOWN PAYMENT — TAKE 1-2-3 YEARS TO PAY!

	Amateur Net	(1 yr.) (10% Down)	(2 yrs.) (20% Down)	(3 yrs.) (30% Down)
30L-1 Linear Amplifier	$ 520.00	$ 40.95	$ 19.06	$ 11.62
30S-1 Linear Amplifier	1556.00	122.53	57.05	34.79
32S-3 Transmitter	750.00	59.06	27.50	15.81
62S-1 VHF Converter	895.00	70.48	32.81	20.01
75S-3 Receiver	680.00	53.55	24.93	15.20
75S-3A Receiver	750.00	59.06	27.50	15.81
KWM-2 Transceiver	1150.00	90.56	42.16	25.71
KWM-2A Transceiver	1250.00	98.43	45.83	27.95
51J-4 Receiver	1464.00	115.29	53.68	32.73
51S-1 Receiver	1828.00	143.95	67.02	40.87
351D-2 Mobile Mount	120.00	9.45	4.40	2.68
MP-1 14V DC Power Supply	198.00	15.59	7.26	4.42
PM-2 Portable Power Supply	150.00	11.81	5.50	3.33
CC-2 Carrying Case	85.00	6.69	2.99	1.90
CC-3 Carrying Case	107.00	8.42	3.92	2.28
516F-2 AC Power Supply	115.00	9.05	4.21	2.57
312B-4 Speaker Console	195.00	15.35	7.15	4.36
312B-5 PTO Console	350.00	27.56	12.83	7.82
399C-1 PTO Speaker	164.00	12.91	6.01	3.66

HIS LOW 5% FINANCE RATE APPLIES
NLY TO NEW COLLINS EQUIPMENT
PURCHASED WITHOUT TRADE IN

Only Terry Offers Low 5% CARRYING CHARGE

AMATEUR ELECTRONIC SUPPLY

Three Stores to Serve You

PLEASE SEND MAIL ORDERS TO MILWAUKEE STORE

3832 West Lisbon Ave., MILWAUKEE 8, WIS.
Phone WEst 3-3262

CHICAGO 31, ILLINOIS
6450 Milwaukee Ave.,
Phone RO 3-1030

ORLANDO, FLORIDA
23 Azalea Park
Shopping Center
Phone 277-8231

IMPORTANT: Send all mail orders and inquiries to:
AMATEUR ELECTRONIC SUPPLY Dept. C
3832 W. Lisbon Ave., Milwaukee 8, Wisconsin

Ship me .....

I enclose ..... I will pay the balance

☐ 1 Year (10% Down) ☐ 2 years (20% Down) ☐ 3 years (30% Down)

This special low 5% interest rate subject to withdrawal without notice.

Name .....

Address .....

City ..... Zone ..... State .....

☐ Send latest reconditioned equipment bulletin.

For further information, check number 46, on page 110

NOW! IN STOCK

DRAKE 2-B

"The most talked about HAM RECEIVER"

2-B Receiver
$279.95
Q-Multiplier/Speaker
2-BQ $39.95

ORDER NOW!
Send check or money order. We prepay express charges.

WRITE OR CALL: BILL BRURING
W9ZSO
COMMUNICATIONS EQPT. CO.
518 STATE ST., LA CROSSE, WISCONSIN

For further information, check number 47, on page 110

BACK ISSUES FOR SALE $1.00 per copy

1950—Jan., July, Oct.
1951—All issues, except Nov.
1952—All issues, except June, Aug.
1953—All issues, except May, July, Dec.
1954—All issues, except Feb.
1955—All issues, except Nov.
1956—All issues, except April
1957—All issues, except Jan., Feb., May, and Nov.
1958—All issues, except Jan., June, July, Sept., Oct.
1959—All issues, except Jan. and June
1960—All issues, except May
1961—All issues
1962—All issues, except Jan.
1963—All issues

BC-603 Conversion article (Sept. & Oct., 1958 CQ) Reprints available at 50¢ per set.

CQ Magazine
300 West 43rd St., New York 36, N. Y.

03—06	40	Central & Southeast Asia, Far Ea Pacific Islands, New Zealand, Austral South America, Antarctica.
06—09	20	Europe, North Africa, Central As Southeast Asia, Far East, Pacific Islan New Zealand, Australia, South Ameri Antarctica.
09—12	15	Europe, Africa, Eastern Mediterrane and Arabia, South America.
12—15	15	Europe, Africa, South America.
15—18	20	Europe, Africa, South Amerca.
18—21	20	Central & South Africa, Central a Southeast Asia, Far East, Pacific Islan New Zealand, South America, Antarcti
21—00	40	Europe, Africa, South America.

Similar type operating schedules can be d vised for other operating conditions and oth QTHs.

WWV Transmission

Check WWV and WWVH propagation tran missions for latest information on propagati conditions during the Contest periods. WW broadcasts propagation information on 2.5, 10, 15, 20 and 25 mc at 19½ and 49½ minut past each hour. WWVH broadcasts similar i formation on 5, 10 and 15 mc at 9 and 39 mi utes past each hour. The WWV forecasts are f north-Atlantic circuits, while north-Pacific for casts are given on WWVH.

The WWV and WWVH propagation forecas consist of a letter-number combination tran mitted in slow Morse Code. The letter "N" i dicates that conditions at the time of broadca are normal; the letter "U" that conditions a presently unsettled or erratic, and the letter "V that conditions are disturbed and a radio stor is in progress. The number indicates the avera quality of propagation conditions forecast f the next few hours, as follows: 1—useless, 2- very poor, 3—poor, 4—poor-to-fair, 5—fa 6—fair-to-good, 7—good, 8—very good, 9- excellent.

CW Section Forecast

The Propagation Charts appearing in th month's column are valid for *both* the phone a c.w. sections of the Contest. Be sure to reta the Charts for use during the c.w. section. Ne month's column will contain Short-Skip Prop gation Charts for November and December.

Propagation—Sunspot Research

The FCC has granted approval for a prop gation research program to be conducted K6HME and W6MGI during the period Augu 16 through November 16, 1963. The expe ment will investigate the actual propagati characteristics of 10 meters as the sunspot cyc approaches its minimum phase. A beacon tran mitter will be operated 24 hours daily on 28.6 m modulated by a 600 cycle tone interspersed wi the message "Beacon QSL K6HME Post Offi Box 20121 San Diego, Calif." All radio amateu hearing the beacon signal should send time observation and signal reports to K6HME. Mo on this project next month.

73, George, W3AS

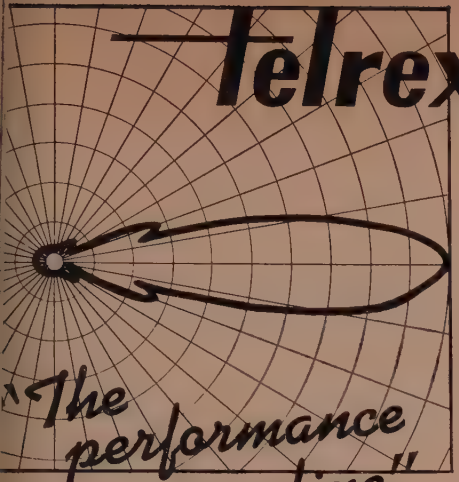

"BEAMED-POWER" ANTENNAS and ANTENNA SYSTEMS

The Choice of the Discriminating Communication Engineer . . . the Man who Never Settles for Anything Less than THE-VERY-BEST!

You too — can enjoy World renowned TELREX performance and value!
Send for PL77 condensed data and pricing catalog, describing the World's most Popular antennas from $6.95 to $999.00. Expanded data sheets — your favorite band, also available.

"— with a MATERIAL DIFFERENCE!"

ANTENNAS SINCE 1921 Telrex LABORATORIES
Communication and TV Antennas
ASBURY PARK 25, NEW JERSEY, U.S.A.

For further information, check number 48, on page 110

Novice [*from page 58*]

pity, just a hobby. How about teaching some handicapped person enough code and theory to pass his amateur exam for Christmas and help him get going, it might be his best Christmas ever.

It Still Keeps Going

This morning I made my contact of the day. Nothing unusual about that, as I have been making a v.h.f. contact every day for 3059 days, except I called CQ and Pat, W8TN came back for his first contact with a Heath Shawnee, followed by QSOs with three YL-OM teams: W9HLS, then WA9AXT/WN9FOK, Ralph and Lucille; K9EEE, Dot and OM (didn't have his call); W8UX/WN8HWL, Bill and Marion. Then that feller that always makes you smile inside, ole Bob, K8VOT finished a very fine couple of hours ragchewing. That is the first time I ever worked three YL-OM teams in succession and the first time for two 2-letter calls at one setting.

The local amateur fraternity used to tell me there was no activity on two meters. If so, how did I make all those contacts for 3059 days? Incidently my first six meter contact was with the first station I heard on six, Phil, W5SFW, Amarillo, Texas. I believe we could relieve some of that congestion on the lower bands by shifting some of the local ragchews to the 144 or 220 mc bands. We would have less QRM on the low bands and more occupancy of the high bands. Had some of you squawkers ever thought of doing more work in improving your equipment and operating higher in the amateur spectrum and doing less squawking about the other fellow. How about some of you fellows that live where there is no channel 2 moving up in the six meter band? You can still tune the low end for us here in channel 2 land and we'll listen for you if you are there. Why *not* use 147 to 148?

Help Wanted

If you have a little spare time to help some one get his ham ticket you might consider a letter to one of those aspirants in the column. Maybe the future ham has a tape recorder or phonograph and you could tape some lessons for him.

Those needing help are:

John Knolke, R.R. 1, Norwalk, Iowa, 50211, needs help with code and theory.

Joseph M. Cassano, 515 Brighton Street, Bethlehem, Pennsylvania, needs help with code and theory.

Bruce D. Epple, Hq and Hq Co. Troop Command USASCS, Fort Monmouth, New Jersey, need help with the theory.

Jay Szerencsy, 737 Vermont Street, Brooklyn 7, New York, would like to locate a local club giving code and theory lessons for the amateur license.

George J. Masciarelli, P. O. Box 297. Clinton, Massachusetts would like to obtain diagrams for the TCS-11, TCS-12 and TCS-15 surplus units.

Dave White, P. O. Box 45, Grafton, West Virginia would like to know of any amateur nets around Grafton.

Howie Axelrod, 183 Holmesdale Avenue, Albany 8, New York could use some help for the test.

Joe Sims, 1224 Forestdale Blvd, Birmingham 14, Alabama is an Explorer Scout and 16 years old. He could use some help.

Gayle Byrd, 11 yrs. old, P. O. Box 275, Mango, Florida says that her brother wrote NOVICE and I put his name in Help Wanted. The local hams as well as VK4NS are helping her brother, so she would now like help getting *her* license. Please fellows and gals, let's help this lady in distress.

I could use some letters and more pictures. This column is for both Novices and Technicians. Good luck and plenty of good signals reports.

73, Walt, W8ZCV

DOW-KEY
DK-60 SERIES

COAXIAL RELAYS

DK60 -G2C

Size 2¾x3¾x1⅛
Less than 9 oz.

4 VERSATILE MODELS, AC or DC OPERATION

UHF, N, BNC TNC and C CONNECTORS

COIL RATINGS: 6, 12, 24, 28, 32, 48, 110 and 220 V DC @ 2 watts. 6, 12, 24, 110 and 220 V AC @ 6 VA, 50-60 cps. Special coil voltages available on request. Coil terminals are solder connections feed-through insulators.

r.f. RATINGS: 1 kw power rating to 500mc. 20 watt power rating to 500 mc in DK60-G and DK60-G2C in de-energized position. The DK60-G and DK-60-G2C have a special isolation connector in the de-energized position to reduce crosstalk to a minimum.

AUXILIARY CONTACTS: Form 2C (DPDT) on DK60-2C and DK60-G2C, Bifurcated contacts rated at 5 amperes at 110 V AC non-inductive.

VSWR: Less than 1.15:1 from 0 to 500 mc (50 ohm load). 72 ohm relays available.

ISOLATION: Greater than 60 db @ 10 mc in DK60 and DK60-2C Greater than 100 db from 0 to 500 mc in DK60-G and DK60-G2C when in the energized position.

OPERATING TIME: Less than 30 milliseconds from application of coil voltage; less than 15 milliseconds between contacts.

Standard Relays with UHF Connectors include:

DK60 ..... $12.45
DK60-G $13.70
DK60-2C $14.35
DK60-G2C $15.65



NEW DK2-60B TRANSFER SWITCH

Designed to meet switching needs when using transceiver as exciter to drive any linear amplifier.

Performs necessary switching to either transmit directly with transceiver or to transmit with transceiver amplifier combination.

Distributors in U.S. and Canada.

SPECIFICATIONS: Freq. range 0 to 500 mc. to 1 kw; VSWR 1.15:1; Isolation 30 db at 500 mc, 50 db at 30 mc; Insertion loss 0.03 db at 30 mc; Available in all std. AC and DC voltages. Connectors: UHF std., type N, BNC, TNC and C available.

DK2-60B with UHF Connectors.... $19.00

DOW-KEY COMPANY
Thief River Falls, Minnesota

For further information, check number 49, on page 110

Space [*from page 60*]

take it over almost all of the earth's surface, its signals can be received and measured relatively simple equipment at modest cost.

In the United States, S-66 receiving sta have been set-up at the University of Illi Pennsylvania State University, Stanford versity, the Central Radio Propagation Lab tory of the National Bureau of Standards NASA's Goddard Space Flight Center. To more than 40 scientists in nearly two d countries have also volunteered to take pa the program, making this the largest coo tive group ever to take part in a NASA s sattelite experiment. (Amateur radio's Pr OSCAR is still the largest cooperative s effort ever undertaken, with more than 1 amateur observers from 30 countries repo observations and measurements of the be signals radiated by the OSCAR I and OS II satellites.)

Although coordinated amateur particip in the S-66 program had not been fully arra at the time this column was being written August), it is a natural for amateurs. Si measurements in the variation of the satel signals may reveal areas of patchiness in ionosphere, while somewhat more sophistic measurements of Doppler shifts and Far rotations can be used for determining the tron density of the ionosphere. The 20.00 signal can be received on most amateur recei and the read-out equipment necessary to mea Doppler shifts and other signal characteristi no more complicated than was required fo serving and tracking the OSCAR beacons. information on Project OSCAR measuren contained in this column for Oct., '61 (p 77-79) can be used as a guide for making si measurements of S-66's signals.[1]

NASA plans to provide orbital inform for S-66 to all participants in the program. C W1AW and the Project OSCAR communic network since plans are underway to have data relayed to radio amateurs through facilities. Volunteer participants can receiv ditional information about the S-66 prog from:

Dr. Erwin Schmerling
S-66 Project
Office of Space Sciences
NASA Headquarters, FOB-6
Washington 25, D.C.

Although not an amateur satellite, S-66 vides the opportunity for radio amateu participate again in a space program of interest to radio communications.

73, George, W3

[1]Walters, Wells, Hillesland, "Project OSCAR Me ments and Tracking", *QST*, July '61, p. 59.
Norgaard, "Eyeball and Eardrum Doppler Trac *QST*, April '62, p. 44. (Feedback, *QST*, June '62, p
Hilton, "Make Your Own Orbital Predictions Doppler Measurements", *QST*, Mar. '62, p. 23.

Area Code 215 CApital 4-1740 Area Code 215 TUrner 7-7350

Top Trades on COLLINS From

W3BAH

BUY AT HAM BUERGER'S

"HAM" BUERGER

Electronic Equipment Distributor

RICES MILL ROAD AT GLENSIDE AVENUE • WYNCOTE, PA., U.S.A.

IN STOCK, THE ENTIRE COLLINS LINE.

	Amateur Net Price
TRANSMITTERS	
30L-1 Linear Amplifier	$ 520.00
30S-1 Linear Amplifier	1556.00
32S-3 Transmitter	750.00
RECEIVERS	
75S-3 Receiver	680.00
75S-3A Receiver	750.00
51J-4 Receiver	1,464.00
51S-1 Receiver	1,828.00
VHF CONVERTER	
62S-1 VHF Converter	395.00
TRANSCEIVERS	
KWM-2 Transceiver	1,150.00
KWM-2A Transceiver	1,250.00
DUMMY LOAD	
DL-1 Dummy Load	58.00
MOUNTS	
351D-2 Mobile Mount (KWM-2)	120.00
CARRYING CASE	
CC-2 Carrying Case	85.00
CC-3 Carrying Case	107.00
POWER SUPPLIES	
MP-1 14 DC Power Supply	198.00
PM-2 Portable Power Supply	150.00
516F-2 AC Power Supply (32S, KWM-2)	115.00
SPEAKERS	
312B-3 Speaker (S/Line)	32.00
312B-4 Speaker Console (S/Line, KWM-2)	195.00
312B-5 PTO Console (KWM-2)	350.00
399C-1 PTO Speaker (KWM-2)	164.00
MICROPHONES	
SM-1 Fixed Station Microphone	32.00
SM-2 Fixed Station Microphone	48.00
MM-1 Mobile Hand Microphone	25.00
MM-2 Mobile Boom Microphone/ Earphone	44.00



Collins 75S-3 Receiver $680

Name your mode—CW, SSB or RTTY—the new Collins 75S-3 will give you the best in reception. The 75S-3 has Collins' famous frequency stability, plus: Q Multiplier, choice of variable or crystal BFO, 200 cycle crystal filter, 2. 1kc Mechanical Filter, and control of AVC. A new spinner knob provides ease of tuning, and AF-RF gain controls are conveniently located on concentric knobs.

MECHANICAL FILTERS	
F455Q-5 Mechanical Filter (758-1).	$ 52.00
F455Y-10 Mechanical Filter (75S1, 75S3)	50.60
F455Y-60 Mechanical Filter (75S1, 75S3)	50.60
NOVICE ADAPTERS	
399B-4 Novice Adapter (32S)	40.00
399B-5 Novice Adapter (KWM-2)	46.00
WATTMETERS	
302C-3 Directional Wattmeter	130.00
PHONE PATCH	
189A-2 Phone Patch	67.00
CABLES	
440E-1 Cable (MP-1 to KWM-2)	17.00
NOISE BLANKERS	
136B-2 Noise Blanker (KWM-2)	124.00

WE GIVE S&H GREEN STAMPS *America's Most Valuable Stamps*

For further information, check number 50, on page 110

EASY TO LEARN CODE

. is easy and pleasant to learn or increase eed the modern way—with an **Instructograph ode Teacher.** Excellent for the beginner or ivanced student. A quick, practical and de-endable method. Available tapes from begin-r's alphabet to typical messages on all sub-cts. Speed range 5 to 40 WPM. Always ready, QRM, beats having someone send to you.

ENDORSED BY THOUSANDS!

he Instructograph Code Teacher literally kes the place of an operator-instructor and ables anyone to learn and master code with-t further assistance. Thousands of success-l operators have "acquired the code" with the **Instructograph System.** Write today for full particulars and convenient rental plans.

INSTRUCTOGRAPH COMPANY

4711 SHERIDAN RD., CHICAGO 40, ILL.
4700 Crenshaw Blvd., Los Angeles 43, Calif.

FREE Catalog

OF THE WORLD'S FINEST ELECTRONIC GOV'T SURPLUS BARGAINS

HUNDREDS OF TOP QUALITY ITEMS — Receivers, Transmitters, Microphones, Transformers, Power Supplies, Inverters, Meters, Phones, Antennas, Test Equipment, Indicators, Filters, Amplifiers, Headsets, Converters, Control Boxes, Motors, Dynamotors, Blowers, Cable, Keyers, Chokes, Handsets, Switches, etc. etc. Send for **FREE CATALOG**—Dept. C.Q.

FAIR RADIO SALES
2133 ELIDA RD. • Box 1105 • LIMA, OHIO

MODEL DI-1
RF
DISTORTION
INDICATOR

- Specifically designed for correct adjustment of linear amplifiers, SSB exciters or transmitting converters.
- Displays RF trapezoid or RF envelope patterns. Uses 3" scope tube with full mu-metal shield. Green filter provides unusually sharp display, even in bright light.
- Trapezoid pattern compares detected envelope of exciter with RF envelope of amplifier or transmitting converter.
- The accessory Two-Tone Plug-In oscillator Model TT-1 provides the signal when making adjustments to the amplifier or transmitting converter.
- No modifications or internal attachments to exciter or amplifier required. Rear connections provided for 50-70 ohm coax lines.
- Operates 160 thru 6 meters. NO TUNING required. Handles any power 5 watts to 2 KW PLUS.
- Built-in, hum free power supply for 117 VAC.
- Comes completely wired and tested, with all tubes and ready to operate.

Amateur Net Price.....MODEL DI-1.....$99.95
MODEL TT-1.....$19.95

P&H ELECTRONICS INC.
424 Columbia Lafayette, Ind.

For further information, check number 51, on page 110



DOW-KEY CONNECTORS

PANEL MOUNT
Durable, silver plated, precision made. Only 5/8" hole is needed, no screws.
ea. 70

DOUBLE MALE
Favorite everywhere. Precision made, rugged locking type. Silver plated.
ea. 95



DOW-KEY COMPANY, Thief River Falls, Minn.

"HOW TO MAKE MONEY IN Mobile Radio Maintenance"

AUTHORITATIVE GUIDEBOOK
ABOUT THE BOOM IN TWO-WAY MOBILE-RADIO. GIVES FACTS, FIGURES, PAY RATES. WRITE TODAY!
FREE

LAMPKIN LABORATORIES, INC. Electronic Div. BRADENTON, FLA.

USA-CA [*from page 62*]

their way to that many DXers (names provid by K6BX).

Members of the USA-CA Good Will Club whom any DXer may feel free to write seeki U.S. county identity are:

K1BUR, KSG, LDK, MEM, OOF, PMJ, QCJ, THG, U UAB; W1DMD, EIO, GKJ, LFX, YPH; K2GTF, PFC, T UFT, VGR, ZKU; W2EMU, ETS, JMF, JQU, KAT; WA2DF EFN, KQG, LKW, NFN, ONO, TCW, WLN; K3CNN, D HNP, HZY, JGJ, MNW, NAS, PQO; W3NCF, OUA; K4CI DWU, JIG, LWL, MPE, NUW, OAF, VRI, ZRA; WA4A AYX, BMC, CMV, IEW; W4EJP, FNQ, UF, VWW, W WMQ; K5AXK, BQS, BTM, HHO, JBC, MEH, SBN, S USE, UTH, UYF, VXP, WNL; WA5AJK; W5AWT, B EHY, NXF, KPO, VSQ, VZU; K6JBP; W6DIX, MDK, O YC; WA6AJF, ATY, DWH, ECF, FCR, MWG, OZL, PDE, F K7CHA, IMP, JRE, LDK, LTV, LUH, MRX, NHV, OXB, S W7KOI, NNF, RZY; K8BBH, IQB, ITH, IUZ, MMO, T W8CSK, KPL, WUT; WA8AWH; WN8DOF; K9DW EGQ, HXX, QGR, TZH, YND, ZQW, ZXG; W9BPG, CLH, G IRH, QQG, QWM, UX; WA9AYD; KØBQI, DEQ, HEU, F RGU, ITO, PLN, VBQ; WAØAQN, ARO, CR6CA, DL1C G2FFO, G5GH, G8PL, F9BB, F9MS, OK3E VE3EUH, VE6AJC, VP9AK, ZL1TB, and s.w.l Andy Rugg, 16 Lake Breeze, Point Claire, Que., Cana Norman Atrip, 406 W. Broad St., Smithville, Ten Steve Cline, Tazewell, Va.; Terry Drott, P.O. Box 1 Smithville, Tenn.; Richard Polson, 4671 No. Orcha Fresno 26, Calif.; Cliff Hoobler, 8134 Baird Ave., Resi Calif.; Richard Hadon, Bellville, Wisc.; Lavoyd Kun 7618 Beaverland, Detroit 39, Mich.; Gary Perlste YMCA, 10th Forson St., St. Joseph, Mo.; Robert V steenburgh, Rte 1, Chase, Kansas; Bob Savoy, 7 Hasbrook St., Phila. 4, Pa.; Dick Little, 4140 Winfi Ave., Ft. Worth, Texas; Pete Wood, 5620 S.W. 18 Ave., Aloha, Ore.; Roger Williams, Rte 2, Box 78 Snohomish, Wash.; WPE4CT, 405 North Main St., L caster, S.C.; Rob Sanden, RR1, Ogden, Iowa.

Old Dominion Award

The Roanoke Valley Amateur Radio Cl sponsor The Old Dominion Award for conta ing Virginia counties with requirements bas on your QTH. Offered in three classes:

Class	E. of Miss. River (VE1, 2 & 3) *(Counties)*	W. of Miss. River (VE4, 5, 6, 7 & 8) *(Counties)*	DX (KH6, KI & /MM *(Counties*
1	96	96	96
2	75	60	50
3	50	35	25

Class three is basic award to which seals added for classes two and one. Independent cit may count for any *one* county sharing comm borders. Send alphabetical certified list, full l data and 50¢ or 5 IRC to Custodian, K4WV 1902 Bridle Lane, S.W., Roanoke, Va. Endor ments made for all one band or mode or mix

QCWA QSO Party Results

Here are highlights of results of QCWA's 19 annual QSO Party: 182 logs received represen all U.S. Districts, HC1, F7, VE3, KL7 and KI We will list only the top 25 contestants: Fi figure shows QCWA member contacts and s ond figure shows contacts with non-members QCWA: 1. W4FNQ 196/256; 2. HC1DC 17 314; 3. W6ZPX 147/167; 4. W5UX 128/1 5. W6NWI 115/168; 5. *(tie for 5th place)* W5I 115/144; 7. K6GIL 114/132; 8. W5DWO 11 136; 9 W1DIT 109/36; 10. W2ZM 108/1 11. W3AHX 105/125; 11. *(tie for 11th pla* W7AYO 105/112; 13. W7LQ 86/92; 14. W OQV 80/100; 14. *(tie for 14th place)* W1G

This is the NUVISTAPLUG

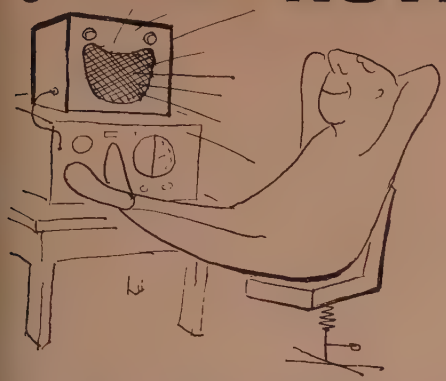

NOW YOU HEAR IT!

The NUVISTAPLUG is a highly effective nuvistor amplifier designed as an exact replacement for the present rf amplifier tube in most communications receivers.

The NUVISTAPLUG will replace 7 pin miniature pentodes only. It will operate in almost 80% of all receivers using a 7 pin miniature pentode as the rf amplifier, reducing the noise level quite noticeably, and thus making weak signals pop out above the noise level.

NOW YOU DON'T!

The NUVISTAPLUG is sold on a money-back guarantee in the event that it doesn't improve your particular receiver. More than 2,000 Nuvistaplugs are currently in operation, and the manufacturing facilities have been stepped up heavily.

NUVISTAPLUGS are now available in large quantity for immediate delivery. Be certain to specify exactly which model is desired. Don't delay! Your receiver most likely will be greatly improved by adding a NUVISTAPLUG. You'll never know unless you try it.

ONLY $19.95

N.Y. C. Residents add 4% City Sales Tax
postpaid (No C.O.D.'s)

A review of The NUVISTAPLUG appeared in the Sept. 1962 issue of CQ on page 26.

RAYTRONICS
c/o CQ Magazine
300 West 43rd Street
New York 36, New York

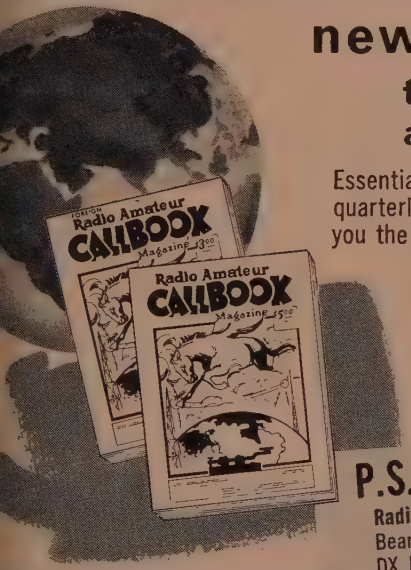

new issue just out!

the radio amateur CALLBOOK

Essential QTH information for all radio amateurs and SWL's. Each quarterly issue of the CALLBOOK is completely revised to bring you the most up-to-date information on QTH's.

PLUS THESE EXTRA FEATURES!

- Great Circle Bearings
- Great Circle Charts
- Prefixes by Countries
- International "Q" Signals
- World Time Chart
- International Postal Information
- And many other features

OOK of United States Listings
Over 250,000 K & W calls)
quarterly issue..... **$5.00**

OOK of Foreign Listings (Over
00,000 calls outside the U.S.A.)
quarterly issue..... **$3.00**

P.S. ORDER THESE VALUABLE RADIO AMATEUR GUIDES, TOO!

Radio Amateur DX Guide—62 pages of vital data; 291 Great Circle Bearings for 22 major U.S. cities; Prefix Map, Time Conversion Table, DX Log, plus other features..... **$2.00**

World Prefix Map—Full color, 29" x 42", shows prefixes on each country . . . DX zones, time zones, cities, cross referenced tables **$1.00**

World Atlas—Only Atlas compiled for amateurs. Polar projection, six continents, prefixes on each country . . . full color, 16 pages..... **$1.00**

Write for free, illustrated brochure!

RADIO AMATEUR CALLBOOK
Dept. C, 4844 W. Fullerton Ave., Chicago 39, Ill.

See your favorite dealer today for your latest issue or order direct from the publisher (add 25c for mailing).

OCTOBER SPECIALS

4X150A-sockets 2 on chasis	$ 2.50		
4CX300A-Sk700 sockets	7.50		
8 pin octal sockets	.3 for .25		
7 pin min. sockets	.3 for .25		
416B—W.E.	$ 8.95	813	$12.50
404A—W.E.	2.75	4CX1000A	100.00
417A -W.E.	4.95	6155/4-125A	17.50
100TH	10.95	4X250B/ceramic	$22.50
250TH	17.50	304TL	27.50
3ACP2	9.95	3ABP2	22.50
2C39A	6.95	3CX100A5	8.95
6161	27.50	5675	7.50
5376	8.95	6142	17.50
833A	32.50		

KLYSTRONS—Va-6315 @ $150., BL-6310— @ $137.50, Ray. QK436—@ $75.00 707B—@ $7.50, 2K25—@ $5.00.
Traveling Wave Tubes—EM778 **Eimac—$250.00.** M2204AF—**Microwave** Elect. @ $125.00 Ha-9-B Huggins—@ $125.00. Magnetrons—5J29—@ $7.50.

Also many other tube types not listed. Get our price before purchasing any tubes you may need.

tub.-cond-2 sec. 3000 MFD-25VDC, 1500MFD-25VDC.—4" x 1¼ 35¢ ea. ..... 3 for $1.00
tub.-cond-2 sec. 1000 MFD 25VDC, 200MFD-25VDC.—3" x 1¼ 35¢ ea. ..... 3 for $1.00
antenna insulators—3" x 1" 10¢ ea. ..... 12 for $1.00
Sark.—M500—Silicon rect.—50¢ each ..... 5 for $2.00

We buy tubes, parts, components, test equipment

Mid-West Electronic Supply
54 Mia Avenue Dayton 27, Ohio

MAKES SENDING A PLEASURE
With **VIBROPLEX**

No special skill required. Just press the lever — Vibroplex DOES THE REST All parts precision machined and key is adjustable to any speed. Will not tire the arm. Five models, priced at $17.95 to $33.95.

VIBRO-KEYER

In building electronic transmitting units, Vibro - Keyer supplies the perfect part. With a finely polished base 3½" by 4½" and a weight of 2¾ lbs. Has same contacts and finely finished Vibroplex parts. Standard, at $17.95 DeLuxe, with Chrome Plated Base, priced at $22.45.

Order today at your dealers or direct.
THE VIBROPLEX CO., INC.
833 Broadway New York 3. N. Y.
FREE Folder

ALL BAND TRAP ANTENNA !



Reduces interference and Noise on All Makes Short Wave Receivers. Makes World Wide Reception Stronger. Clearer on All Bands!

For ALL Amateur Transmitters. Guaranteed for 500 Watts Power for Pi-Net or Link Direct Feed. Light, Neat, Weatherproof.

Complete as shown total length 102 ft. with 87 ft. of 72-ohm balanced feedline, Hi-impact molded resonant traps. (Wt. 3 oz. 1" x 5" long). **You just tune to desired band** for beamlike results. Excellent for ALL world-wide short-wave receivers and amateur transmitters. For NOVICE AND ALL CLASS AMATEURS! NO EXTRA TUNERS OR GADGETS NEEDED! Eliminates 5 separate antennas with excellent performance guaranteed. **Use as Inverted V for all band power gain. NO HAYWIRE HOUSE APPEARANCE! EASY INSTALLATION!** Complete Instructions.

80-40-20-15-10 meter bands. Complete $14.95
40-20-15-10 meter bands. 54-ft. ant. (best for swl's) 13.95
20-15-10 meter bands. 24-ft. antenna 12.95

SEND ONLY $3.00 (cash, ck., mo) and pay postman balance COD plus postage on arrival or send full price for postpaid delivery.
Free technical information
WESTERN RADIO • Dept. AC-10 • Kearney, Nebraska

80/95; 16. W8KSR 77/94; 16. *(tie for 16th pla* W6YC 77/90; 18. W6JWD 73/93; 19. W8NX 68/79; 20. W9VZP 66/86; 20. *(tie for 2* *place)* KL7MF 66/74; 22. W6GW 64/70; W7POU 61/64; 24. W6FZX 59/63; 25 WØCT 57/61;

It is understood the Los Angeles Area QCW Chapter will sponsor the 1964 QCWA Party a that this live-wire organization will seek m participation for the next event.

QCWA, now with over 3,550 members a growing steadily; has its standing awards p gram for working members in designated nu bers in stated numbers of states and countr For full information about QCWA Awards Ru and membership list corrected quarterly, se s.a.s.e. to K6BX.

See you in November when the Christn commercial rush starts even before you ha time to say your Thanksgiving.

Old Man, K6

Millen 90800 [*from page 42*]

does much to eliminate feedback.

If desired, the oscillator circuit and the amp fier screen may be fed with +250 volts and amplifier plate with +500 volts from a dual v age power supply like that shown in fig. 2. T was done in the photographed unit to elimin the bank of bleeder resistors. There is no cha in operation.

This modification was performed while in employ of Sprague Electric Company of No Adams, Mass. Their permission to publish t article is gratefully acknowledged.

Ham Clinic [*from page 82*]

thousands of questions we have on file. We quest that if you want a rapid reply to y questions that you send your airmail letter us at 4 Lutzelmatt Strasse, Luzern, Switzerla Enclose two International Reply Coupons (airmail return) or the equivalent (in stamps coin) of 30¢. If you can wait for a reply, di your letters to me in care of *CQ*. Your coop ation will be appreciated. Next month, column will be *all* questions.

Thirty

Those of you writing to us complaining t the *Q*-multiplier described on page 60 of April *CQ* and the diode checker on page 58 the July issue will not work, bear with us! corrections were not caught in time for pu cation and were misplaced for subsequent is publication. On the *Q*-multiplier, reading diagram from left to right, the first capac should be .001 mf, the 100 should be in m the one below it should be .002 mf and the treme right capacitor should be 1-3 mmf. In diode checker, the bottom end of the pot sho go to ground; and the anode of the diode sho go to the horizontal input of the scope. *cathode* of the diode should go to ground.

Again, thank you for reading HAM CLINIC enjoy bringing it to you. 73 and 75 Ch

den Jubilee [*from page 44*]

rtise! An urbane and humorous speaker, he red to the earliest experiments in radio, h were described in the *Times* of the day as philosophical curiosity." He spoke of the ndid work put into research by radio ama- and of their invaluable contribution to the ce of communication . . . ". . . and what a l thing it would be," said my lord, "to have national control of the world by people like who are decent and solid citizens."

response to the toast "The Guests," pro- d by G6CL, John Clarricoats, General Sec- y of RSGB, presentations were made to the ety by PAØDD, W. Dalmijn, President of RON, and VE3CJ, Noel Eaton, Canadian ctor of ARRL and the Leagues official rep- ntative at the Jubilee. Gifts were also pre- ed by Swiss, German and Norwegian esentatives.

reetings were read, a veritable DXCC, from British Commonwealth, from Germany, nce, Belgium, Eire, from Finland and Greece, ernal greetings from the USSR, from South ca and Sweden; then from organizations like licrafters, which spoke of the part amateur o plays in the effort to achieve peace on h and goodwill to all men, from the Editor *CQ*, offering congratulations and wishes for tinuing success in the future, from Herbert ver Jr., W6ZH and President of IARU—so wondrous procession of honors and citations lled with affection, with dignity and with ect.

f course there was nostalgia—but they were fled to nostalgia. There was continual refer- e to those who had been with us fifty years but who were not with us to celebrate this estone. Maybe ghosts walked, but they were mphant, happy ghosts, just breaking in for a l QSO, ghosts who had given to the world bby so fine and a science so boundless.

he British are reputed to be over-concerned h their old traditions, with what has gone by. the atmosphere in London this first week of , 1963, was one of challenge, as well as of achievement, of a serene looking-back, with jubilation, yet of a confident and lively king-forward, to carry the fine tradition of the all right on into the Space Age. ■

[*from page 68*]

Lafayette adds there was much interest in the with a gallery of 20 or more spectators at t times observing and listening to where r relatives or friends were flying. Contestant's Ns were posted and anything special was an- nced over the p.a. system at the airport. Gear sisted of a KWM-2 and 30L-1 linear lent by lins Radio and a Gonset courtesy of Scott io.

he AWTAR terminated at Atlantic City, N.J. July 17. W3GTC, Carolyn, was over-all radio chairman for the sixth consecutive year.

The NEW TYMETER©

"Time at a Glance"

24 HOUR CLOCK

#300-24H MODERNE

$15 Plus Applicable Taxes

Ebony or grey plastic case. H3¾", W5⅝", D3¼". Wt. 3 lbs. Self starting electric. 110V 60cy. A.C. Guaranteed 1 Year. UL approved motor and cord.

At Your Dealer, or WRITE TO

TYMETER ELECTRONICS
PENNWOOD NUMECHRON CO.
7249 FRANKSTOWN AVE., PITTSBURGH 8, PA.



Here is Crank-Up Tower convenience at the flick of a finger!

"Moto-Winch" by E-Z WAY

When ordered with Tower.

$279.50 Am. Net.

When ordered as kit, $309.50 Am. Net

- Pull-down & Crank-up action
- Double worm gear drive
- Push button control

Write for details

E-Z WAY TOWERS, Inc.
P.O. BOX 5767 TAMPA 5, FLORIDA

Reserve your copy of the

NOVEMBER ANNUAL ISSUE NOW!

$1 at the newsstand, subscribers will receive their copies at no extra cost.

NEW
Los Angeles Plant
Now Filling
West Coast Orders

Citizen Band Class "D" Crystals

CITIZEN BAND CLASS "D" CRYSTALS

3rd overtone — .005% tolerance — to meet all FCC requirements. Hermetically sealed HC6/U holders. ½" pin spacing. .050 pins. (Add 15¢ per crystal for .093 pins).

$2.95 EACH

All 23 megacycle frequencies in stock: 26.965, 26.975, 26.985, 27.005, 27.015, 27.025, 27.035, 27.055, 27.065, 27.075, 27.085, 27.105, 27.115, 27.125, 27.135, 27.155, 27.165, 27.175, 27.185, 27.205, 27.215, 27.225, 27.255.

Matched crystal sets for ALL CB units (Specify equipment make and model numbers) ..... **$5.90 per set**

CRYSTALS IN HC6/U HOLDERS

SEALED OVERTONE — .486 pin spacing — .050 diameter — .005% tolerance
15 to 30 MC ..... $3.85 ea.
30 to 40 MC ..... $4.10 ea.
40 to 60 MC ..... $4.50 ea.

FUNDAMENTAL FREQ. SEALED — From 1400 KC to 2000 KC .005% tolerance ..... **$5.00 ea.**
From 2000 KC to 10,000 KC, any frequency, .005% tolerance ..... **$3.50 ea.**

RADIO CONTROL — Specify frequency. .05 pins spaced ½" (Add 15c for .093 pins). ..... **$2.95 ea.**



QUARTZ CRYSTALS FOR EVERY SERVICE

All crystals made from Grade "A" imported quartz—ground and etched to exact frequencies. Unconditionally guaranteed! Supplied in:

FT-243 holders — Pin spacing ½" — Pin diameter .093
MC-7 holders — Pin spacing ¾" — Pin diameter .125
CRIA/AR holders — Pin spacing ½" — Pin diameter .125
FT-171 holders — Pin spacing ¾" — Banana pins

MADE TO ORDER CRYSTALS . . . Specify holder wanted
1001 KC to 1600 KC: .005% tolerance ..... $4.50 ea.
1601 KC to 2600 KC: .005% tolerance ..... $3.00 ea.
2601 KC to 8650 KC: .005% tolerance ..... $3.00 ea.
8651 KC to 11,000 KC: .005% tolerance ..... $3.75 ea.

Amateur, Novice, Technician Band Crystals

.01% Tolerance . . . **$1.50 ea.** — 80 meters (3701-3749 KC) 40 meters (7152-7198 KC), 15 meters (7034-7082 KC), 6 meters (8335-8650 KC) within 1 KC
FT-241 Lattice Crystals in all frequencies from 370 KC to 540 KC (oll except 455 KC and 500 KC) ..... **50c ea.**
Pin spacing ½" Pin diameter .093
Matched pairs — 15 cycles **$2.50** per pair
200 KC Crystals, **$2.00 ea.**; 455 KC Crystals, **$1.25 ea.**; 500 KC Crystals, **$1.25 ea.**; 100 KC Frequency Standard Crystals in HC6/U holders **$4.50 ea.**; Socket for FT-243 Crystal **15c ea.**; Dual Socket for FT-243 Crystals, **15c ea.**; Sockets for MC-7 and FT-171 Crystals **25c ea.**; Ceramic Socket for HC6/U Crystals **20c ea.**

IF YOUR PARTS DEALER DOESN'T STOCK Texas Crystals, order direct and send us his name.

TERMS: All items subject to prior sale and change of price without notice. All crystal orders must be accompanied by check, money order or cash with payment in full.

TWO PLANTS TO SERVE YOU
RUSH YOUR ORDER NOW TO

TEXAS CRYSTALS

Dept. CQ-10 — Div. of Whitehall Electronics Corp.
1000 Crystal Drive, Fort Myers, Florida. Area 813 Phone WE 6-2109
4117 W. Jefferson Blvd., Los Angeles, Calif., Area 213 Phone 731-2258

FOR SHIPMENT VIA FIRST CLASS MAIL AT NO EXTRA COST ATTACH THIS ADVT. TO YOUR ORDER!

For further information, check number 53, on page 110

24th YLRL Anniversary Party

Time: CW—Start—October 23, 1963, 1200 GMT (1700 GMT)
End—October 24, 1963, 1800 GMT (2300 GMT)
Phone—Start—November 6, 1963, 1200 GMT (1700 GMT)
End—November 7, 1963, 1800 GMT (2300 GMT)

Eligibility: All licensed YL and XYL operato throughout the world are invited to participa *YLRL members only* are eligible for the c awards; non-members will receive certificat *Only YLRL members* are eligible for the Corcor Award. Contacts with OMs will not count.

Operation: All bands may be used. Cross-band o eration is not permitted. Only one contact wi each station will be counted in each contest.

Procedure: Call "CQYL"

Exchange: Station worked, QSO number, RS RST, ARRL Section or country. Entries in I should also show the time, band, date, transmitt and power. (Please know your own ARRL Sectio ARRL Section list available for SASE to K1IZ

Scoring: a) C.w. and phone sections will be scor as separate contest. Submit *separate logs* for ea contest.
b) Multiply number of contacts by total numb of ARRL Sections and countries worked.
c) AM contestants running 150 watts input or l at all times may multiply the results of (b) 1.25 (low-power multiplier).
d) SSB contestants running 300 watts P.E.P. less at all times may multiply the results of (b) 1.25 (low-power multiplier).

Awards: Highest c.w. score—gold cup (YLRL me ber). Highest phone score—gold cup (YLRL me ber). Highest phone log and c.w. log in ea *district* and country will receive a certifica Highest *combined* phone and c.w. score, YL member only, will receive Corcoran Award.

Logs: Copies of all logs must show claimed score, *signed* by the *operator* and postmarked no la than Nov. 23, 1963 and received no later th Dec. 6, 1963, or they will be disqualified. Se only a copy of your log—no logs will be returne Send copies of logs to Blanche Randles, K1IZ 62 Linda Ave., Framingham, Mass.

Here and There

Correction in YL-OM Contest scores liste July *CQ*: Top district score on c.w. among OMs in the first district was W1HOZ (inst of W1HOX). Sorry, Dave.

K4's RHL and RNS report a new YL clu Fort Meyers, Fla., which has chosen the n of "Kilo-ettes." Current officers are: P WA4JVH, Donna; V.P., WN4IUU, Pat; secy, Alice Justham; corres. secy, K4NXZ, J treas., Mary Lou Propp.

Another new YL net/club started out as Northwest YL Net, and now has chosen name "Minow Net" (for the first letters of st in 7th call area). Officers are: Pres., K7RA Bobbie; V.P./historian, K7KSF, Phyl; s K7RBE, Velda; P/C, K7PVG, Frieda. They one official meeting a year during a picni May, and are working on a certificate. The meets Fridays on 3830, in summer at 1600 and in winter at 1700 GMT. All YLs are inv to check in.

33, W5

Ham Shop

tes for the Ham Shop of 5¢ per word for advertising
h in our opinion, is non-commercial in nature. A charge
5¢ per word is made to all commercial advertisers or
nizations. Since we do not bill for Ham Shop advertising,
remittance must accompany all orders.
osing date is the 15th of the 2nd month preceding date
ublication. Your copy should be typewritten, double
ed on one side of the page only.
cause the advertisers and equipment contained in
Shop have not been investigated, the publishers of CQ
ot vouch for the merchandise listed therein. We reserve
right to reject advertising which we feel is not of an
eur radio nature.

CB's? WPE's? Largest variety, samples 20¢ (refunded). ks: (fall) American $5, Foreign $3. Sackers, W8DED, l, Michigan.

SWL's or what have you. You name it and we will do it as you wish. Expert art work at nominal cost, enough R. McGee, 6258-103rd St., Jacksonville, Fla. 32210.

SWL's CB Samples 10¢. Nicholas & Son Printery, P.O. Box Phoenix 17, Arizona.

new designs. Free catalogue. Longbrook, Box 393-Q, town, New Jersey.

QSL-size calendars, 100—$7.00. Samples 25¢ Morgan, , 443 Euclid, Akron, Ohio.

E of yourself, home, equipment, etc., on QSL cards, made your photograph. 250—$7.50 or 500—$10.00 postpaid. s free. Write to Picture Cards, 129 Copeland, LaCrosse,

SWLs XYL-OMs (Sample assortment approximately 9¾¢) g designing, planning, printing, arranging, mailing, eye- g comic, sedate, fantabulous. DX-attracting. Protopay, unparagoned cards. (Wow!) Rogers, KØAAB, 961 Arcade . Paul 6, Minn.

Free samples. Fast service. Boiles, 7701 Tisdale, Austin,

ION Want to design a QSL card? Sampler Instruction Kit ow! what cards you can create. $1.50 and up 100. Samco, 3, Wyantskill, N. Y. 12198.

-100—$2.50. Samples. Dime. AMEE's Printery—W9FXQ— 8, Oak Lawn, Illinois.

INT QSLs—SWLs 100 2-color glossy $3 postpaid. QSO file $1 per 100. Rusprint Box, 7507 Kansas City 16, Mo.

3-color glossy. 100 $4.50. Rutgers Vari-typing Service. amples, Thomas Street, Riegel Ridge, Milford, N. J.

CARDS Badges, decals, goodies, illustrated literature with s 25¢. Errol Engraving Att: K1VRO, Westfield, Mass.

SL's . . . Dime . . .Filmcrafters. Martins Ferry, Ohio.

URPLUS direct from U.S. Government. Transmitters, re- , teletype, microwave, test equipment, misc. Where and buy. Depot directory & Procedures—$1.00—Ramco, Box o. Hollywood, Calif.

VIRED write Lindy Smith, Rt. 1, 29th Street, Haines City, .

RT inexpensive BC-659 to CB with avc, crystal filter, h bias, Pi coupling. Conversion kit $20.60 F.O.B. Citrus s.—plans only, $2.00. Jay's CB Service, P.O. Box 173, Heights, California.

Gonset G-66B, 3 way supply, complete with all band center Master Mobile Whip $140, Viking Ranger, old but mint, difications $140. All manuals with gear. K1IGF, 83 Lovers Niantic, Conn. PE 9-2222.

LE B&W 5100 xmitter, w&w 51SB sideband generator, and receiver. Make an offer. David Sheats, 4755 Arapahoe, r, Colo.

IG Entire station of the late K2ADE for the lump sum of 0. Consisting of factory wired Valiant, SX-101A, three t Mosley beam, phone patch Zmatch, etc. Must pick up. Cohen, Box 692, Liberty, N.Y. Phone 2716.

ENGINE driven ac/dc generators, burn wood, coal, etc., atts. Kits $34.50 up; catalog $1.00 refundable, Richcraft ering, Sterling, Virginia.

S KWS-1 #959. Looks new, guaranteed perfect. Includes a relay, instruction manuals, spare tubes. Will ship. Best bove $725 or trade for KWM-2. Will accept NCX-3, SR-150 t payment. Al Weiss, W6UGA, 2370 Knob Hill, Riverside, nia, OV 3-3149.

BODY Buy! Sell! Swap! Transmitters, receivers, components —wanted—in "Equipment Exchange." Interesting sample Write: Brand, Publisher, Sycamore, Illinois.

BARRY ELECTRONICS

National NCX-3 Tri-Band SSB transceiver with NCX-A Power Supply 115 VAC @ 60CPS $379.00
Collins 75S3A
Collins KWM-1 with Collins AC P. S. **Write for Price**
Hammarlund SP-600 JX-17 ..... $475.00
WRITE FOR FURTHER INFORMATION ON SP-600' MODELS
Gonset G-43 All Band Receiver. (REG. $159.50) (like new) SPECIAL $89.50
Drake 2B Receiver $279.95
Drake 2-BS Speaker $16.95
Model 2-BQ Q-Multiplier & Speaker $39.95
Hammarlund HX-50 with ZBZ $483.90
Hammarlund HQ-110AC $259.00
Hammarlund HQ-170AC $379.00
Hammarlund HK-1B Electronic Keyer $39.95
Hammarlund HQ-180AC $449.00
Hammarlund HXL-1 Linear Amp. (late Oct. Delivery) $395.00
Collins AM-1526/URC . . . ARC 58 I.F. Strip $49.00
Central Electronics GC-1 Gated Comp. Amp. $39.00
National RDZ-1 (220 to 400 Mcs Receiver) 115 VAC @ 60 CPS $50.00
Johnson Type "L" Butterfly Capacitor. 4.3 to 26 Mmfd per section ..... $.95
Johnson Type "L" Miniature Capacitor 3.5 to 27 Mmfd ..... $.75
General Radio 50-B Variac. Input: 230 VAC (7 KVA) @ 60 CPS; Output: Variable from 0-270. VAC: used $80.00
Plate Transformer: Pri: 220 @ 50/60 CPS with 4 taps. Sec: 2550-0-2550 @ 550 Ma. Test: 11.5 KV. $75.00
Johnson 25 Watt Bayonet Socket for 866, 3B28, etc. $.65
Hammarlund 320-320Mmf. Dual Xmtg Capacitor. Fully-meshed spacing: .08" $4.25
Sprague Oil Capacitor. 1 Mfd @ 2,000 VDC $1.00
LARGEST DIVERSIFIED TUBE STOCK IN THE USA! . . . .
Here are some types. Write or call on other needs.

4-65A	@ $10.00	3B28	@ $ 2.50	4CX1000A	
4E27	@ $ 8.75	812A	@ $ 3.75		@ $120.00
811A	@ $ 3.75	830B	@ $ 1.00	5842/417A	
816	@ $ 2.50	872A	@ $ 4.75		@ $ 5.90
866A	@ $ 1.65	5514	@ $ 6.95	5847/404A	
1616	@ $ 1.00	6360	@ $ 3.90		@ $ 3.90
6146	@ $ 3.25	4CX300A		6383 (RCA)	
4-1000A	@ $95.00		@ $42.00	5894	@ $ 25.00 @ $ 18.90

Sale—Porcelain Insulator: 4½" L. ½" Diam. Center-to-center dimensions of holes: 3". **Ten** for **$1.00, 100** for $8.00

CUSH CRAFT BLITZ BUGS:		CLEGG SALE	
Type LAC-1	@ $3.95	Clegg 99'er:	$135.00
Type LAC-2	@ $4.45	Clegg Zeus	$595.00
Type LAC-2N	@ $5.95	Clegg Interceptor	$389.00

Johnson Viking II Ranger—Factory Wired. 6 thru 160 Meters. 75 Watts CW/65 Watts AM $359.50
24 Volts Center-Tapped @ 50 A. Transformer: Pri: 115 VAC @ 60 CPS. 28 lbs. $27.00

38 Tube Aircraft Electronic Gun Control, F.O.B. Ga. **$11.95,** or postpaid in 48 of the states **$14.95**
For complete list of tubes and details see *Barry's* Ad on page 106 of the July CQ.

RME 6900 Rcvr. **$369.00,** and RME 6901 Spkr.... $19.50
Closed Circuit V.V. Cameras: Grundig, type Fernauge FA 40 gigh difinition. W/115 VAC 60 cycle power supply, Excel. cond. lab checked. Comes with one lens, photo-stat of book $595.00
Tripod for above, only $35.00
RCA 6198 Vidicon $100.00
Sylvania Closed Circuit TV Camera: W/blt-in 115 VAC 60 Cy. Power Supply. Excel. cond. lab checked. no book. $495.00
COME IN AND BROWSE, Mon. to Fri. **9** to **6.** Saturdays **10 A.M. to 2 P.M.** (Free parking on street Sats.) Mon. to Fri. park at Garage at 501 Broadway.
We buy and sell and swap as well. Let's hear from you!

FOR #11 Midsummer/Fall "Greensheet" Catalog write to:
Barry Electronics Dept. C-10
512 Broadway New York 12, N. Y.
Area code 212 WAlker 5-7000

☐ Enclosed is money order or check and my order. Prices FOB NYC. Shipments over 20 lbs. will be shipped collect for shipping charges. Less than 20 lbs. Include sufficient postage. Any overage will be refunded. Fragile tubes shipped via Railway Express.
☐ Send copy of new 1963 "Green Sheet" Catalog #11
☐ Send information on: .....
☐ I have available for trade-in the following: .....
.....
Name ..... Title
Company .....
Address .....
City ..... State .....

For further information, check number 54, on page 110

Here is E-Z WAY QUALITY for only $99.50



- Supports a Quad or any small beam having a wind area of 4.0 sq. ft. or less at 40 ft. in 60 MPH winds. NO GUYS!
- Cranks up or down for easy access to beam and rotor
- Diagonal Bracing combats twist and torque
- Electric Arc Welded
- Dip Painted, tower is completely covered with rust resistant aluminum enamel

Model HD-40 Painted ...	$ 99.50
Model BAHD-40 Painted (Building Attach)	106.25
Model GPKHD-40 Painted (Ground Post Tilt)	149.50
Model HD-40 Galv.	134.50
Model BAHD-40 Galv. .. (Building Attach)	141.25
Model GPKHD-40 Galv.. (Ground Post Tilt)	184.50

FREIGHT PREPAID ANYWHERE 48 U.S.A.

E-Z WAY TOWERS, Inc.

P.O. BOX 5767 TAMPA 5, FLORIDA

For further information, check number 55, on page 110

JUST **$5** DOWN and $9.95 A MONTH

delivers a brand new

DRAKE 2 B RECEIVER

Here's all you pay after $5 down payment

	Amateur Net Price	Monthly Payments 1 year	2 years	3 years
2B Receiver	$279.95	$25.20	$13.74	$9.92
2AC Calibrator	16.95	1.62	.81	.54
2BS Speaker	16.95	1.62	.81	.54
2BQ Combo	39.95	3.53	1.76	1.26
Available Soon				
TR-3 Transceiver	495.00	44.91	24.50	17.69
RV-3 V F O	99.95	9.15	4.99	3.60
M-S 3 Speaker	19.95	2.28	1.14	.76
AC-3 Supply	79.95	7.32	3.99	2.88
DC-3 Supply	129.95	11.90	6.49	4.69

AMATEUR ELECTRONIC SUPPLY — Dept. C
3832 West Lisbon Ave., Milwaukee 8, Wis.

Terry: Rush me a Drake.....I enclose $5 deposit and I will pay balance ☐ COD ☐ 1 Year ☐ 2 Years ☐ 3 years.

I have to trade.....

I want a.....What's your deal?.....

Name .....

Address.....

City.....Zone.....State.....

For further information, check number 56, on page 110

SELL SX-101A—$260; HC-10 ssb converter—$75; kw L 1000F Eldico—$350; Transtenna T-R switch, outboa $50. all like new. Lamb, 1219 Yardley Rd., Morrisvi

WANTED old radios manufactured before 1925, especi Murad, Paragon and Zenith. J. Worcester, R.D. 1, Fra

HIGHLY-EFFECTIVE home study review for FCC Comme Exams. Free literature! Wallace Cook, Box 10634, Mississippi.

ELECTRONICS, radar, unusual surplus bargains, free fl 923 W. Schiller, Phila. 40, Pa.

WIND DRIVEN ac/dc generator system, kits, $19.00 $1.00 refundaable; Richcraft Engineering, Sterling, V

FOR SALE immaculate HT-37 with Shure controlled desk microphone, grip to talk switch $235; HQ-170 hour clock $230. Both in factory cartons. Scarcely use work like brand new. Johnson 250-39 TR switch $12.5 chrome plated bug $1.50. Jensen studio-type reflex with GE wide range speaker $20. K5YJR, 9627 Shad Dallas, Texas 75218.

COMPLETE station Drake 2A—$220, Central 20A—$169 Heath Q-multiplier—$9, crystal calibrator—$7, crysta console with many built-ins. Make offer for whole Dlugatch, WA6NSF, 3954 Ursula, Los Angeles 8, AXminster 2-5187.

W1REP selling HT-32A plus SX-111 $500 takes bot original cartons have seen very little use and in lik dition. Prefer local deal.

TELEVISION camera start your closed circuit system station with basic transistor unit. Write Video System Peachtree N.W., Atlanta 8, Georgia.

WANTED commercial, military, all types, ARC, ARN, PRC, URR, URM, TS, 618S, 171, 51R, 51X, APN, others P.O. Box 156, Annandale, Va.

A-1 reconditioned equipment. On approval. Trades. T crafters S-85, $79.00; SX-99 $89.00; SX-110, $119.0 $149.00; HQ-170, $229.00; Collins 75S-1, 75A-4; 32S- Gonset, Elmac, Heath, Johnson, RME and many other for lists. Henry Radio Company, Butler, Missouri.

BARGAINS! Read The Ham Trader. Free copy or 25¢ issue. Box 153Q, Franklin Square, New York 11010.

PRINTED circuit boards. Hams, experimenters. Silver $2.85; Converter, March CQ, $1.50. Free catalog P/M Box 6288, Seattle, Washington 98188.

GALAXY sales have brought about several hundred trade-ins—KWM-1 $359; Champ 300A $229; King GSB-100 $259; HX-50 $299; 1 Apache $189; Valiant maker $169; 75A-3 $279; 75A-4 $389; SX-111 $16 $249; HRO-50T $159; HRO-60T $259, and many more free lists. Leo, WØGFQ, Box 919, Council Bluffs, Iow

CENTRAL ELECTRONICS 100-V—transmitter—6 bands— 40 and 75 meters, built-in vox and scope, s.s.b.—a etc. Like new $595. National NC-303 receiver with bu nuvistor 6—2 and 1¼ meter converters—perfect $ Model 262 plate modulated six and two meter trans in antenna-switch and relay. A-1 $160. Heath-impeda wired-perfect $70. Heath Q-meter, wired, perfec Francione, W2IDC, 146-07 Jamaica Avenue, Jamaica 3

COLLINS 75A-4 Serial No. 786—real clean. Will take over $325. P. J. Giacoma, 615 No. 9th St., St. Louis 1

DX-60 am-cw transmitter for sale. Complete with m and antenna relay. Brand new. Any reasonable offer. W. Barlind Dr., Pittsburgh 27, Penna, Tel. 881-1262.

WILL PAY any reasonable price for first class copie May and December 1945 and January 1946. Want c local or club ham publications, call books. A. R. M 461-3rd Ave., Sea Park, Eau Gallie, Florida.

SELL Waterman S-11A Pocket Scope $45.00 LM-1 meter with calibration and instruction manual and p $45.00 Drake Hy-Patch $20.00. Jim Manship, K4ET, 246-D, Greensboro, N.C.

GONSET G-50 transceiver $200; Hallicrafters S-120 r Both like new, perfect. Locascio, 8420 51st Avenu New York.

SALE Globe King 500-C $290, Hallicrafter S-40A TR-75A $20, Heath A-76 watt amp. $15, transisto Mon. $12, CDR TR-2 $20; Same Vol 1-20 & Binder Precise 7" vtvm $35, B&K 1075 TV-analyst $50, Prec 8" scope $50, Precision E-400 sweep gen. $65, AR recv. $10, 32-el. Cush-Craft 2 meter colinear $ camera w/flash, $20, Kodak 828 pony w/flash $20, bar gen $40; Simpson capacometer $45, Keystone 8 with light meter & lenses $60, 6146's new $4.25, B $40, Lampkin 105-B w/harm. gen, and attenuator $ Magera, W4YLT, Mullins, S.C.

WANTED KWS-1 preferably without power supply; KW Desk Kilowatt, Ray, W2LNP, 134 Wheatley Road, Glen Phone: 516-626-1384.

SP-600 JX-14 Ser. No. 7748 Excellent condition. modified, with manuals. Best offer over $200. Write P Young, 109 North Burke, Long Beach, Miss.

FICE New HT-37. (won in contest). Never plugged in. In as received from factory. $365, postpaid. George Hansen, obos, Pacific Grove, California.

AL ELECTRONICS 200-V. Mint condition. No scratches. Will n original crate. With manual. W4MZV, 616 Lakeview Drive, h, North Carolina.

R-274/SP-600-JX-1 Hammarlund receiver. $400. K5OBA, 1122 h, Stillwater, Okla.

ALE Moving and need cash. Selling complete ham rig which excellent condx and includes the following: Heath Warrior tt linear amplifier. Globe Scout xmtr/driver, with speech p and clipper. Hallicrafters HA-5 vfo. SX-99 receiver with rew preselector and Heath Q-mult. Hy-Gain TH-3 beam 0 foot tower and AR-22 rotator. WRL Ham desk with slope Plus accessories, i.e., Conelrad monitor, 65 feet RG-8/U, Key w/dpdt, mic, etc. Many items not even one year old. Garrett S. Friedman, 1920 E. 24 St., Brooklyn 29, N.Y. ES 6-0219.

NEE 6 meter transceiver for sale. Less than 3 months old n perfect condition. Must sell for personal reasons. $180. WA6GCP, 15929 Dalmation, LaMirada, California. Phone: A 1-3379.

SELL Landlord won't allow antennas. Modified Tower, 6 mo. th Heath 12 volt vibrator power supply. Halo, coax, crystals, ike $55. Harvey Wells R9-A receiver, speaker, and 40 meter . Also modified Sonar SRT-120 Transmitter with vfo. acrifice. WN2HQV, Joseph Klinitski, 106-09 Glenwood Rd., lyn 36, N.Y. Tel: NI 9-9207.

ED S-meter for Knight R-100 Receiver. One ma. movement. t Falls, 220 Jandell Road, Lorton, Va.

Knight T-150 $90. Homebrew swr meter $10. Approx. 150 ed CQ & QST 1953 to date. Best offer. Ray Robertson, IE, 37 Ogden Place, Morristown, N.J.

PUBLICATIONS Need space. will sell Proceedings IRE and ical Engineering, about 1935 through 1960. Also other magazines. William C. Reichard, Netcong, New Jersey.

NT II 225 dollars. all inquiries answered. will ship. K3VTZ, Conway Road, Bethesda, Maryland.

ALE Gonset GSB-100 ssb transmitter $290. I have not had the air. Apache mint condition $200. Hammarlund HQ-170C ammarlund i.f. noise silencer $270. All items guaranteed r like new. Ernst A. McCall, 10004 E. 34 Street, Independ- Mo.

OT Ez-Way tower with wonder post; CDR rotator; 5 el er beam and all ac $150. WA2MLL, 516 TU 8-1189.

YOUR mailing strip is IMPORTANT

X-62J2243Rc MAR 63

RONALD BUCHTER-WA2ZIM
75-40 BELL BLVD
BAYSIDE 64 LI NY

Whenever you write to CQ concerning your subscription, change of address, or renewal, cut your mailing strip from the wrapper of your latest copy and attach it to your letter.

This will help us to find your stencil in our files which is the first step in faster, more accurate service to our readers.

CQ Magazine
300 W 43 St., New York 36, N.Y.

$5.00 FREIGHT ALLOWANCE



SAVE
BUY FROM WRL

WRL SPIRE TOWERS

WRITE FOR ANTENNA PACKAGE INFO

SELF-SUPPORTING
3 SIZES 32', 40', 48'
All self-supporting with large tribander or other beams. May be extended to 120 ft. with proper guying.

3 MOUNTING BASES
(a) Rigid concrete mount. (b) Concrete mount with hinge base. (c) Earth anchor with hinge base (no concrete)
★ Fully galvanized
★ Aircraft riveted
★ Streamlined appearance
★ Includes rotor mount for Ham-M, AR22, etc.

NO MONEY DOWN

$58.85 32 FOOT RIGID CONCRETE MOUNT

All shipments are via truck, collect, with $5.00 frt. allowance.

"By Demand – Most Popular Tower in the USA"

WRL World Radio Laboratories, Inc.
3415 W. BROADWAY • PHONE 328 1851
COUNCIL BLUFFS, IOWA

For further information, check number 57, on page 110

HUNTER

LINEARS NOW IN STOCK AT A. E. S.

BANDIT
2000 A
(2000 watts PEP)
$575.00
Only $5 Down
$20.56 a month (36 months)





NEW Medium Power Linear
L 1000A
(1000 watts PEP)
$299.00
$5 Down
$10.61 a month (36 months)



POWER SUPPLY for L 1000A
$186.00
$5 Down
$6.55 a month (36 months)

PLUS TERRY'S TERRIFIC TRADE-IN DEAL

To order Use Coupon from other A.E.S. ads in this magazine

AMATEUR ELECTRONIC SUPPLY
3832 West Lisbon Ave., Milwaukee 8, Wis.

For further information, check number 58, on page 110

GUARANTEED CRYSTALS!

ALL MARINE FREQ.-FT-243, DC-34 Holders. Tol. .005% $2.50
POLICE, C.A.P., CD, MARS. Tol. .01% $2.00
CITIZENS BAND—11 METERS—.005% Tol.
26.965 to 27.225 MC, 3rd Over. Herm. Seal or FT-243 $2.95
13.4825 to 13.6125 MC, 2nd Harm.Herm. Seal or FT-243 $2.95
6741.25 to 6806.25 Kc, 4th Harm. FT-243 only $2.50

SPECIAL! STOCK CRYSTALS

$1.19 ea.

FT-243 Holders 5700 KC to 8700 KC in steps of 25 KC's

SEND FOR FREE CATALOG

DC-34 Holders 1690 KC to 4400 KC steps of 10 KC ea $1.19

NOVICE BAND FT-243 Fund. 1.49 ea.
80 Meter 3701-3748—Steps of 1 KC. FT-243
40 Meter 7150-7198—Steps of 1 KC. FT-243
Dbl. to 40 Meter 3576-3599. Steps of 1 KC. FT-243
15 Meter 5276-5312—7034-7083 Steps of 1 KC. FT-243

FT-243—2 Meters (Steps of 1 KC) $1.49
FT-243—6 Meters (Steps of 1 KC) $1.49
FT-243—From 3000-4000 $1.49
FT-243—From 1005-2999 (Steps of 5 KC) $2.50
FT-241 SSB Low Freq. Xtals 370 to 540 KC (Steps of 1.852 and 1.388) $ .69
FT-241 SSB Matched Pairs $2.39

Include 5c per crystal for postage (U. S. Only) Calif. add 4% Tax. No C.O.D.'s. Prices subject to change. Ind. 2nd choice; substitution may be necessary. MIN. ORDER $2.50

"The House of Crystals"

U. S. CRYSTALS, Inc.

1342 S. La Brea Ave. Los Angeles 19, Calif.

For further information, check number 14, on page 110

TRANSISTOR IGNITION

Improves gas mileage and acceleration. Extends plug and point life. Complete kit including integrated heat sink, 3 top brand transistors, and top quality components for rapid assembly. Instructions included. 1 Year guarantee
Complete kit—only $14.95 Wired & Tested $19.95
Postpaid U.S.A.

A & F ELECTROMART

1616 S. 81st Street • Milwaukee 14, Wis.

READER SERVICE

CQ Magazine, Dept. RS

300 WEST 43rd STREET
New York 36, N. Y.

Void after Oct. 28, 1963

Please send me more information on our ads in the Oct. 1963 *CQ* keyed as follows:

1	2	3	4	5	6	7	8	9	10	A
11	12	13	14	15	16	17	18	19	20	B
21	22	23	24	25	26	27	28	29	30	C
31	32	33	34	35	36	37	38	39	40	
41	42	43	44	45	46	47	48	49	50	D
51	52	53	54	55	56	57	58	59	60	E

Total Inquiries ☐

NAME _____
(Please Print)

Type of work (specify) _____

ADDRESS _____

CITY _____

ZONE _____ STATE _____

advertisers index

A & F Electro Mart
Allied Radio
Amateur Electronic Supply 80, 87, 92, 93, 96, 97, 108
Astatic Corporation

Back Issues
Barker & Williamson, Incorporated
Barry Electronics
Bonn Lew, Company
Burstein-Applebee Company

Clegg Laboratories
Cleveland Institute of Electronics
Collins Radio Company Cov
Communications Equipment Co.
Communication Products Company, Inc.

Dow-Key Company 100

E-Z Way Towers, Inc. 105
Electronic Circuits Handbook

Fair Radio Sales
Finney Company, The

Gain Inc.
Gonset Inc.
Greenlee Tool Company

Hallicrafters Company 2
Ham Mart
"Ham" Buerger
Ham Shop
Harvey Radio Company, Incorporated
Heath Company 21, 27, 2
Henry Radio Stores
Hy-Gain Antenna Products 8, 9, 1

Instructograph Company
International Crystal Manufacturing Co.

Johnson, E. F. Company

Lafayette Radio
Lampkin Laboratories, Incorporated
Lawrence Engineering Co.

Mid-West Electronic Supply
Millen, James Mfg. Co. Inc.
Mosley Electronics, Inc.

National Radio Company, Incorporated Cov
New-Tronics Corporation

P & H Electronics
Parks Electronics Laboratories
Pennwood Numechron Co.
Petersen Radio Co., Inc.
Polytronics Laboratories Inc.

Radio Amateur Call Book, Inc.
RCA Electric Components and Devices Cov
Raytronics

Selectronics
Shure
Squires-Sanders, Inc.
Supreme Electronics Inc.

Telrex Laboratories
Texas Crystals
Turner Microphone Co.

U. S. Crystals, Inc.

Vibroplex Co., Inc.

Webster Manufacturing
Western Radio Co.
Whippany Laboratories, Inc.
World Radio Labs Inc. 10

' 300 WINS IN THE STRETCH. A tough race all the way — it was neck and neck from th
ut Galaxy, through superior breeding (research and development), workouts (field-home
testing), and the best owner/trainer (World Radio Laboratories), came through in th
and is paying off big for hundreds of cheering hams. When you buy the Galaxy 300 (30
B/AM/CW transceiver, covering 80-40-20-meters) you've got a winner — $299.95 wired
e it a daily double with deluxe matching power $99.95. Like a full run-down? Mail th
. . . then you'll know why **hamdicappers** everywhere are choosing the Galaxy 300.

WORLD RADIO LABORATORIES
3415 West Broadway, Council Bluffs, Iowa

SEND ME FREE: ☐ RUNDOWN SHEET ON "GALAXY 300" ☐ ALL NEW WRL HAM CATALOG ☐ QUOTE ME "TRADE-IN" ON ATTACHED LETTER.

NAME_____

ADDRESS_____

CITY_____ ZONE____ STATE_____

ORLD RADIO LABORATORIES

Broadway • Council Bluffs, Iowa • Phone: 328-1851

For further information, check number 3, on page 110

from ALLIED

punch out a clean BIG SIGNAL with t

knight-kit® 150-Watt AM-CW Transmitt

GET TOP WATTS-PER-DOLLAR

- 150 Watts Peak AM/CW Input on 80 Thru 10-Meter Ham Bands
- Controlled-Carrier Modulation for Maximum Audio
- Stable VFO with Planetary Drive, "Spot" Switch
- Clean, Chirpless Keying—No HV Across Key
- Thorough TVI Shielding, Filtering, Bypassing
- Adjustable Pi-Network for 40 to 600-Ohm Antennas

Popular P-2 SWR/Power Meter Kit

ONLY **$15.95**

Now! Get the most from your transmitter and antenna! This easy-to-build "in-line" SWR/power meter measures relative power fed to antenna and standing waves reflected back from it. Lets you make your own matching adjustment between line and driven elements for maximum RF. Features flexible two unit design (coupler and indicator units) with 4-foot shielded connecting cable; has coax connectors; full KW capacity; can be left in line as constant monitor; reads SWR from 1:1 to 20:1; accuracy better than 10%; negligible insertion loss; for unbalanced 50-72 ohm lines, Amateur and CB; range from 1.8 to 432 mc; has sensitivity adjustment; no AC power or batteries required. Coupler, 2 x 5 x 2½"; indicator, 2⅞ x 6¼ x 3". Complete with all parts and instructions. Shpg. wt. 3 lbs.

83 Y 627FS. P-2 Kit, only..... **$15.95**

83 Y 546FS. As above, but factory-assembled **$22.95**

T-150A 150-Watt Transmitter K

ONLY **$119.95**

$6 monthly on Allied's Credit Fund Plan

Latest version of the rig acclaim satisfied owners everywhere. Lo with features to put out a solid s that really punches thru the Controlled-carrier screen modul for fine audio quality with negl distortion, plenty of mike gain top "talking power." Rock-stable fully calibrated for 6 bands, has illuminated sc backlash-free planetary drive, and spot switch to le "zero-in" without putting a signal on the air. 4- simultaneous-cathode keying circuit offers clear for break-in work—ideal for contests, traffic an chasing. Peak AM/CW inputs, 150 watts on 80 10 meters. 20 watts output on 6 meters. Other lights: Single-knob band-switching, adjustab network for 40 to 600 ohm antennas; VR tube in E VFO oscillator; buffer stage for isolation; standb mote standby and power takeoff plugs; power s using 2 silicon diodes in full-wave voltage doubler (filament power and eliminates heat); heater/plate age takeoff to power auxiliary gear, plus 117 antenna relay; PCIM mike connector; key jack. W parts, wire, solder instructions and handsome gray metal case, 8½ x 17 x 10½". Less mike, key, cry For 110-125 v. 60 cycle AC. 35 lbs.

83 YU 409FS. T-150A Transmitter Kit, only.... $1

PRAISED BY THE LEADING HAM JOURNALS!

satisfaction guaranteed or your money back

NO MONEY DOWN: Take advantage of your Allied Credit Fund Plan!

ORDER TODAY FROM

ALLIED RADIO

ORDER TODAY

ALLIED RADIO
100 N. Western Ave., Chicago 80, Ill.

Ship me the following:

- ☐ **T-150A Transmitter Kit 83 YU 409FS**
- ☐ **P-2 SWR/Power Meter Kit 83 Y 627FS**
- ☐ **P-2 SWR/Power Meter Assembled 83 Y 546FS**

$..... enclosed (check) (money order)

☐ Ship No Money Down on Allied's Credit Fund Plan

Name_____
PLEASE PRINT

Address_____

City_____ Zone____ State_____

For further information, check number 20, on page 110

fussbudget

n Taylor is Manager of National's Quality Control Division nd a fussbudget by profession. He and his staff make n that when you buy a National product you can be con- that every component part, every stage of assembly, every t of performance, was checked, re-checked, and approved the equipment was allowed to leave the factory. Stan nly one quota — 100% test and inspection — and only one on in "borderline" cases — "Will the customer be satis- hat his new rig meets National's advertised specifications rformance and workmanship in every respect?"

NCX-3 SSB Transceiver is a good case in point . . . Your hal Dealer will tell you that the NCX-3 outsells all other eivers by four or five to one. Why? It's a handsome fea- acked high performance rig — and it's well made. Con- ively rated parts, meticulous assembly, and the neatest you've seen in ham gear since the last sun spot cycle. en you try the NCX-3, you'll know at once that it is a eiver built not to a price . . . but to a standard. The same standard that allows National to offer a One-Year Guar- on the NCX-3 and on all other National Equipment. In addition, the NCX-3 at $369 is the only transceiver in its price range to include, as standard equipment, features that would be expensive "options" (if available) in other sets . . . features required for fixed station as well as mobile applications: complete coverage with overlap of the 80, 40, and 20 meter phone and CW bands. Built-in grid-block break-in keying with adjustable delay. Built-in VOX as well as push-to-talk. Built-in RF-derived SSB/CW AGC without pops or thumps at full RF gain. Built-in S-meter and PA current meter. Built-in AM detector for fully-compatible AM operation. Mobile mount included with each unit. Conservatively rated Pi-network final amplifier that runs black at 200 watts PEP.

Only a demonstration can give you a true picture of the performance of a National rig . . . but for your preliminary reference, we'd like you to accept a free copy of our complete catalog (and NCX-3 Instruction Manuals are also available at $1 ea.). Just send your name and address to: National Radio Company, Inc., 37 Washington Street, Melrose, Massachusetts 02176.

NATIONAL RADIO COMPANY, INC.

37 Washington St., Melrose 76, Mass.

For further information, check number 60, on page 110

Owned Subsidiary of National Company, Inc. World Wide Export Sales: Ad-Auriema Inc., 85 Broad St., N.Y.C. Canada: Tri-Tel Assoc., 81 Sheppard Ave. W., Willowdale, Ontario.

RCA HAM TIPS

A PUBLICATION OF THE RCA ELECTRON TUBE DIVISION

VOL. 23, NO. 1 ©1963, RADIO CORPORATION OF AMERICA WINTER, 1962-63

A MOBILE 50-WATT TRANSMITTER FOR THE SIX- AND TWO-METER BANDS

Part I

By M. R. Adams, WA2ELL, and P. B. Boivin, K2SKK

RCA Electron Tube Division, Harrison, N. J.

A continual increase in the number of technician-class operators is creating new peaks of activity on the six- and two-meter bands. This trend, of course, is most pronounced in metropolitan areas and is evidenced by the quantity and variety of commercial equipment now available for these bands. With the rising popularity of VHF mobile operation, many hams have been seeking new designs to help them achieve higher levels of operating convenience and economy. The use of both six and two meters by Civilian-Defense "RACES" units also makes operation on these bands attractive for emergency use. In a two-part article which [illegible] published in the Spring issue, the authors report on a compact, 50-watt amateur [illegible] under an auto dashboard and has a

RCA HAM TIPS

A PUBLICATION OF THE RCA ELECTRON TUBE DIVISION

VOL. 23, NO. 2 ©1963, RADIO CORPORATION OF AMERICA SPRING, 1963

A MOBILE 50-WATT TRANSMITTER FOR THE SIX- AND TWO-METER BANDS

Part II

By M. R. Adams, WA2ELL, and P. B. Boivin, K2SKK

RCA Electron Tube Division, Harrison, N. J.

The Winter, 1962-1963, issue of HAM TIPS presented the first installment of a two-part article on a compact, mobile-type 50-watt amateur bandswitching transmitter designed for coverage of the six- and two-meter bands and employing RCA "quick-heating" tube types 4604 and 7905 for added power economy. In that issue, the authors covered such considerations as circuit description, variable-frequency oscillator, multipliers, driver, final amplifier, modulators, metering, transmitter power requirements, and auxiliary antenna and receiver switching. The article is now concluded with a discussion of chassis construction and layout, bandswitching details, capacitor-mounting details, VFO design, driver shielding and construction details, final-amplifier layout, modulator details, VFO calibration and alignment, alignment procedure for multipliers and driver, and general conclusions and installation tips.

Front view of WA2ELL's and K2SKK's mobile 50-watt transmitter. Unit measures approximately 12 inches in width, 5 inches in height, and 10 inches in depth.

Chassis Construction and Layout

Templates for the chassis layout are shown in Figures 3, 4, and 5. The main chassis is made of 20-gauge sheet brass to facilitate ground connections. The socket straddle shield for V4 is fabricated from 24-gauge copper. Aluminum angle stock (1½-inch by ½-inch) is cut and drilled to tie together the front panel, main chassis, and modulator. Two more pieces of aluminum angle, ⅜-inch by ¾-inch, are attached to the top and bottom edges of the front panel to hold the cover. This type of construction results in a finished unit which can be dash-mounted and requires minimum space in the front seat of the vehicle. The use of a perforated sheet-steel cover, which is mounted in two halves, provides easy

New Quick-He
Beam Power T

THE IDEAL FINAL
DRIVER TEAM FO
50 WATTS "MOBI
ON "6" AND "2"

The mobile transmitter des
two issues of Ham Tips
uses a combination of new
power types—*literally d
each other.*

Both types reach full pow
about 1 second after filam
turned on—substantially r
tery drain during "standby

RCA-4604, the "final" tub
famous 6146—but has a
filament. RCA-7905, used
pliers, takes up to 15 watt
with approximately 1 wa
power. Like the 4604, Ty
has a fast-heating filament

From chassis punching to t
up, every detail of this
RCA-4604 and -7905 rig i
for you in Ham Tips Vol. 2
2. Ask your authorized R
tor for your copies. Or
mercial Engineering, Sect
Harrison, N.J.

RCA Electronic Comp
and Devices, Harriso

The Most Truste
in Electronics